
FED. SUP CLASS
2330

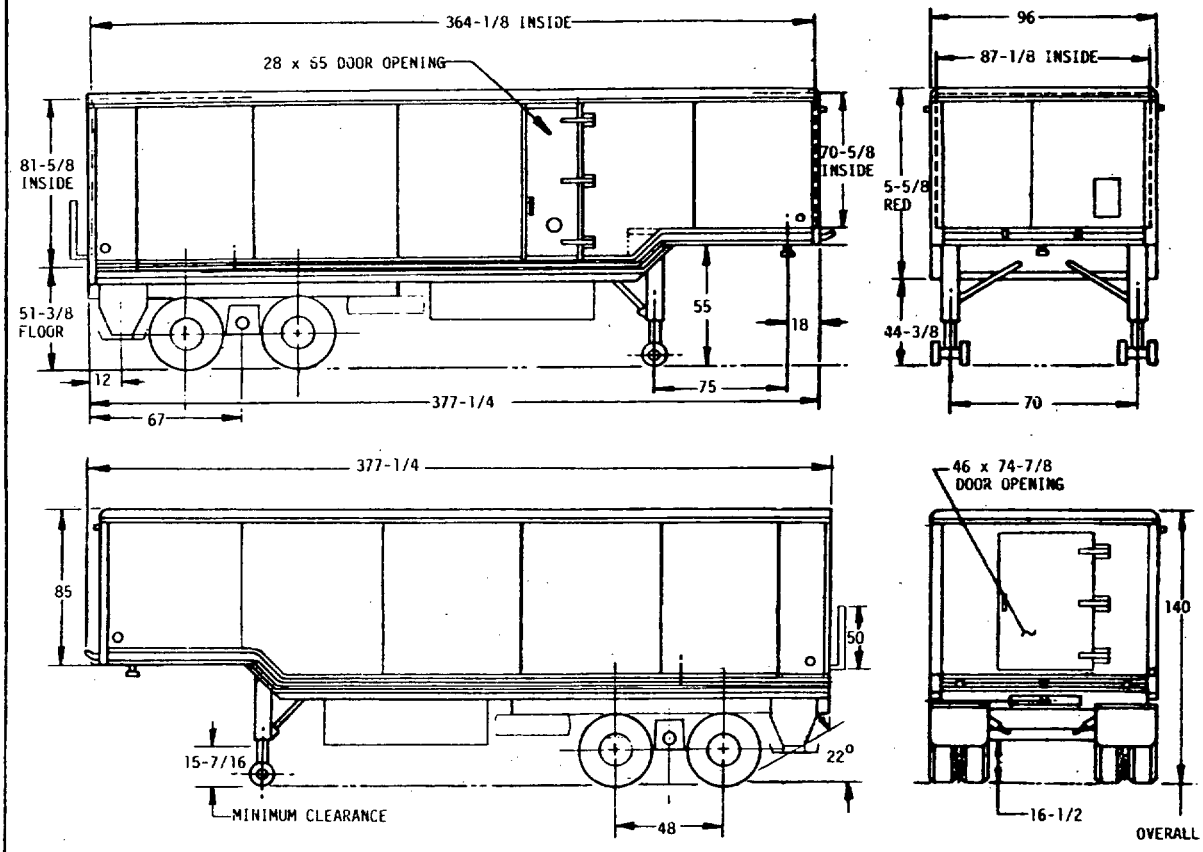

APPROVED 3 MAY 85 REVISED

MS PART NO.	ENGINEERING DWG NO
MS52163	8750047

P.A. ARMY - AT Other Cust	TITLE SEMITRAILER VAN: TACTICAL 4 WHEEL 4-1/2 TON M1006	MILITARY STANDARD MS52163(AT)
PROCUREMENT SPECIFICATION	SUPERSEDES:	SHEET 1 OF 2

DD FORM 1 SEP 87 672-1 LIMITED COORDINATION

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:21Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
2330

VEHICLE CHARACTERISTICS

PRIME MOVER: TRUCK, TRACTOR, 5-TON 6 x 6, M52 SERIES, M818 SERIES, M931 OR COMMERCIAL TRUCK COMPATIBLE WITH VAN.

CURB WEIGHT: 28,070 LBS

RATED CROSS-COUNTRY PAYLOAD 9000 LBS

LANDING GEAR: ADJUSTABLE, CRANK OPERATED.

VEHICLE ELECTRICAL SYSTEM: 12/24 VOLT SYSTEM

LIFTING EYES: TOTAL QUANTITY 4; 2 FRONT (ONE EACH SIDE), 2 REAR (ONE EACH SIDE)

AIRCRAFT VAN BODY TIEDOWNS: TOTAL 28 4 FRONT, 12 EACH SIDE, AND 2 REAR

TYPE: TACTICAL, NON-EXPANDABLE

WEIGHT DISTRIBUTION: SEMITRAILER COUPLED TO TRUCK AND EMPTY.

KINGPIN	9,230 LBS.
REAR AXLES	18,840 LBS.

WEIGHT DISTRIBUTION: SEMITRAILER COUPLED TO TRUCK; PAYLOAD EVENLY DISTRIBUTED.

CROSS-COUNTRY

KINGPIN	9,230 LBS.
REAR AXLES	18,840 LBS.

FORDING DEPTH: 5 FT.

MAXIMUM TOWING SPEEDS:

PAVED HIGHWAY	55 MPH
GRAVEL AND DIRT (SECONDARY ROADS)	30 MPH
LEVEL CROSS-COUNTRY	30 MPH
HILLY CROSS-COUNTRY	20 MPH
BELGIAN BLOCK	20 MPH
DIAGONAL CORDUROY ROAD	15 MPH
SPACED BUMP	15 MPH
2" WASHBOARD	5 MPH
RADIAL WASHBOARD	5 MPH

TIRE SIZE: 9:00 X 20, 8 PLY W/TUBE

SUSPENSION: LEAF SPRINGS, 36,000 LB (COMMERCIAL RATING)

LEVELING JACKS: TWO, REAR, ONE EACH SIDE. TO BE USED IN CONJUNCTION WITH INDEPENDENTLY OPERATED LANDING GEAR. VAN BODY CAN BE LEVELED ON SIDE SLOPES UP TO 2.6% AND ON LONGITUDINAL SLOPES UP TO 9.1% (WITH FRONT OF VAN FACING UPHILL).

DOLLY: REMOVABLE WITH SPARE TIRE ASSEMBLY, WITH DUAL AXLE ASSEMBLY AND LEVELING JACK ASSEMBLY, 12 BOLT QUICK DISCONNECT DOLLY.

INTERIOR LINER: ALUMINUM (6061-T6) PANELS RIVETED TO VAN BODY THERMAL WOOD BARRIER STRIPS. INTERIOR LINER IS ALSO USED AS A BACK-UP-RF/EMP BARRIER.

DOOR HINGES: TAMPER RESISTANT

SPARE TIRE: SPARE TIRE CAN BE LIFTED UP/LET DOWN MANUALLY WITH SPARE TIRE HOLDER.

AXLE RATING: 14,000 LBS. CAPACITY EACH AXLE. (TACTICAL RATING).

WHEELS: DUAL, SIZE 20 X 7-1/2, 6-1/4" OFFSET.

BRAKE SIZE: 16-1/2 X 5-1/2

BRAKE ACTUATION: AIR OVER HYDRAULIC SERVICE.

MISCELLANEOUS EQUIPMENT:

NAME	QUANTITY
CHOCK BLOCKS	4
BOARDING LADDERS	2, 3 STEP
MANUAL BOX	1
12 FOOT LADDER	1
SIDE PLATFORM	1
PERSONNEL LADDER HANDRAILS	2

DOOR LOCKS: ON INBOARD SURFACE OF DOORS, WITH ESCAPE-TYPE DOOR LOCK PERMITTING OPENING OF DOORS FROM INSIDE EVEN WHEN DOOR IS PADLOCKED FROM OUTSIDE. TAMPER RESISTANT.

KINGPIN: 2 INCH DIAMETER, RIGID WELDED IN PLACE.

TIRES: 900 20 (E) - TUBE TYPE, BIAS PLY TYPE, WITH STANDARD HIGHWAY TREAD.

EXTERIOR SKIN AND ROOF AND FLOOR PAN: CONSISTS OF PLAIN CARBON 12 GAGE (.1046" TK) CORTEC A SHEETS WELDED ALL-ROUND TO VAN BODY STRUCTURE.

VAN BODY STRUCTURE: CONSISTS OF WELDED TUBULAR RIB CONSTRUCTION SPACED ON 16" CENTERS. WALL POSTS AND ROOF BOWS ARE 3" X 6" TUBING, 3/16" WALL THICKNESS. FLOOR CROSSMEMBERS (LOCATED ABOVE THE FLOOR PAN) ARE 6" X 6" TUBING, 1/4" WALL THICKNESS.

GENERAL USAGE: SEMITRAILER VAN IS USED TO TRANSPORT AND HOUSE ELECTRONIC EQUIPMENT OVER ALL TYPES OF ROADS AND LIMITED CROSS-COUNTRY TERRAIN.

RF SHIELDING: THE VAN BODY (IN AS PROVIDED CONDITION) HAS THE BELOW LISTED MINIMUM SHIELDING EFFECT

ATTENUATION	FREQUENCY RANGE
40 DB	15 KHZ TO 100 KHZ
60 DB	100 KHZ TO 18 GHZ

NOTES:

1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES WHICH MAY BE OBTAINED FROM: US ARMY TANK-AUTOMOTIVE COMMAND, WARREN, MICH. 48090.
4. SUBJECT OF NATO STANAG (4609) (PART I). DO NOT REVISE OR CHANGE.

APPROVED 3 MAY 85 REVISED

MS PART NO.	ENGINEERING DWG NO
MS52163	8750047

P.A. ARMY - AT Other Cust	TITLE SEMITRAILER VAN: TACTICAL 4 WHEEL 4-1/2 TON M1006	MILITARY STANDARD MS52163(AT)
PROCUREMENT SPECIFICATION	SUPERSEDES:	SHEET 2 OF 2

DD FORM 1 SEP 87 672-1 LIMITED COORDINATION

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:21Z
Check the source to verify that this is the current version before use.