


REVIEW ACTIVITIES: ARMY—MU, EL

FED. SUP CLASS
2350

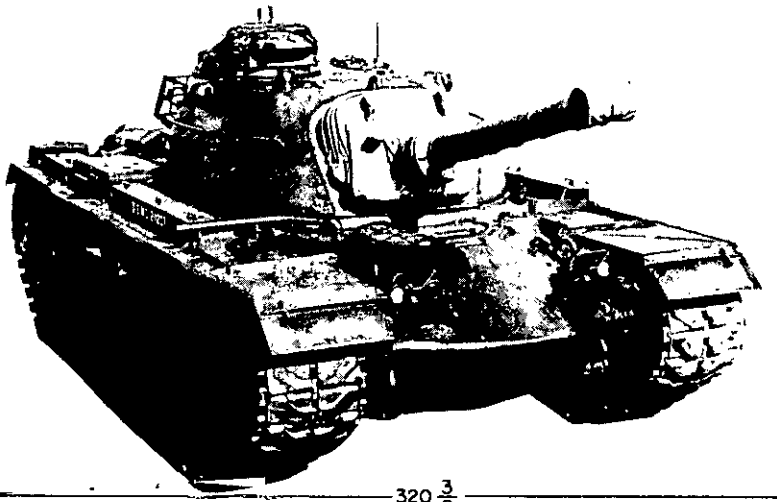

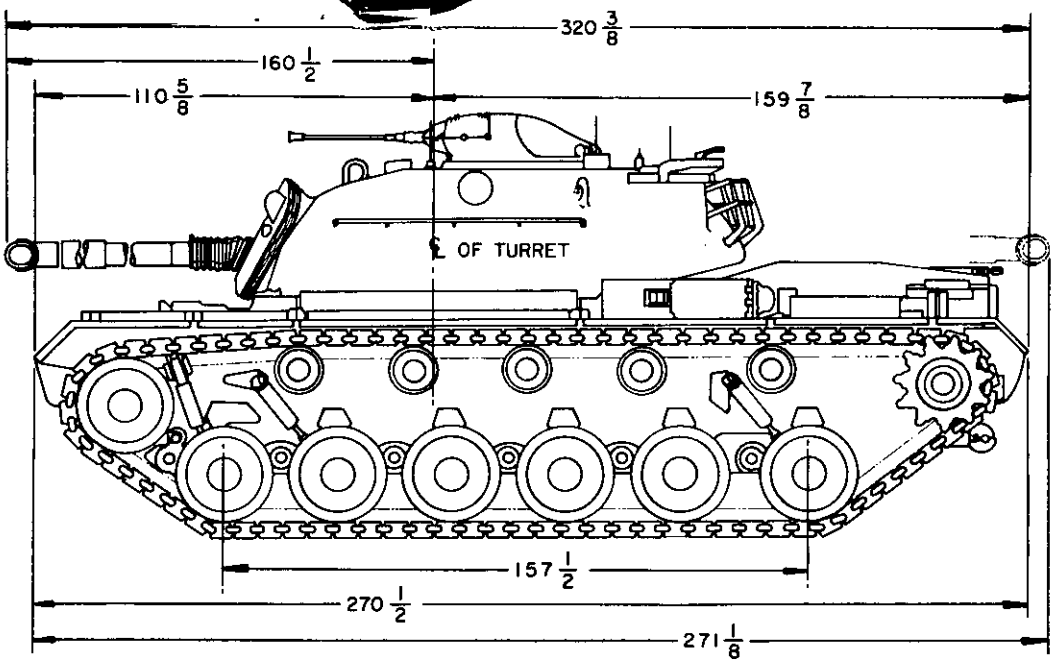

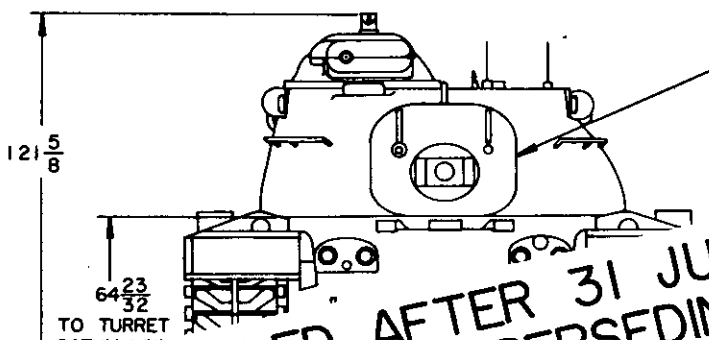

FLAME THROWER MECHANIZED, MAIN ARMAMENT, M7-6 MOD
DWG. NO B81-1-5970

(A) CANCELLED AFTER 31 JULY 1981. NO SUPERSEDING STANDARD.

NOTE:
ALL DIMENSIONS SHOWN ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.

APPROVED 26 AUGUST 1964 REVISED (A) 31 JUL 81

MS PART NO	DRAWING NO
MS 53081 —1	8750115

P.A. MO (ATAC) Other Cust	TITLE TANK, COMBAT, FULL TRACKED, FLAME THROWER, M67A2	MILITARY STANDARD MS 53081 (MO)
PROCUREMENT SPECIFICATION MIL-T-46781	SUPERSEDES:	SHEET 1 OF 2

This standard has been approved by the Department of the Army and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

DD FORM 1 SEP 67 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:21Z
Check the source to verify that this is the current version before use.

☆ U.S. GOVERNMENT PRINTING OFFICE: 1981—703-023/6618 2-1

REVIEW ACTIVITIES: ARMY—MU, EL

FED. SUP CLASS
2350

VEHICLE CHARACTERISTICS

GENERAL
WEIGHT (COMBAT LOADED) APPROX. 105,000 LBS.
CREW 3
WEIGHT (LESS CREW, STOWAGE AND FUEL) 100,000 LBS.
CENTER OF GRAVITY 7/8 IN. ABOVE AND 116 7/8 IN. FWD OF SPROCKET CENTER LINE
UNIT GROUND PRESSURE 11.9 LBS/SQ. INCH
TURRET RING 85 IN. DIAMETER (INSIDE)

VISION AND SIGHTING EQUIPMENT

PERISCOPE (VISION) DRIVER'S	TYPE M27	QTY. 3
PERISCOPE (IR VISION) DRIVER'S	TYPE M24	QTY. 1
PERISCOPE COMMANDER'S CUPOLA	TYPE M28C	QTY. 1
PERISCOPE MOUNT COMMANDER'S CUPOLA	TYPE M104A2	QTY. 1
VISION BLOCKS COMMANDER'S CUPOLA	PART No. 6300790	QTY. 5
PERISCOPE GUNNER'S	TYPE M30C	QTY. 1
PERISCOPE MOUNT GUNNER'S	TYPE M113	QTY. 1
QUADRANT, GUNNER'S	TYPE M1A1	QTY. 1

ARMAMENT
FLAME THROWER MECHANIZED, MAIN ARMAMENT, ASSEMBLY, M7-6 CONSISTING OF; 1 GUN, FLAME THROWER, MECHANIZED, ASSY. M6
PRIMARY 1 UNIT, FUEL AND PRESSURE, COMBAT VEHICLE, M7
TRAVERSE, RIGHT 360° LEFT 360° RATE 4 RPM
POWER, TYPE HYD MANUAL, TYPE GEAR TRAIN
ELEVATION 45° DEPRESSION 9°
STABILIZER SYSTEM NONE

SECONDARY ARMAMENT
1. CAL. 30 BROWNING, M1919A4 (COAXIAL) TURRET TRAVERSE 360° ELEVATION -9 TO +45°
2. CAL. 50, M2, HB (FLEX) AA GUN COMMANDER TRAVERSE 360° ELEVATION -15 TO +60°

OTHER: ONE (1) CAL. 45, M3A1

AMMUNITION
365 GALS. THICKENED FLAME THROWER FUEL
3500 RDS. CAL. 30 (MACH. GUN)
700 RDS. CAL. 50 (MACH. GUN)
180 RDS. CAL. 45 (SUB MACH. GUN)
OTHER: GRENADES 8 (HAND)

RUNNING GEAR
SUSPENSION, TYPE INDIVIDUAL TORSION BAR
NO. OF WHEELS 24 WHEEL SIZE 26x6 IN.
TRACK, TYPE T97E2
NO. OF SHOES/TRACK 79 PITCH 6 15/16 IN. WIDTH 28 IN.

ELECTRICAL SYSTEM
NOMINAL VOLTAGE 24 GENERATED VOLTAGE 28
GENERATOR, MAIN, AMPERES 300 MS 51004-1
BATTERY, MS 35000-3 QTY. 6 TYPE 6 TN (DRY)
BATTERY, MS 35000-4 QTY. 6 TYPE 6 TN (WET)
IGNITION SYSTEM, COMPRESSION IGNITION

POWER PACKAGE

ENGINE
TYPE 12 CYLINDER, 90° V AIR COOLED
PART No. 10912450
DISPLACEMENT 1791 CU. IN. BORE 5.75 IN. STROKE 5.75 IN.
GOVERNED SPEED 2400 RPM COMPRESSION RATIO 16:1
FUEL, DIESEL RATING, SPEC. VV-F-800

MAX. GROSS HORSEPOWER	750	@ 2400 RPM
MAX. NET HORSEPOWER	643	@ 2400 RPM
MAX. GROSS TORQUE	1710 LB/FT.	@ 1800 RPM
MAX. NET TORQUE	1575 LB/FT.	@ 1750 RPM

MAIN COOLING SYSTEM, AIR ENGINE OIL CAP. 72 QTS
OIL COOLING SYSTEM, ENGINE MOUNTED COOLERS AIR-COOLED WITH ENGINE DRIVEN FANS. (ENGINE AND POWER TRAIN)

POWER TRAIN
TYPE, CROSS DRIVE PART No. 8350025
HYDRAULIC CONVERTER SINGLE STAGE, MULTI PHASE
STEERING RATIO: HIGH RANGE 1.23:1, LOW RANGE 1.805:1
OVERALL USEABLE RATIO: LOW 10.85:1 HIGH 1.08:1 REV. 15.19:1
STEERING RATE 5.7 RPM TURNING RADIUS, PIVOT TO INFINITY
STEERING CONTROL MECHANICAL STEERING WHEEL
BRAKES MULTIPLE WET PLATE OPERATION MECHANICAL FOOT PEDAL
OIL COOLING SYSTEM, ENGINE MOUNTED COOLERS AIR-COOLED WITH ENGINE DRIVEN FANS

FINAL REDUCTION
TYPE, SPUR GEAR RATIO 5.08:1 FT./REV. 6.43
SPROCKET PITCH DIA. 24.504 IN. NO. OF TEETH 11

COMMUNICATIONS
RADIO SET AN/GRC-3, 4, 7 OR 8, AN/URC 7 AND AN/VIA-1
RADIO SET AN/GRC-3 OR 7, AN/ARC 27 PLUS AN/VIA-1

FIRE EXTINGUISHER
PART No. 7714476 FIXED (3) 10 LB. CO_2
PART No. 7714780 PORTABLE (1) 5 LB. CO_2

PERFORMANCE
GROSS HORSEPOWER TO WEIGHT RATIO 14 HP/TON
MAX. TRACTIVE EFFORT 70,000 LBS. TE/W 67%
MAX. SPEED 30 MPH MAX. GRADE 60%
MAX. TRENCH WIDTH CROSSING 102 IN. MAX. VERTICAL WALL 36 IN.
CRUISING RANGE 300 MILES
MAX. FORDING DEPTH 48 IN. WO/KIT 96 IN. W/KIT

THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED DRAWING NO. 8750115, COPY OF WHICH MAY BE OBTAINED FROM ARMY TANK-AUTOMOTIVE CENTER, WARREN, MICHIGAN
ATTN: STANDARDIZATION BRANCH

APPROVED 26 AUGUST 1964 REVISED

P.A. MO (ATAC) Other Cust	TITLE TANK, COMBAT, FULL TRACKED, FLAME THROWER, M67A2	MILITARY STANDARD MS 53081 (MO)
PROCUREMENT SPECIFICATION MIL-T-46781	SUPERSEDES:	SHEET 2

DD FORM 1 SEP 67 672-1 (Limited coverage) previous editions are obsolete.

This standard has been approved by the Department of the Army and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

Source: https://assist.dla.mil - Downloaded: 2026-10-29T20:21Z
Check the source to verify that this is the current version before use.