FED. SUP CLASS
1630

PLATE "A"
WHEEL DESIGN DETAIL


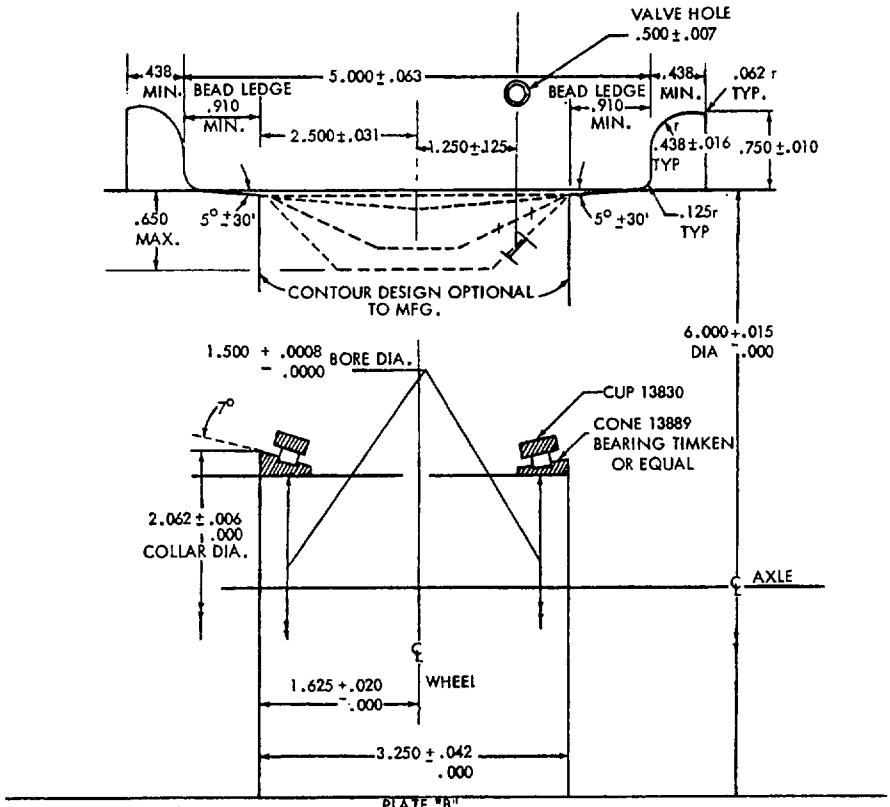


PLATE "B"
WHEEL FASTENING HOLES

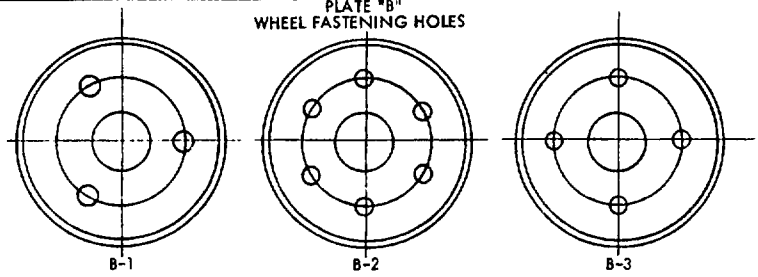

(A) ENTIRE STANDARD REVISED

APPROVED 27 AUGUST 1964 REVISED (A) 21 MARCH 1967

P.A. ARMY-AV Other Cust USAF-70	TITLE **WHEEL ASSEMBLY 6.00-6, TYPE III**	**MILITARY STANDARD** **MS 87014**
PROCUREMENT SPECIFICATION MIL-W-5013	SUPERSEDES: **NONE**	SHEET 1 OF 2

DD FORM 1 SEP 67 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

User Activities

Review Activities
Army – AV
Air Force – 70,11

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

NOTICE.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:30Z
Check the source to verify that this is the current version before use.

NOTICE.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

FED. SUP CLASS
1630

WHEEL ASSEMBLY

1. Wheel assembly 6.00-6 shall conform to the applicable requirements of MIL-W-5013; shall function satisfactorily when used with the tire and tube specified as type III in MIL-T-5041 and MIL-T-5014; and shall be capable of being readily assembled and disassembled.

2. There shall be no deviation from dimensions specified herein, except by written authorization of the contracting officer.

3. For test purposes, this standard requires submittal of three wheel assemblies from initial production; also, three wheel assemblies after completion of 25-percent production, but not later than the 50th production assembly, these wheels to be selected at random from the assembly line by the Quality Control Officer.

WHEEL DESIGN

1. Wheel design shall provide for use of grease seals on both the inboard and outboard sides; however, hub caps may be used on the outboard side provided prior approval has been obtained from the procuring activity.

2. Unless otherwise specified by the procuring activity, bolts shall be of AN or MS standard configuration. A minimum of three and a maximum of six bolts shall be used to fasten the wheel halves together (see Plate B of this standard). Wheel bolt fastenings shall be equidistant from one another.

PERFORMANCE

1. Wheel assembly shall meet the test requirements of MIL-W-5013, and as specified below:

(a) Loading incident to brake tests shall show no evidence of deterioration other than normally expected from satisfactory service equipment.

(b) Radial load of 15,000 pounds.

(c) Side load of 5,450 pounds.

(d) Burst test of 169 pounds per square inch.

(e) Roll test of 1,000 miles with a wheel loading of 1,600 pounds.

(f) Static unbalance of wheel shall not exceed 2 ounce-inches.

2. Tire and tube used in testing the wheel shall be in accordance with MIL-T-5041 and MIL-T-5014.

NOTES:

1. Prior to award of contract or order, approval of the contractor's project drawing and design data shall be obtained.

2. For design feature purposes, this standard takes precedence over procurement documents referenced herein.

3. Referenced documents shall be of the issue in effect on date of invitations for bid.

APPROVED 27 AUGUST 1964 REVISED (A) FOR CHANGES SEE SHEETS 1 AND 2

P.A. ARMY-AV Other Cust USAF -70	TITLE **WHEEL ASSEMBLY 6.00-6, TYPE III**	MILITARY STANDARD **MS 87014**
PROCUREMENT SPECIFICATION MIL-W-5013.	SUPERSEDES: **NONE**	SHEET 2 OF

DD FORM 1 SEP 67 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:30Z
Check the source to verify that this is the current version before use.