

MILITARY SPECIFICATION SHEET

# CAPACITORS, FIXED, ELECTROLYTIC (NONSOLID ELECTROLYTE), TANTALUM, (NONPOLARIZED, ETCHED FOIL), 85°C (VOLTAGE DERATED TO 125°C), ESTABLISHED RELIABILITY, STYLE CLR27

The complete requirements for procuring the capacitors described herein shall consist of this document and the latest issue of Specification MIL-C-39006.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

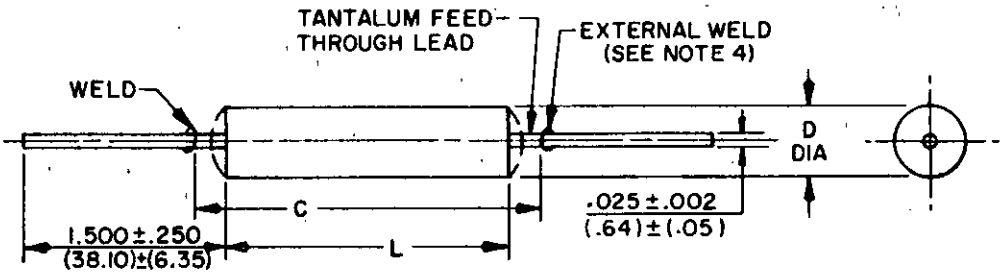


| © Case size | Dimensions | | | |
|---|---|---|---|---|
| | Basic case | | Insulated case | |
| | L 1/ ±.062(1.57) | D ±.016(.41) | D max | C max |
| E1 | .688(17.48) | .188(4.78) | .219 (5.56) | 1.188(30.18) |
| G2 | .969(24.61) | .281(7.14) | .312 (7.92) | 1.469(37.31) |
| G3 | 1.438(36.53) | .375(9.53) | .406(10.31) | 1.938(49.23) |
| G4 | 2.125(53.98) | .375(9.53) | .406(10.31) | 2.625(66.68) |
| G5 | 2.750(69.85) | .375(9.53) | .406(10.31) | 3.250(82.55) |

1/ Length of basic case; sleeving shall be as specified in MIL-C-39006.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are in parentheses.
3. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
4. The weld shall not be enclosed in the end seal.

FIGURE 1. Style CLR27 capacitors.

© denotes changes.



FSC 5910

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:14Z
Check the source to verify that this is the current version before use.

TABLE I Capacitor characteristics.

| Rated voltage (85° C) | Cap. | Cap. tolerance | DC leakage (max) 25° C | DC leakage (max) 85° C & 125° C | Derated voltage (125° C) | Surge voltage (85° C) | Impedance (max) | Case size | Part No. M39006/02- Failure rate level (%/1,000 hr) L(2.0) | M(1.0) | P(0.1) | R(0.01) | S(0.001) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| HERMETICALLY-SEALED | | | | | | | | | | | | | |
| volts, dc | μF | % | μA | μA | volts, dc | volts, dc | ohms | | | | | | |
| 15 | 40 | +75, -15 | 2 | 10 | 10 | 17.2 | 85 | G2 | 1200 | 1228 | 1256 | 1284 | 1312 |
| 15 | 120 | +75, -15 | 3 | 40 | 10 | 17.2 | 27 | G3 | 1201 | 1229 | 1257 | 1285 | 1313 |
| 15 | 250 | +75, -15 | 6 | 80 | 10 | 17.2 | 14 | G4 | 1202 | 1230 | 1258 | 1286 | 1314 |
| 15 | 350 | +75, -15 | 9 | 100 | 10 | 17.2 | 10 | G5 | 1203 | 1231 | 1259 | 1287 | 1315 |
| 25 | 20 | +75, -15 | 2 | 13 | 15 | 28.8 | 170 | G2 | 1204 | 1232 | 1260 | 1288 | 1316 |
| 25 | 70 | +75, -15 | 3 | 40 | 15 | 28.8 | 49 | G3 | 1205 | 1233 | 1261 | 1289 | 1317 |
| 25 | 140 | +75, -15 | 6 | 80 | 15 | 28.8 | 24 | G4 | 1206 | 1234 | 1262 | 1290 | 1318 |
| 25 | 200 | +75, -15 | 10 | 100 | 15 | 28.8 | 17 | G5 | 1207 | 1235 | 1263 | 1291 | 1319 |
| 30 | 18 | +75, -15 | 2 | 14 | 20 | 34.5 | 188 | G2 | 1208 | 1236 | 1264 | 1292 | 1320 |
| 30 | 60 | +75, -15 | 4 | 50 | 20 | 34.5 | 57 | G3 | 1209 | 1237 | 1265 | 1293 | 1321 |
| 30 | 120 | +75, -15 | 8 | 90 | 20 | 34.5 | 28 | G4 | 1210 | 1238 | 1266 | 1294 | 1322 |
| 30 | 170 | +75, -15 | 11 | 120 | 20 | 34.5 | 20 | G5 | 1211 | 1239 | 1267 | 1295 | 1323 |
| 50 | 10 | +50, -15 | 2 | 13 | 30 | 57.5 | 339 | G2 | 1212 | 1240 | 1268 | 1296 | 1324 |
| 50 | 30 | +50, -15 | 3 | 40 | 30 | 57.5 | 113 | G3 | 1213 | 1241 | 1269 | 1297 | 1325 |
| 50 | 60 | +50, -15 | 4 | 75 | 30 | 57.5 | 57 | G4 | 1214 | 1242 | 1270 | 1298 | 1326 |
| 50 | 80 | +50, -15 | 5 | 100 | 30 | 57.5 | 41 | G5 | 1215 | 1243 | 1271 | 1299 | 1327 |
| 75 | 6 | +50, -15 | 2 | 13 | 50 | 86.2 | 560 | G2 | 1216 | 1244 | 1272 | 1300 | 1328 |
| 75 | 15 | +50, -15 | 3 | 34 | 50 | 86.2 | 226 | G3 | 1217 | 1245 | 1273 | 1301 | 1329 |
| 75 | 35 | +50, -15 | 5 | 80 | 50 | 86.2 | 97 | G4 | 1218 | 1246 | 1274 | 1302 | 1330 |
| 75 | 50 | +50, -15 | 10 | 100 | 50 | 86.2 | 68 | G5 | 1219 | 1247 | 1275 | 1303 | 1331 |
| 100 | 4 | +30, -15 | 2 | 13 | 65 | 115.0 | 845 | G2 | 1220 | 1248 | 1276 | 1304 | 1332 |
| 100 | 12 | +30, -15 | 3 | 37 | 65 | 115.0 | 283 | G3 | 1221 | 1249 | 1277 | 1305 | 1333 |
| 100 | 25 | +30, -15 | 5 | 75 | 65 | 115.0 | 135 | G4 | 1222 | 1250 | 1278 | 1306 | 1334 |
| 100 | 35 | +30, -15 | 7 | 100 | 65 | 115.0 | 97 | G5 | 1223 | 1251 | 1279 | 1307 | 1335 |
| 150 | 2 | +30, -15 | 2 | 13 | 100 | 172.0 | 1693 | G2 | 1224 | 1252 | 1280 | 1308 | 1336 |
| 150 | 6 | +30, -15 | 3 | 30 | 100 | 172.0 | 565 | G3 | 1225 | 1253 | 1281 | 1309 | 1337 |
| 15 | 12 | +30, -15 | 5 | 80 | 100 | 172.0 | 283 | G4 | 1226 | 1254 | 1282 | 1310 | 1338 |
| 150 | 18 | +30, -15 | 8 | 100 | 100 | 172.0 | 188 | G5 | 1227 | 1255 | 1283 | 1311 | 1339 |
| Ⓒ NONHERMETICALLY-SEALED | | | | | | | | | | | | | |
| 15 | 10 | +75, -15 | 2 | 4 | 10 | 17.2 | 339 | E1 | 2200 | 2232 | 2264 | 2296 | 2328 |
| 25 | 5 | +75, -15 | 2 | 4 | 15 | 28.8 | 680 | E1 | 2205 | 2237 | 2269 | 2301 | 2333 |
| 30 | 4.5 | +75, -15 | 2 | 6 | 20 | 34.5 | 754 | E1 | 2210 | 2242 | 2274 | 2306 | 2338 |
| 50 | 2.5 | +50, -15 | 2 | 4 | 30 | 57.5 | 1355 | E1 | 2212 | 2244 | 2276 | 2308 | 2340 |
| 75 | 1.5 | +50, -15 | 2 | 4 | 50 | 86.2 | 2255 | E1 | 2217 | 2249 | 2281 | 2313 | 2345 |
| 100 | 1 | +30, -15 | 2 | 4 | 65 | 115.0 | 3385 | E1 | 2222 | 2254 | 2286 | 2318 | 2350 |
| 150 | 0.5 | +30, -15 | 2 | 4 | 100 | 172.0 | 6780 | E1 | 2227 | 2259 | 2291 | 2323 | 2355 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:14Z
Check the source to verify that this is the current version before use.

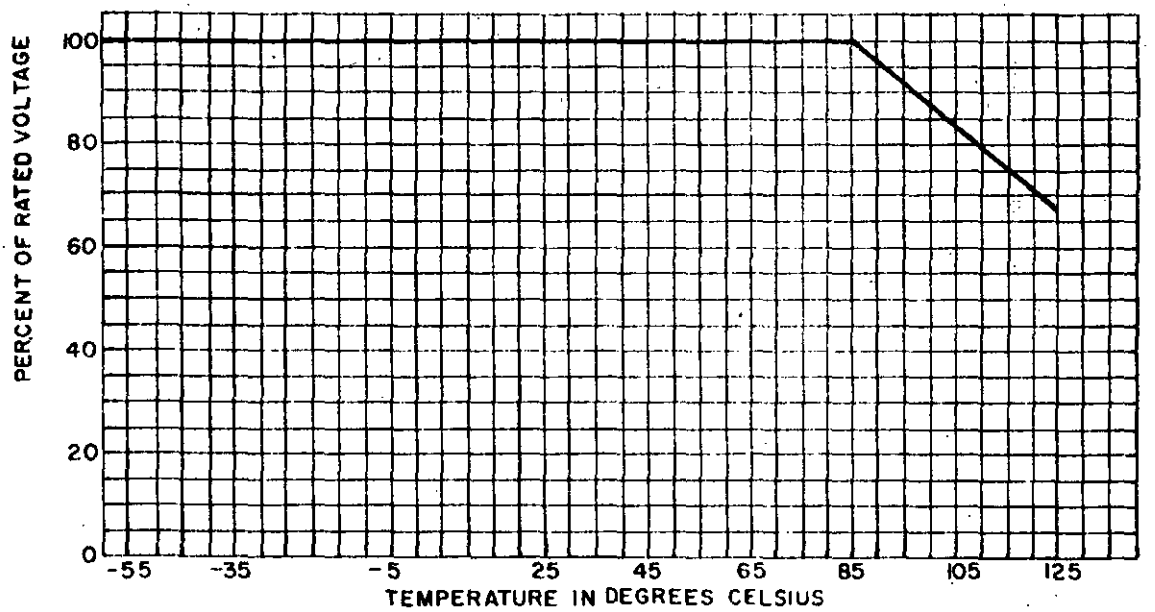



FIGURE 2. Voltage derating with temperature.

REQUIREMENTS:

*Design and construction:*
Dimensions and configuration - See figure 1.
Case type - Tubular, insulated.
Seal type - G (hermetic) or E (*nonhermetic*) as shown in table I.
Terminals - Axial-wire lead.
Rated temperature - -55° to +85°C, *voltage* derated to +125°C (see figure 2).
Rated voltage - See table I.
Capacitance (Cap.) (nom) - See table I.
Cap. tolerance - See table I.
FR level - See table I.

Constant voltage conditioning: As specified in MIL-C-39006.

DC leakage (DCL) (max) (at 25° C): See table I.

Cap. (nom): Method 305 of MIL-STD-202. See table I.

Dissipation factor (DF) (max):
50 volts and below - 20%.
Above 50 volts - 15%.

Seal (G seal type only): Method 112 of MIL-STD-202, conditions A and C.

Shock (specified pulse): Method 213 of MIL-STD-202, condition I (100G).

Vibration, high frequency: Method 204 of MIL-STD-202, condition D (20G).

Temperature cycling: Method 102 of MIL-STD-202, condition D (with step 3 at +125°C). Number of cycles - 30.
DCL - 125% (max) of 25°C value of table I.
ΔCap. - Within ±5% of initial measurement.
DF - 115% (max) of initial requirement.

Salt spray (corrosion): Method 101 of MIL-STD-202, *condition B* (48 hr).

Solderability: Method 208 of MIL-STD-202.

Terminal strength:
Pull - Method 211 of MIL-STD-202, condition A.
Wire-lead bend - In accordance with MIL-C-39006.

Surge voltage: See table I.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:14Z
Check the source to verify that this is the current version before use.

Moisture resistance: Method 106 of MIL-STD-202.
DCL - 125% (max) of 25°C value of table I.
ΔCap. - Within ±6% of initial measurement.
DF - 115% (max) of initial requirement.

Dielectric withstanding voltage (DWV): Method 301 of MIL-STD-202.
Test voltage - 2,000 vdc, min.

Insulation resistance (IR): Method 302 of MIL-STD-202, condition B. 100 megohms, min.

Low temperature(storage): Method 502 of MIL-STD-810.
DCL - See table I.
ΔCap. - Within ±5% of initial measurement.
DF - 20% (≤50v) or 15% (>50v) (max).

Stability at low and high temperatures:
Step 1 (+25°C):
DCL - See table I.
Cap. - Within tolerance of table I value.
DF - 20% (≤50v) or 15% (>50v) (max).
Step 2 (-55°C):
Imp. - See table I.
ΔCap. - -40% (≤50v) or -35% (>50v) of step 1 value (max).
Step 3 (+25°C):
DCL - See table I.
ΔCap. - Within ±5% of step 1 value.
DF - 20% (≤50v) or 15% (>50v) (max).
Step 4 (+85°C):
DCL - See table I.
ΔCap. - +20% of step 1 value (max).
DF - 30% (≤50v) or 20% (>50v) (max).
1/ Step 5 (+125°C):
DCL - See table I.
ΔCap. - +45% (≤30v) or +30% (>30v) of step 1 value (max).
DF - 40% (≤30v) or 30% (>30v) (max).
Step 6 (+25°C):
DCL - See table I.
ΔCap. - Within ±5% of step 1 value.
DF - 20% (≤50v) or 15% (>50v) (max).

Reverse voltage: Not applicable.

Life at 85°C: Method 108 of MIL-STD-202.
2,000-hr (qualification):
DCL - See table I.
ΔCap. - Within ±15% of initial measurement.
DF - 20% (≤50v) or 15% (>50v) (max).

240-hr (group B):
DCL - See table I.
ΔCap. - Within ±10% of initial measurement.
DF - 20% (≤50v) or 15% (>50v)(max).
10,000-hr (group C) and extended life:
DCL (85°C) - 125% (max) of table I value.
DCL (25°C) - See table I.
ΔCap. - Within ±25% of initial measurement.
DF - 40% (≤50v) or 30% (>50v)(max).
DWV - 2,000 vdc, min.
IR - 100 megohms, min.

Vacuum life (G seal type only):
DCL - See table I.
ΔCap. - Within ±20% of initial measurement.
DF - 20% (≤50v) or 15% (>50v)(max).
Weight loss - 4.1 mg, max.

1/ Life at 125°C: Method 108 of MIL-STD-202.
DCL - See table I.
ΔCap. - Within ±15% of initial measurement.
DF - 20% (≤30v) or 15% (>30v)(max).
DWV - 2,000 vdc, min.
IR - 100 megohms, min.

Barometric pressure: Method 105 of MIL-STD-202, condition E (150,000 ft).
Test voltage - Rated voltage.

Fungus: Method 508 of MIL-STD-810.

Resistance to solvents: Method 215 of MIL-STD-202.

Resistance to soldering heat: Method 210 of MIL-STD-202, condition B.
DCL - See table I.
ΔCap. - Within ±5% of initial measurement.
DF - 20% (≤50v) or 15% (>50v)(max).

Marking (except case size E1): In accordance with MIL-C-39006. E1 case size, mark as follows (the trademark may also be placed on the unit where space permits):

Example:
M39006/02-2200 - Part number.
J12345 - "J" for "JAN" brand and source code.
7144A - Date code and lot symbol.
10μF 15V - Capacitance and rated voltage.

1/ 125°C derated voltage referenced.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:14Z
Check the source to verify that this is the current version before use.

TABLE II. Substitutability data - "G" seal type.

| Dash no. in MIL-C-39006/2C and /2B | | | | | Substitutable for dash no. in: | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | MIL-C-39006/2A | | | | | 1/ MIL-C-39006/2 | | | | | 2/ MIL-C-39006/6 | | | | |
| L | M | P | R | S | L | M | P | R | S | L | M | P | R | S | L | M | P | R | S |
| 1200 | 1228 | 1256 | 1284 | 1312 | 1001 | 1025 | 1049 | 1073 | 1097 | 0006 | 0007 | 0008 | 0009 | 0010 | 0001 | 0002 | 0003 | 0004 | 0005 |
| 1201 | 1229 | 1257 | 1285 | 1313 | 1002 | 1026 | 1050 | 1074 | 1098 | 0011 | 0012 | 0013 | 0014 | 0015 | | | None | | |
| 1202 | 1230 | 1258 | 1286 | 1314 | 1003 | 1027 | 1051 | 1075 | 1099 | 0016 | 0017 | 0018 | 0019 | 0020 | | | None | | |
| 1203 | 1231 | 1259 | 1287 | 1315 | 1004 | 1028 | 1052 | 1076 | 1100 | 0021 | 0022 | 0023 | 0024 | 0025 | 0011 | 0012 | 0013 | 0014 | 0015 |
| 1204 | 1232 | 1260 | 1288 | 1316 | 1005 | 1029 | 1053 | 1077 | 1101 | 0031 | 0032 | 0033 | 0034 | 0035 | | | None | | |
| 1205 | 1233 | 1261 | 1289 | 1317 | 1006 | 1030 | 1054 | 1078 | 1102 | 0036 | 0037 | 0038 | 0039 | 0040 | | | None | | |
| 1206 | 1234 | 1262 | 1290 | 1318 | 1007 | 1031 | 1055 | 1079 | 1103 | 0041 | 0042 | 0043 | 0044 | 0045 | | | None | | |
| 1207 | 1235 | 1263 | 1291 | 1319 | 1008 | 1032 | 1056 | 1080 | 1104 | 0046 | 0047 | 0048 | 0049 | 0050 | | | None | | |
| 1208 | 1236 | 1264 | 1292 | 1320 | | | None | | | | | None | | | | | None | | |
| 1209 | 1237 | 1265 | 1293 | 1321 | | | None | | | | | None | | | | | None | | |
| 1210 | 1238 | 1266 | 1294 | 1322 | | | None | | | | | None | | | | | None | | |
| 1211 | 1239 | 1267 | 1295 | 1323 | | | None | | | | | None | | | | | None | | |
| 1212 | 1240 | 1268 | 1296 | 1324 | 1009 | 1033 | 1057 | 1081 | 1105 | 0056 | 0057 | 0058 | 0059 | 0060 | 0031 | 0032 | 0033 | 0034 | 0035 |
| 1213 | 1241 | 1269 | 1297 | 1325 | 1010 | 1034 | 1058 | 1082 | 1106 | 0061 | 0062 | 0063 | 0064 | 0065 | 0036 | 0037 | 0038 | 0039 | 0040 |
| 1214 | 1242 | 1270 | 1298 | 1326 | 1011 | 1035 | 1059 | 1083 | 1107 | 0066 | 0067 | 0068 | 0069 | 0070 | 0021 | 0022 | 0023 | 0024 | 0025 |
| 1215 | 1243 | 1271 | 1299 | 1327 | 1012 | 1036 | 1060 | 1084 | 1108 | 0071 | 0072 | 0073 | 0074 | 0075 | 0041 | 0042 | 0043 | 0044 | 0045 |
| 1216 | 1244 | 1272 | 1300 | 1328 | 1013 | 1037 | 1061 | 1085 | 1109 | 0081 | 0082 | 0083 | 0084 | 0085 | 0046 | 0047 | 0048 | 0049 | 0050 |
| 1217 | 1245 | 1273 | 1301 | 1329 | 1014 | 1038 | 1062 | 1086 | 1110 | 0086 | 0087 | 0088 | 0089 | 0090 | 0051 | 0052 | 0053 | 0054 | 0055 |
| 1218 | 1246 | 1274 | 1302 | 1330 | 1015 | 1039 | 1063 | 1087 | 1111 | 0091 | 0092 | 0093 | 0094 | 0095 | | | None | | |
| 1219 | 1247 | 1275 | 1303 | 1331 | 1016 | 1040 | 1064 | 1088 | 1112 | 0096 | 0097 | 0098 | 0099 | 0100 | 0056 | 0057 | 0058 | 0059 | 0060 |
| 1220 | 1248 | 1276 | 1304 | 1332 | 1017 | 1041 | 1065 | 1089 | 1113 | 0106 | 0107 | 0108 | 0109 | 0110 | 0061 | 0062 | 0063 | 0064 | 0065 |
| 1221 | 1249 | 1277 | 1305 | 1333 | 1018 | 1042 | 1066 | 1090 | 1114 | 0111 | 0112 | 0113 | 0114 | 0115 | 0066 | 0067 | 0068 | 0069 | 0070 |
| 1222 | 1250 | 1278 | 1306 | 1334 | 1019 | 1043 | 1067 | 1091 | 1115 | 0116 | 0117 | 0118 | 0119 | 0120 | | | None | | |
| 1223 | 1251 | 1279 | 1307 | 1335 | 1020 | 1044 | 1068 | 1092 | 1116 | 0121 | 0122 | 0123 | 0124 | 0125 | 0071 | 0072 | 0073 | 0074 | 0075 |
| 1224 | 1252 | 1280 | 1308 | 1336 | 1021 | 1045 | 1069 | 1093 | 1117 | 0131 | 0132 | 0133 | 0134 | 0135 | 0076 | 0077 | 0078 | 0079 | 0080 |
| 1225 | 1253 | 1281 | 1309 | 1337 | 1022 | 1046 | 1070 | 1094 | 1118 | 0136 | 0137 | 0138 | 0139 | 0140 | | | None | | |
| 1226 | 1254 | 1282 | 1310 | 1338 | 1023 | 1047 | 1071 | 1095 | 1119 | 0141 | 0142 | 0143 | 0144 | 0145 | | | None | | |
| 1227 | 1255 | 1283 | 1311 | 1339 | 1024 | 1048 | 1072 | 1096 | 1120 | 0146 | 0147 | 0148 | 0149 | 0150 | 0086 | 0087 | 0088 | 0089 | 0090 |

1/ Dash nos. 0001 thru 0005; 0026 thru 0030; 0051 thru 0055; 0076 thru 0080; 0101 thru 0105; and 0126 thru 0130 deleted with no replacement.

2/ Dash nos. 0006 thru 0010; 0016 thru 0020; 0026 thru 0030; and 0081 thru 0085 deleted with no replacement.





Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:14Z
Check the source to verify that this is the current version before use.

TABLE III. Substitutability data - "E" seal type.

| Dash no. in MIL-C-39006/2C and /2B | | | | | Substitutable for dash no. in: | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | MIL-C-39006/2B | | | | | MIL-C-39006/2A | | | | | MIL-C-39006/12 | | | | |
| L | M | P | R | S | L | M | P | R | S | L | M | P | R | S | L | M | P | R | S |
| 1200 | 1228 | 1256 | 1284 | 1312 | 2201 | 2233 | 2265 | 2297 | 2329 | 2002 | 2032 | 2062 | 2092 | 2122 | 0006 | 0007 | 0008 | 0009 | 0010 |
| 1201 | 1229 | 1257 | 1285 | 1313 | 2202 | 2234 | 2266 | 2298 | 2330 | 2003 | 2033 | 2063 | 2093 | 2123 | 0011 | 0012 | 0013 | 0014 | 0015 |
| 1202 | 1230 | 1258 | 1286 | 1314 | 2203 | 2235 | 2267 | 2299 | 2331 | 2004 | 2034 | 2064 | 2094 | 2124 | 0016 | 0017 | 0018 | 0019 | 0020 |
| 1203 | 1231 | 1259 | 1287 | 1315 | 2204 | 2236 | 2268 | 2300 | 2332 | 2005 | 2035 | 2065 | 2095 | 2125 | 0021 | 0022 | 0023 | 0024 | 0025 |
| 1204 | 1232 | 1260 | 1288 | 1316 | 2206 | 2238 | 2270 | 2302 | 2334 | 2007 | 2037 | 2067 | 2097 | 2127 | 0031 | 0032 | 0033 | 0034 | 0035 |
| 1205 | 1233 | 1261 | 1289 | 1317 | 2207 | 2239 | 2271 | 2303 | 2335 | 2008 | 2038 | 2068 | 2098 | 2128 | 0036 | 0037 | 0038 | 0039 | 0040 |
| 1206 | 1234 | 1262 | 1290 | 1318 | 2208 | 2240 | 2272 | 2304 | 2336 | 2009 | 2039 | 2069 | 2099 | 2129 | 0041 | 0042 | 0043 | 0044 | 0045 |
| 1207 | 1235 | 1263 | 1291 | 1319 | 2209 | 2241 | 2273 | 2305 | 2337 | 2010 | 2040 | 2070 | 2100 | 2130 | 0046 | 0047 | 0048 | 0049 | 0050 |
| 1208 | 1236 | 1264 | 1292 | 1320 | 2211 | 2243 | 2275 | 2307 | 2339 | | | None | | | | | None | | |
| 1209 | 1237 | 1265 | 1293 | 1321 | | | None | | | | | None | | | | | None | | |
| 1210 | 1238 | 1266 | 1294 | 1322 | | | None | | | | | None | | | | | None | | |
| 1211 | 1239 | 1267 | 1295 | 1323 | | | None | | | | | None | | | | | None | | |
| 1212 | 1240 | 1268 | 1296 | 1324 | 2213 | 2245 | 2277 | 2309 | 2341 | 2012 | 2042 | 2072 | 2102 | 2132 | 0056 | 0057 | 0058 | 0059 | 0060 |
| 1213 | 1241 | 1269 | 1297 | 1325 | 2214 | 2246 | 2278 | 2310 | 2342 | 2013 | 2043 | 2073 | 2103 | 2133 | 0061 | 0062 | 0063 | 0064 | 0065 |
| 1214 | 1242 | 1270 | 1298 | 1326 | 2215 | 2247 | 2279 | 2311 | 2343 | 2014 | 2044 | 2074 | 2104 | 2134 | 0066 | 0067 | 0068 | 0069 | 0070 |
| 1215 | 1243 | 1271 | 1299 | 1327 | 2216 | 2248 | 2280 | 2312 | 2344 | 2015 | 2045 | 2075 | 2105 | 2135 | 0071 | 0072 | 0073 | 0074 | 0075 |
| 1216 | 1244 | 1272 | 1300 | 1328 | 2218 | 2250 | 2282 | 2314 | 2346 | 2017 | 2047 | 2077 | 2107 | 2137 | 0081 | 0082 | 0083 | 0084 | 0085 |
| 1217 | 1245 | 1273 | 1301 | 1329 | 2219 | 2251 | 2283 | 2315 | 2347 | 2018 | 2048 | 2078 | 2108 | 2138 | 0086 | 0087 | 0088 | 0089 | 0090 |
| 1218 | 1246 | 1274 | 1302 | 1330 | 2220 | 2252 | 2284 | 2316 | 2348 | 2019 | 2049 | 2079 | 2109 | 2139 | 0091 | 0092 | 0093 | 0094 | 0095 |
| 1219 | 1247 | 1275 | 1303 | 1331 | 2221 | 2253 | 2285 | 2317 | 2349 | 2020 | 2050 | 2080 | 2110 | 2140 | 0096 | 0097 | 0098 | 0099 | 0100 |
| 1220 | 1248 | 1276 | 1304 | 1332 | 2223 | 2255 | 2287 | 2319 | 2351 | 2022 | 2052 | 2082 | 2112 | 2142 | 0106 | 0107 | 0108 | 0109 | 0110 |
| 1221 | 1249 | 1277 | 1305 | 1333 | 2224 | 2256 | 2288 | 2320 | 2352 | 2023 | 2053 | 2083 | 2113 | 2143 | 0111 | 0112 | 0113 | 0114 | 0115 |
| 1222 | 1250 | 1278 | 1306 | 1334 | 2225 | 2257 | 2289 | 2321 | 2353 | 2024 | 2054 | 2084 | 2114 | 2144 | 0116 | 0117 | 0118 | 0119 | 0120 |
| 1223 | 1251 | 1279 | 1307 | 1335 | 2226 | 2258 | 2290 | 2322 | 2354 | 2025 | 2055 | 2085 | 2115 | 2145 | 0121 | 0122 | 0123 | 0124 | 0125 |
| 1224 | 1252 | 1280 | 1308 | 1336 | 2228 | 2260 | 2292 | 2324 | 2356 | 2027 | 2057 | 2087 | 2117 | 2147 | 0131 | 0132 | 0133 | 0134 | 0135 |
| 1225 | 1253 | 1281 | 1309 | 1337 | 2229 | 2261 | 2293 | 2325 | 2357 | 2028 | 2058 | 2088 | 2118 | 2148 | 0136 | 0137 | 0138 | 0139 | 0140 |
| 1226 | 1254 | 1282 | 1310 | 1338 | 2230 | 2262 | 2294 | 2326 | 2358 | 2029 | 2059 | 2089 | 2119 | 2149 | 0141 | 0142 | 0143 | 0144 | 0145 |
| 1227 | 1255 | 1283 | 1311 | 1339 | 2231 | 2263 | 2295 | 2327 | 2359 | 2030 | 2060 | 2090 | 2120 | 2150 | 0146 | 0147 | 0148 | 0149 | 0150 |

| Dash no. in MIL-C-39006/2C and /2B | | | | | Substitutable for dash no. in: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | MIL-C-39006/2A | | | | | MIL-C-39006/12 | | | | |
| L | M | P | R | S | L | M | P | R | S | L | M | P | R | S |
| 2200 | 2232 | 2264 | 2296 | 2328 | 2001 | 2031 | 2061 | 2091 | 2121 | 0001 | 0002 | 0003 | 0004 | 0005 |
| 2205 | 2237 | 2269 | 2301 | 2333 | 2006 | 2036 | 2066 | 2096 | 2126 | 0026 | 0027 | 0028 | 0029 | 0030 |
| 2210 | 2242 | 2274 | 2306 | 2338 | | | None | | | | | None | | |
| 2212 | 2244 | 2276 | 2308 | 2340 | 2011 | 2041 | 2071 | 2101 | 2131 | 0051 | 0052 | 0053 | 0054 | 0055 |
| 2217 | 2249 | 2281 | 2313 | 2345 | 2016 | 2046 | 2076 | 2106 | 2136 | 0076 | 0077 | 0078 | 0079 | 0080 |
| 2222 | 2254 | 2286 | 2318 | 2350 | 2021 | 2051 | 2081 | 2111 | 2141 | 0101 | 0102 | 0103 | 0104 | 0105 |
| 2227 | 2259 | 2291 | 2323 | 2355 | 2026 | 2056 | 2086 | 2116 | 2146 | 0126 | 0127 | 0128 | 0129 | 0130 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:14Z
Check the source to verify that this is the current version before use.

Voltage groups (85°C rated voltage):
I - - - - - - - - - - - 15 to 100v incl
II - - - - - - - - - - - 150v

NOTE: The capacitors covered by this specification sheet are considered substitutable with the capacitors listed in table II or III.

Custodians:
Army - EL
Navy - EC
Air Force - 11

Review activities:
Army - MU
Navy - SH
Air Force - 17, 80
DSA - ES

User activities:
Army -
Navy - AS, MC, OS
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DSA - ES

(Project 5910-1055-2)



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:14Z
Check the source to verify that this is the current version before use.

**INSTRUCTIONS:** *In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge (DO NOT STAPLE), and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.*

*NOTE:* **This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.**

*(Fold along this line)*

*(Fold along this line)*

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

**BUSINESS REPLY MAIL**
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commander
Naval Electronic Systems Command (ELEX 8111)
Washington, DC 20360

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:14Z
Check the source to verify that this is the current version before use.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

# STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

*(See Instructions – Reverse Side)*

| 1. DOCUMENT NUMBER | 2. DOCUMENT TITLE |
|---|---|
| | |

| 3a. NAME OF SUBMITTING ORGANIZATION | 4. TYPE OF ORGANIZATION *(Mark one)* |
|---|---|
| | ☐ VENDOR<br>☐ USER<br>☐ MANUFACTURER<br>☐ OTHER *(Specify)*: _____ |
| b. ADDRESS *(Street, City, State, ZIP Code)* | |
| | |

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

| 7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional | b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional |
|---|---|
| c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional | 8. DATE OF SUBMISSION *(YYMMDD)* |
| | |

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:14Z
Check the source to verify that this is the current version before use.