INCH-POUND

MIL-R-39005/5F
6 November 1989
SUPERSEDING
MIL-R-39005/5E
28 May 1986

MILITARY SPECIFICATION

RESISTORS, FIXED, WIRE-WOUND (ACCURATE), ESTABLISHED RELIABILITY STYLE RBR56

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the detail requirements for style RBR56, established reliability, accurate, wire-wound, fixed resistors.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATION

MILITARY

MIL-R-39005 - Resistors, Fixed, Wire-Wound (Accurate), Established Reliability, General Specification for.

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Naval Publications and Forms Center, (ATTN: NPODS), 5801 Tabor Avenue, Philadelphia, PA 19120-5099.)

2.2 Order of precedence. In the event of a conflict between the text of this document and the reference cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Laboratory Command, ATTN: SLCET-R-S, Fort Monmouth, NJ 07703-5000 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 5905
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:10Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Requirements. Requirements shall be in accordance with MIL-R-39005, and as specified herein.

3.2 Design and construction. The resistor shall be of the design, construction, and physical dimensions specified on figure 1.

3.3 Minimum resistance value and applicable tolerance. Minimum resistance value shall be 0.1 ohm for tolerance F (±1.0 percent). For tolerances B, A, Q, T (±.10, ±.05, ±.02, and ±.01 percent, respectively), the minimum resistance value shall be 10 ohms.

3.4 Maximum resistance value. Maximum resistance values and applicable wire sizes shall be as follows:

Nominal wire size (inches) diameter	Absolute diameter	Maximum resistance value (megohms)
.001	.0009	.100
.0009	.00081	.150
.0008	.00072	.220

3.5 Power rating. Power rating shall be 1/8 watt.

3.6 Maximum voltage. Maximum voltage shall be 150 volts direct current or peak.

3.7 Maximum weight. The maximum weight shall be 1.5 grams.

3.8 Marking. Due to the size limitations, this style resistor may be marked by the following alternate method.

12345 - Source code
7333J - Date code and JAN marking
RBR56
12601 - Type designation
FM
***** - Manufacturer's production lot code

4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection. Sampling and inspection shall be in accordance with MIL-R-39005.

5. PACKAGING


5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-R-39005.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Notes. In addition to the notes specified herein, the notes specified in MIL-R-39005 are applicable to this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:10Z
Check the source to verify that this is the current version before use.

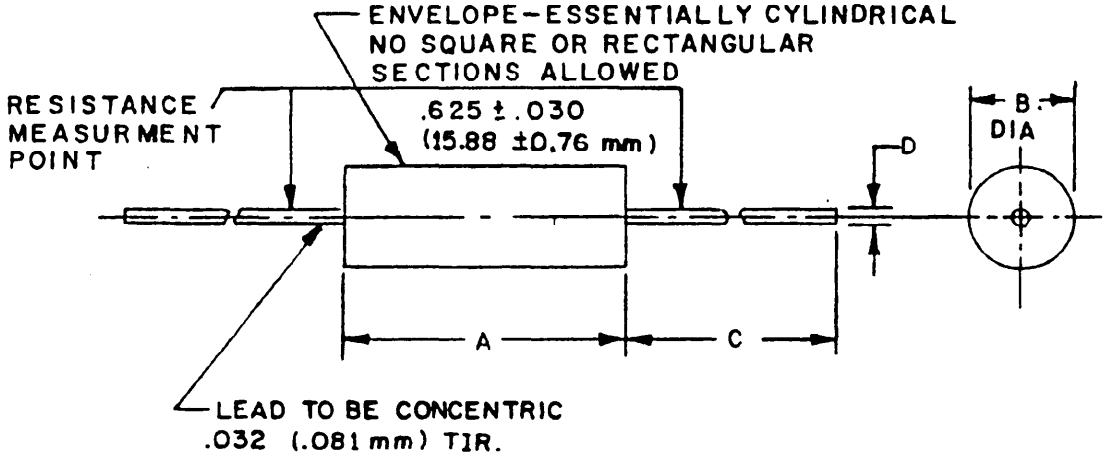

Dimension	Inches	Millimeters
A	.344 +.020 -.032	8.74 +0.51 -0.81
B	.250 ±.015	6.35 ±0.38
C	1.500 min	38.10
D	.032 ±.002	0.81 ±0.05

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Dimension A is clean lead to clean lead.

* FIGURE 1. Style RBR56 resistor.

Source: https://assist.dla.mil -- Downloaded: 202610-21T16:10Z
Check the source to verify that this is the current version before use.

* 6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of the specification.

b. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1).

6.3 Supplementary insulation. Where potential to ground is over 250 volts, supplementary insulation should be provided.

6.4 MIL-R-93 substitution data. Resistors of this specification, regardless of their failure rate designation, are substitutes for resistors of the same resistance value and tolerance specified in the inactivated specification MIL-R-93/14.

6.5 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army -AR, MI
Navy - AS, OS
Air Force - 17
DLA - ES

User activities:
Army - AT, AV, ME
Navy - MC
Air Force - 19

Preparing activity:
Army - ER

Agent:
DLA - ES

(Project 5905-1171)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:10Z
Check the source to verify that this is the current version before use.