MILITARY SPECIFICATION

RESISTORS, FIXED, WIRE-WOUND (ACCURATE),

ESTABLISHED RELIABILITY

STYLE RBR71

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1. Scope. This specification covers the detail requirements for style RBR71, established reliability, accurate, wire-wound, fixed resistors.

2. APPLICABLE DOCUMENTS

2.1 Government document.

2.1.1 Specification. The following specification forms a part of this specification to the extent specified herein. Unless otherwise specified, the issue of this document shall be that listed in the issue of the Department of Defense Index of Specifications and Standards and supplement thereto, cited in the solicitation.

SPECIFICATION

MILITARY

MIL-R-39005 - Resistors, Fixed, Wire-Wound (Accurate), Established Reliability, General Specification for.

(Copies of the specification required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.2 Order of precedence. In the event of a conflict between the text of this specification and the reference cited herein (except for associated detail specifications, specification sheets or MS standards), the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Requirements. Requirements shall be in accordance with MIL-R-39005, and as specified herein.


3.2 Design and construction. The resistor shall be of the design, construction, and physical dimensions specified on figure 1.

3.3 Minimum resistance value and applicable tolerance. Minimum resistance value shall be 0.1 ohm, for tolerance F (±1.0 percent). For tolerances B, A, Q, T (±.10, .05, .02, and .01 percent respectively), the minimum resistance value shall be 10 ohms.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Electronics Research and Development Command, ATTN: DELET-R-S, Fort Monmouth, NJ 07703-5302 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202640-21T16:10Z
Check the source to verify that this is the current version before use.

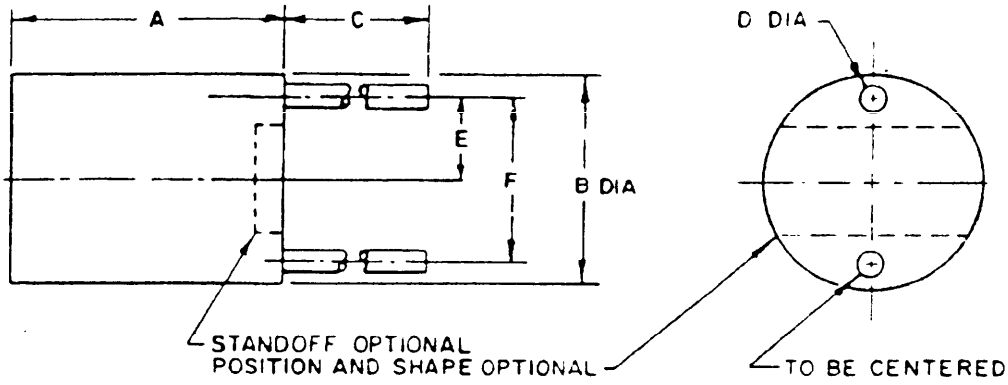

Dimension	Inches	Millimeters
A	.312 ±.031	8.71 - 7.14
B	.250 ±.031	7.14 - 5.56
C	1.000 MIN	25.4 MIN
D	.025 ±.002	0.69 - 0.58
E	.100 ±.002	2.59 - 2.49
F	.200 ±.010	5.33 - 4.83

Note: Metric equivalents are given for general information only.

FIGURE 1. Style PBR71 resistor.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:10Z
Check the source to verify that this is the current version before use.

3.4 Maximum resistance value. Maximum resistance values and applicable wire sizes shall be as follows:

Nominal wire size (inches) diameter	Absolute diameter	Maximum resistance value (megohms)
.001	.0009	.100
.0009	.00081	.130
.0008	.00072	.150

3.5 Power rating. Power rating shall be .125 watt.

3.6 Maximum voltage. Maximum voltage shall be 150 volts direct current or peak.

3.7 Maximum weight. The maximum weight shall be 1.5 grams.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Sampling and inspection. Sampling and inspection shall be in accordance with MIL-R-39005.

* 5. PACKAGING

5.1 Packaging. Packaging shall be in accordance with MIL-R-39005.

6. NOTES

6.1 Notes. In addition to the notes specified herein, the notes specified in MIL-R-39005 are applicable to this specification.

6.2 Supplementary insulation. Where potential to ground is over 250 volts, supplementary insulation should be provided.

6.3 MIL-R-93 substitution data. Resistors of this specification, regardless of their failure rate designation, are substitutes for resistors of the same resistance value and tolerance specified in the inactivated specification MIL-R-93/20.

6.4 Changes from previous issue. The margins of this specification are marked with asterisks to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - ER
Navy - EC
Air Force - 11

Review activities:
Army - AR, MI
Navy - AS, OS
Air Force - 17, 85
DLA - ES

User activities:
Army - ME, AT, AV
Navy - MC, CG
Air Force - 19

Preparing activity:
Army - ER

Agent:
DLA - ES

(Project 5905-1065)

Source: https://assist.dla.mil -- Downloaded: 202610-21T16:10Z
Check the source to verify that this is the current version before use.