INCH-POUND

MIL-DTL-24175/2B(SH)
14 July 2026
SUPERSEDING
MIL-P-24175/2A(SHIPS)
27 August 1971

DETAIL SPECIFICATION SHEET

# PANEL, POWER SUPPLY AND CONTROL FOR NAVIGATION LIGHTS, NWT, 10 AMPERES, 120 VOLTS AC, 60 HERTZ 3 PHASE BUS, 8 CIRCUITS, SYMBOL NO. 940.1

This specification is approved for use by Naval Sea Systems Command and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-24175.

| Part or identifying number (PIN) |
|---|
| M24175/2-001 |

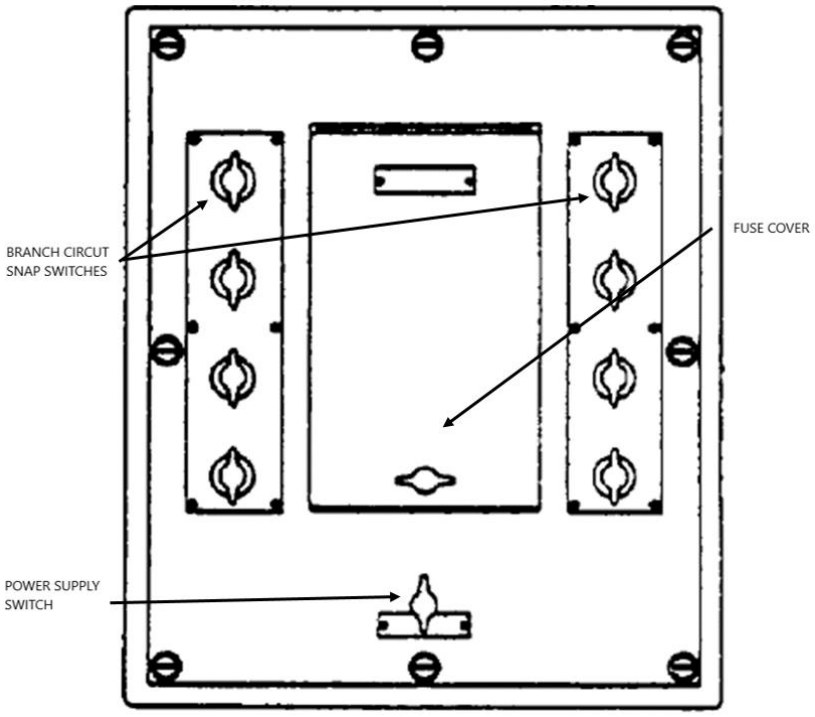



FIGURE 1. Panel, power supply and control for navigation lights, N.W.T., 3 phase bus, 8 circuits, symbol no. 940.1.

AMSC N/A FSC 6110

Distribution Statement A. Approved for public release: distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T19:47Z
Check the source to verify that this is the current version before use.

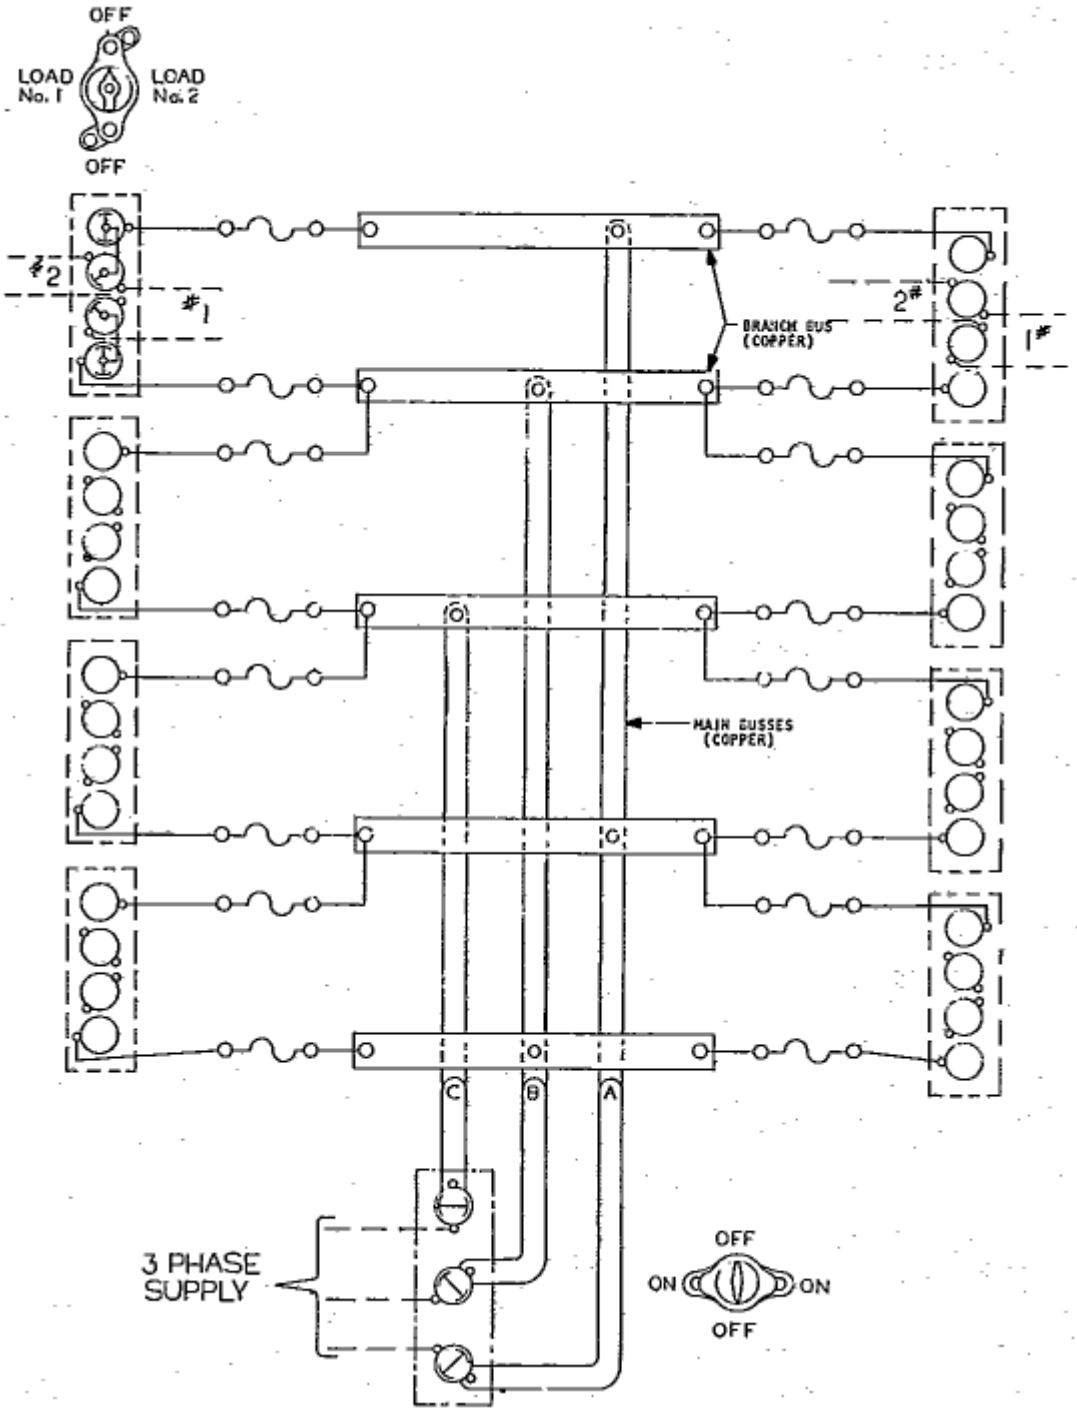



FIGURE 2. Symbol 940.1 circuit diagram.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T19:47Z
Check the source to verify that this is the current version before use.

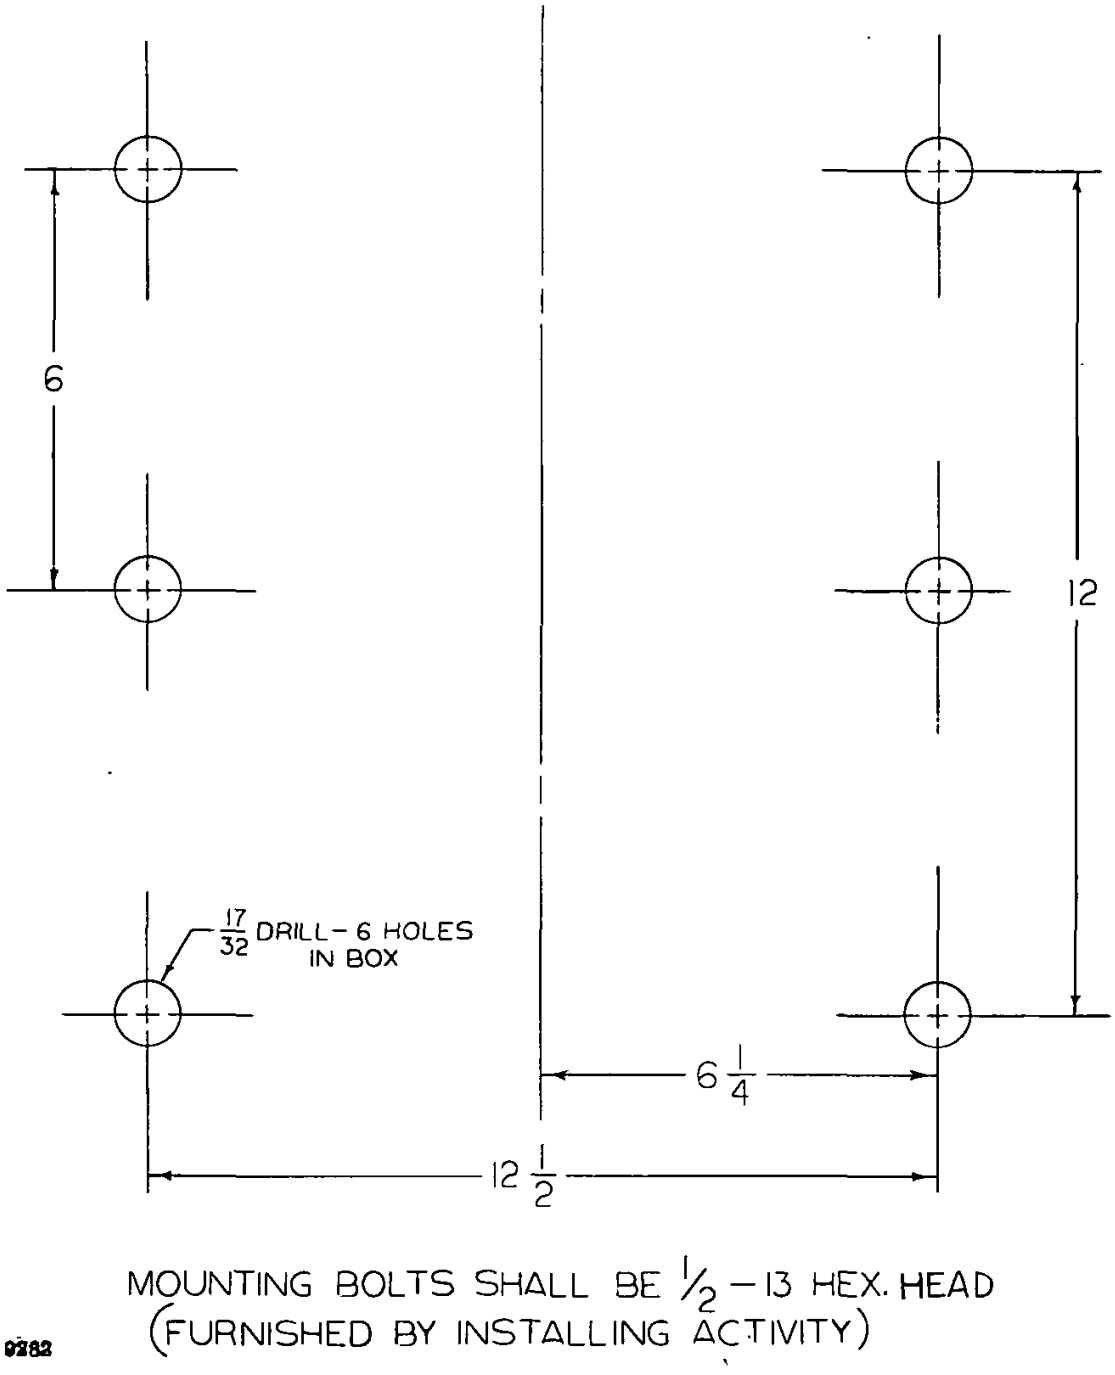



FIGURE 3. Mounting dimensions (inches).



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T19:47Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

| | |
|---|---|
| Enclosure: | Overall dimensions shall be approximately 16 inches high by 14 inches wide by 4 inches deep, non-watertight (NWT) construction. |
| Switches, fuses, busses, and connectors: | Switches, fuses, busses, and connectors shall be arranged and installed in the relative locations shown on figures 1 and 2. "OFF" position of switches shall be at the top. |
| Fuse clip blocks and connecting busses: | Fuse clip blocks shall be grouped together in a centralized location, and fuses shall be made accessible through a hinged cover in the main box cover as shown on figure 1. Fuse clip blocks and connecting busses shall be suitably mounted on insulating blocks as required for proper clearances and creepages between phases and ground. Fuse clip shall be PIN AA55507/01-04 of A-A-55507. |
| Switches: | Switches shall be base mounted and operated by handles in cover via self-aligning coupler arrangement. The bottom left-hand switch shall have a crank-type handle (for "man overboard" flashing operation). |
| Switch, power supply: | Power supply switch shall be rotary snap, triple-pole, single-throw, type 1SR3A4 of MIL-DTL-15291/3 (one required). |
| Switch, filament transfer: | Filament transfer switch shall be rotary snap, double-pole, double-throw, type 1SR2B4A of MIL-DTL-15291/3 (eight required). |
| Wiring: | Wiring shall be as shown on figure 2. Internal wiring, as required, shall be copper and selected in accordance with the hook-up wire section of MIL-DTL-917. Only the wiring between the bus bars and the switches is required to be furnished by the manufacturer. Output wiring from switches is part of the vessel's electrical distribution system and not covered by this specification. |

CHANGES FROM PREVIOUS ISSUE. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

CONCLUDING MATERIAL

Custodian:
Navy – SH

Preparing activity:
Navy – SH
(Project 6110-2025-014)

Review activity:
DLA – GS

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using ASSIST at https://assist.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T19:47Z
Check the source to verify that this is the current version before use.