METRIC
A-A-52559
February 27, 1996
SUPERSEDING
MIL-G-52346C(ME)
8 August 1988

COMMERCIAL ITEM DESCRIPTION

GUARD, ROADWAY CROSSING (METRIC)

The General Services Administration has authorized the use of this commercial item description (CID) for all federal agencies.

1. SCOPE. This CID covers a roadway crossing guard made of sheet steel to be used with a 102 millimeter (mm) (4 inch (in)), lightweight, collapsible hoseline system.

2. SALIENT CHARACTERISTICS.

2.1 Material. Unless otherwise specified (see 6.2), material shall be sheet steel in accordance with ASTM A366 or A569. Material not specified shall be selected by the contractor and shall be subject to all provisions of this specification.

2.1.1 Material deterioration prevention and control. The guard shall be fabricated from compatible materials, inherently corrosion resistant or treated to provide protection against the various forms of corrosion and deterioration that may be encountered in any of the applicable operating and storage environments.

2.1.2 Dissimilar metals. Dissimilar metals shall not be used in intimate contact with each other unless protected against galvanic corrosion.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any other data which may improve this document should be sent to: U.S. Army Tank-automotive and Armaments Command, ATTN: AMSTA-TR-E/BLUE, Warren, MI 48397-5000.

FSC 3835

DISTRIBUTION STATEMENT A. Approved for public release: distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:13Z
Check the source to verify that this is the current version before use.

21.2 Design and construction. Guards shall be as specified in figure l..

2.3 Treatment and painting. Unless otherwise specified in the contractor order (see 6.2), the guard shall be cleaned, treated and painted in accordance with the contractor's commercial practice.

2.4 Identificaiton and markings. Identification and markings of the guard shall be permanent and legible and shall include, as a minimum, the manufacturer's identification code (CAGE), the contract number, the part identification number (PIN) AA52559-1 (see 6.2), and the national stock number (NSN).

3. REGULATORY REQUIREMENTS.

3.1 Recovered material. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

4. QUALITY ASSURANCE PROVISIONS.

4.1 Responsibility for inspeciton. The contractor is responsible for the performance of all inspections (examinations and tests).

4.2 Contractor certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this CID and that the product conforms to the producer's own drawings, specifications, workmanship standards, and quality assurance practices. Items with known defects shall not be submitted for Government acceptance. The Government reserves the right to require proof of such conformance prior to the first delivery and thereafter as maybe otherwise provided for under the provisions of the contract.

5. PACKAGING.

5.1 Preservation, packing, and marking. Preservation, packing, and marking shall be as specified in the contractor order (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T09:13Z
Check the source to verify that this is the currenversion before use.

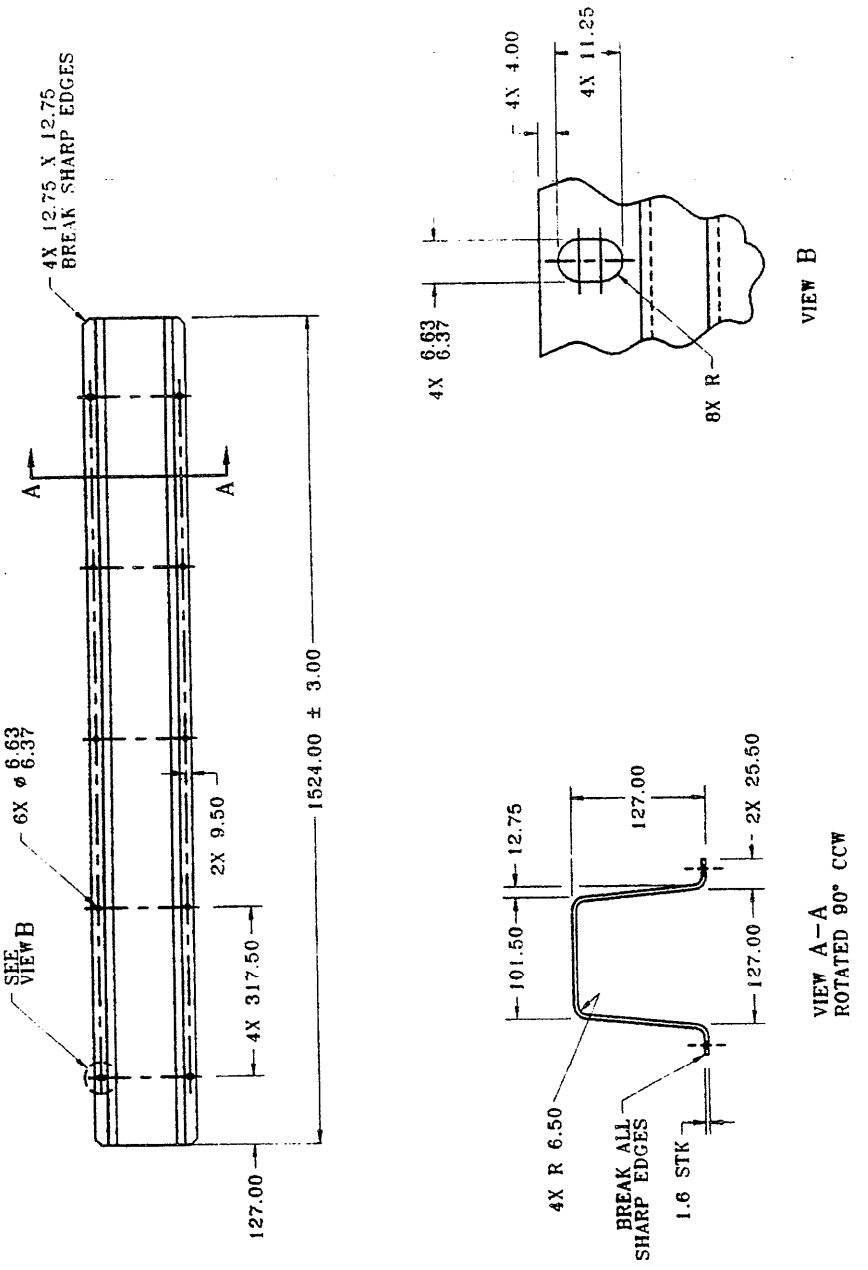

NOTE: All dimensions are in millimeters. Unless otherwise specified, tolerances are as follows:
one place (.X) nominal.
two places (.XX) ± 1.5 mm.

FIGURE 1. Roadway crossing guard.

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:13Z
Check the source to verify that this is the current version before use.

6. NOTES

(This section contains information of a general or explanatory nature that maybe helpful, but is not mandatory.)

6.1 Addresses for obtaining copies of referenced documents.

6.1.1 Government documents. Copies of A-A-52559, "Guard, Roadway Crossing (Metric)" are available from the Defense Printing Service Detachment Office, Bldg. 4D (Customer Service), 700 Robbins Avenue, Philadelphia, PA 19111-5094 and the "Code of Federal Regulations (CFR)" from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.

6.1.2 Non-Government documents. Copies of ASTM A366 "Standard Specification For Steel, Sheet, Carbon, Cold-Rolled, Commercial Quality" and ASTM A569 "Standard Specification For Steel, Carbon (0.15 Maximum, Percent) Hot-Rolled Sheet and Strip Commercial Quality" are available from American Society for Testing and Materials (ASTM), 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959.

6.2 Ordering data. Acquisition documents must specify the following:

a. Title, number, and date of this CID.
b. Issue of DODISS to be cited in the solicitation.
c. Material, if other than as specified or if to be specified by the contractor.
d. Treatment and painting, if other than as specified.
e. PIN and quantity of guards required.
f. Selection of applicable level and packaging requirements.

6.3 Cross-reference data. Guards conforming to this CID are interchangeable/substitutable with guards conforming to MIL-G-52346C(ME).

6.4 Thickness of guard. Thickness of the guard was increased to 1.6 mm (0.063 in) from 1.524 mm (0.060 in) to conform to metric size standards.

MILITARY INTERESTS:

Custodian:
Army - AT

Review activity:
DLA CS

CIVIL AGENCY COORDINATING ACTIVITY:
GSA - FSS

PREPARING ACTIVITY:
Army - AT

(Project 3835-0110)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:13Z
Check the source to verify that this is the current version before use.