INCH-POUND

A-A-52566A
May 3, 2002
SUPERSEDING
A-A-52566
May 23, 1997

COMMERCIAL ITEM DESCRIPTION
SINK, PHOTOGRAPHIC PROCESSING, TEMPERATURE-CONTROLLED

The General Services Administration has authorized the use of this Commercial Item Description (CID) for all federal agencies. The original issue of this CID replaced MIL-S-13565(ME).

1. SCOPE. This commercial item description covers photographic processing sinks (herein referred to as sink(s)).

2. CLASSIFICATION. The sinks shall conform to the following types and sizes.

2.1 Type I.

Size 1 - Accommodates three 9 by 14 inch (23 by 36 cm), outside dimension, straight-sided trays.

2.2 Type II.

Size 1 - Accommodates three 20 by 24 inch (51 by 61 cm) capacity trays.

Size 2 - Accommodates three 30 by 40 inch (76 by 102 cm) capacity trays.

Beneficial comments, recommendations, additions, deletions, clarifications etc., and any other data which may improve this document should be sent to: ENGINEER RESEARCH AND DEVELOPMENT CENTER, CORPS OF ENGINEERS, U.S. ARMY TOPOGRAPHIC ENGINEERING CENTER, ATTN CEERD-TS, 7701 TELEGRAPH ROAD, ALEXANDRIA, VA 22315-3864.

AMSC N/A FSC 6740

Distribution Statement A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:13Z
Check the source to verify that this is the current version before use.

3. SALIENT CHARACTERISTICS.

3.1 Description. The sinks are intended for use in truck-mounted and base-installation photographic laboratories. Type I and type II, size 1 sinks are to be used in truck-mounted darkrooms; type II sizes 1 and 2 are to be used in base-installations.

3.2 Materials. The contractor shall select the materials, but the materials shall be capable of meeting all of the operational and environmental requirements specified herein. Recovered materials shall be used to the maximum extent possible

.

3.3 Performance Characteristics.

3.3.1 Sink. The sinks shall consist of a base-mounted, insulated trough and a water-circulation system with a temperature control unit (see figure 1). The base of the sinks shall provide access to the temperature control unit(s). A means of leveling the sink shall be provided. The type I sinks shall withstand a sustained, evenly distributed weight of 500 lb (227 kg); the type II sinks, a sustained, evenly distributed weight of 1000 pounds (454 kg). All sinks shall withstand a lateral force of 100 lb (45 kg) applied in any direction without permanent deformation or damage.

3.3.2 Trough. The trough shall form a basin to contain a constant temperature, circulating water bath and shall be provided with a drain. The inlet and outlet for the water-circulating system shall be provided with strainers and located to ensure maximum circulation and uniform temperature of the water throughout the basin. An overflow outlet shall prevent the water in the basin from reaching a depth greater than 2.50 in. (6 cm).

3.3.3 Temperature-control unit. The temperature-control unit shall consist of an electric water-heating element, a refrigeration unit, and the necessary thermostatic controls to regulate the temperature of the water. The controls shall maintain the water temperature at 68° F (20° C) ± 1.0° F, throughout an ambient temperature range of 45° F (7° C) to 110° F (43° C).

3.3.3.1 Condenser. Unless otherwise specified (see 6.1), the refrigeration unit condenser shall be cooled by an air-circulating fan. The condenser outlet shall have an attachment for the exhaust air ducts at the rear of the unit (see figure 2).

3.3.3.2 Heating element. The trough water shall be heated by an immersion-type, electric, heating element. The element(s) shall be capable of heating the liquid in the trays from 45° (7° C) F to 68° F (20° C) in one hour or less.

3.3.3.3 Cooling capacity. The refrigeration unit for the sink shall be capable of cooling the liquid in the trays from 80° F (27° C) to 68° F (20° C), in an ambient temperature of 110° F (43° C). The time required to reduce and stabilize the temperature shall not be greater than 1 hour for the type I, size 1 sink; not greater than 2 hours for the type II, size 1 sink; and not greater than 3 hours for the type II, size 2 sink.

3.3.4 Storage cabinet. Each type II sink shall include a storage cabinet in the base. The storage area of the cabinet shall be temperature controlled to maintain a constant 68° F (20° C) ± 1.0° F The door shall open to expose the full height and width of the cabinet and shall have a durable, resilient, air tight seal.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:13Z
Check the source to verify that this is the current version before use.

3.3.4.1 Rack. The cabinet shall contain a rigid, rack constructed to retain and support the required number of solution bottles. The size 1 sink shall have a capacity for not less than six 1.00 gallon (3.785 liter) solution bottles; the size 2, not less than eight. The bottles are 5.66 in. (14.38 cm) in diameter and 13.56 in. (34.44 cm) in height. The rack shall slide out for unobstructed access to the bottles and shall permit their easy insertion and removal.

3.3.4.2 Drip pan. The cabinet shall be provided with a drip pan or other means to remove condensation.

3.3.5 Control switch.

3.3.5.1 Type I. Type I sinks shall be provided with a two-position switch marked “ON” and “OFF” to operate the temperature control functions.

3.3.5.2 Type II. Type II sinks shall have a three-position switch , previously marked “OFF”, “CABINET” and “SINK”. When the switch is set in the “CABINET” position, the temperature control functions of the storage cabinet shall operate. When the switch is set in the “SINK” position, the temperature control functions for the bath and storage cabinet, and the water circulation system shall operate.

3.3.6 Electrical requirements. The electrical components of the sinks shall operate on a 120 vac, 60 Hz, single phase power source or a 208 vac, 50/60 Hz, 3 phase, 4 wire system.

3.3.7 Installation Requirements. All fixtures, connections, and plumbing exterior to the base shall be contained within the envelope defined by the exterior limits of the trough.

3.3.7.1 Type I sinks. Floor space requirements for type I, size 1 sinks shall not be greater than 36.00 in. (91 cm) by 34.00 in. (86 cm). The working height shall be 34.00 in. (86 cm) to 38.00 in. (97 cm).

3.3.7.2 Type II sinks. Floor space requirements for the type II, size 1 sinks shall not be greater than 81.00 in. (206 cm) by 34.00 in. (86 cm); for type II, size 2 sinks, not greater than 113.00 in. (287 cm) by 52.00 in. (132 cm). The working height of both type II sinks shall be 36.00 in. (91 cm) to 38.00 in. (97 cm).

3.3.8 Lubrication. All moving parts shall be provided with suitable means of lubrication.

3.3.9 Treatment and painting. Unless otherwise specified (see 6.1), or unless the material is inherently corrosion resistant, the table shall be treated and painted for corrosion protection using the contractor’s standard practice.

3.3.10 Fungus and moisture resistance. Materials used in the construction of this table shall resist mildew, rot, fungus and moisture encountered in tropical climates.

3.3.11 Interchangeability. All parts having the same part number shall be functionally and dimensionally interchangeable (see 6.4.1).

3.3.12 Metric products. Products manufactured to metric dimensions will be considered on an

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:13Z
Check the source to verify that this is the current version before use.

equal basis with those manufactured using inch-pound units, provided they fall within the tolerances specified and all other requirements of this Commercial Item Description are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch/pound units, a request should be made to the contracting officer to determine if the product is acceptable. The contracting officer has the option of accepting or rejecting the product.

3.3.13 Transportability. When mounted in a vehicle, both type I and type II sinks shall withstand the shock and vibration of road travel, including off-the-road (rough terrain) conditions when mounted in a vehicle. When specified (see 6.1), the contractor shall devise a road test, subject to the approval of the contracting officer, to determine the adequacy of the unit's transportability.

3.3.14 Ease of maintenance. Components requiring adjustment, maintenance, repair, or replacement shall be readily accessible, without requiring removal of major components or assemblies.

3.3.15 Service manuals. When specified (see 6.1), the contractor shall provide service manuals and repair lists for the sink.

4. QUALITY ASSURANCE PROVISIONS.

4.1 Product Conformance. The products provided shall meet the salient characteristics of this Commercial Item Description, conform to the producer's own drawings, specifications, standards and quality assurance practices, and are the same sinks offered for sale in the commercial marketplace. The Government reserves the right to require proof of such conformance.

4.2 Market acceptability. The sink offered shall be the latest model of the standard product of the supplier and shall have been used in the field for at least one year by the commercial organizations.

4.3 Examinations. Each sink examined, shall be examined for compliance with the requirements specified in 3.3. Each element of inspection shall encompass all visual and functional examinations. Nonconformance to any specified requirement or the presence of one or more defects, lessening required efficiency, shall constitute cause for rejection. Any redesign or modification following failure to meet the specified requirements shall receive particular attention for adequacy and suitability.

5. PACKAGING.

5.1 Preservation, packing, and marking shall be as specified in the contract or order.

6. NOTES.

6.1 Ordering data. Procurement documents should specify the following:

a. Title, number and date of this specification.
b. Type of sink required (see section 2).
c. When the condenser shall be other than air cooled (see 3.3.3.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:13Z
Check the source to verify that this is the current version before use.

d Whether the sinks shall operate on 120 vac, 60 Hz or 208 vac, 50/60 Hz (see 3.3.6).
e. When treatment and painting shall be other than the standard practice (see 3.3.9).
f. When a road test is required (see 3.3.13).
g. When service manuals and repair lists are required (see 3.3.15).

6.2 Part Identification Number (PIN). The following part identification numbering procedure is for government purposes and does not constitute a requirement for the contractor.

This example describes a part numbering system for CID A-A-52566

AA52566-2-1

Size 1
Size 2 (type 2 only)
Type I
Type II

6.3 Figures. The figures show limiting dimensions for Type II sinks, and depict a configuration that has been found acceptable. However, they are illustrative only and not intended to preclude the furnishing of another sink that conforms to the requirements of this specification.

6.4 Definition. For the purposes of this CID, the following definition applies.

6.4.1 Interchangeable parts. Interchangeable parts are defined as two or more parts possessing such functional and physical characteristics as to be equivalent in performance and durability. These parts are capable of being exchanged one for the other without alteration of the parts; of mating or adjoining parts, except for adjustment; and without selection for fit or performance.

6.5 National Stock Numbers (NSN). NSN 6740-00-291-9391 has been used in the past.

6.6 Subject term (key words) listing.

Water-circulation
Constant-temperature
Heating
Cooling
Trough
Cabinet

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:13Z
Check the source to verify that this is the current version before use.

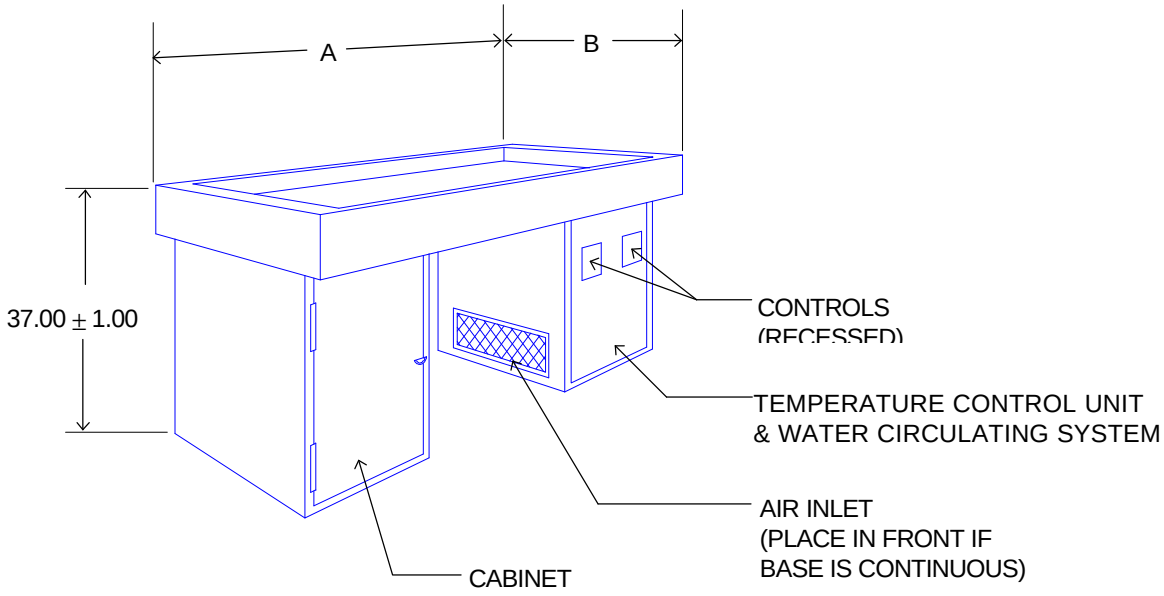

NOTE :

DIMENSIONS ARE IN INCHES.

SIZE	OVERALL DIMENSIONS		INSIDE TROUGH DIMENSIONS (No internal obstructions)		
	A	B	LENGTH	WIDTH	DEPTH
1	80.00 +0.00 -1.00	33.50 ±1.50	76.50 ±.50	30.00 +0.00 -2.00	5.00 ±1.50
2	110.00 ±3.00	50.00 ±2.00	106.00 ±2.00	46.00 ±1.00	5.00 ±1.50

Figure 1. Type II, Temperature Controlled Photographic Sinks.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:13Z
Check the source to verify that this is the current version before use.

REAR VIEW OF TYPE II, SIZE 1 SINK

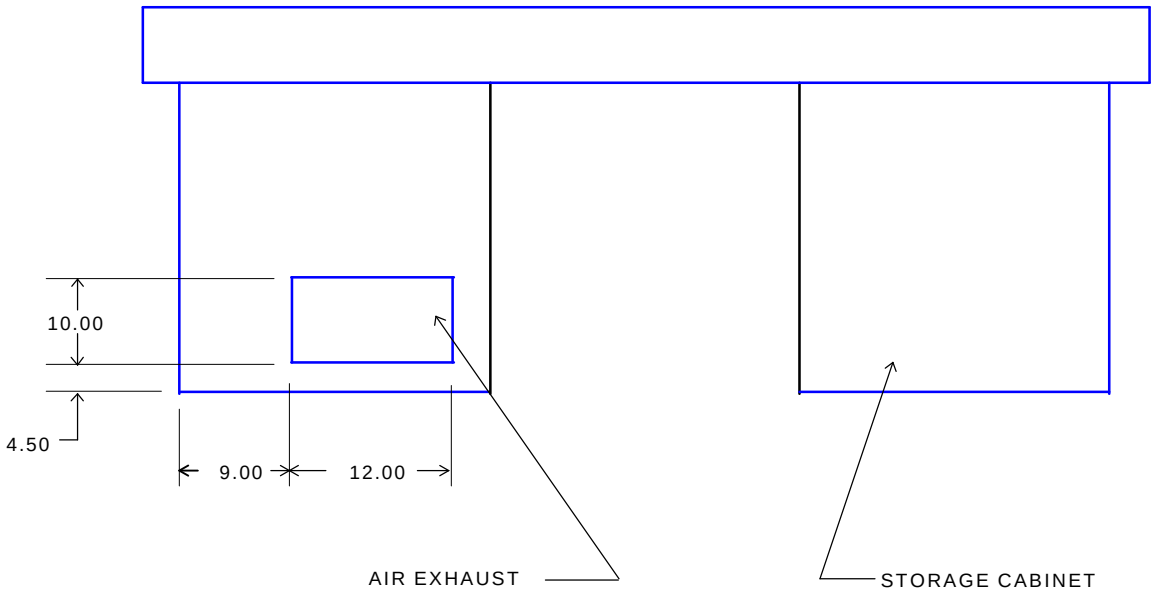

NOTE :

DIMENSIONS ARE IN INCHES
TOLERANCES ± .12

Figure 2. Condenser exhaust port location (for truck mounting).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:13Z
Check the source to verify that this is the current version before use.

Custodian:
Army – CE3

Preparing Activity:
Army – CE3
Project: 6740-0150

Civil Review Activity:
GSA-FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:13Z
Check the source to verify that this is the current version before use.