INCH-POUND

A-A-52568

August 29, 1997

COMMERCIAL ITEM DESCRIPTION

TABLE, LITHOGRAPHIC LAYOUT: TILT TOP, ILLUMINATED

The General Services Administration has authorized the use of this Commercial Item Description (CID) as a replacement for MIL-T-11776, for all federal agencies.

1. SCOPE

1.1 Scope. This CID covers a lithographic layout table suitable for preparing and inspecting photographic and translucent material used in lithographic processes.

2. SALIENT CHARACTERISTICS

2.1. Description. The table shall consist of a base frame with a seat and a side storage tray, an adjustable table top frame with a glass working surface, an internal light source, and a moveable parallel ruling straightedge. See Figure 1 for reference only.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may improve this document should be sent to: U.S. ARMY TOPOGRAPHIC ENGINEERING CENTER, ATTN: CETEC-PD-TE, 7701 TELEGRAPH ROAD, ALEXANDRIA, VA 22315-3864.

AMSC N/A FSC 3610

Distribution Statement A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:13Z
Check the source to verify that this is the current version before use.

2.2. Dimensions. The lithographic layout table shall be of nominal dimensions as shown in table I.

TABLE I. Nominal table dimensions (in inches).

Length	40.00
Height	37.00
Width	30.00
Working surface	24.00 × 30.00

2.3. Base frame. The base frame shall be of material and construction capable of supporting the table and all of its components. When assembled, the base frame shall be rigid and a means of securing each leg of the base frame to a supporting surface or floor shall be provided. The pattern for floor mounting shall be as shown in Figure 2.

2.4. Table top frame. The table top frame shall be of material and construction capable of providing rigid support for the glass working surface, light diffusing glass, lamp housing, and straightedge. The table top frame shall be hinged to the front edge of the base frame to allow forward tilting of the working surface. Adjustable locking devices shall lock the working surface at any desired tilt angle from horizontal to not less than 20°. The table top frame shall be supplied with material suitable for insulating both the glass working surface and the light diffusing glass.

2.4.1. Glass working surface. The glass working surface shall be plate or float glass or other suitable material and shall be coplanar with the table top frame. The underside of the glass working surface shall be frosted. Unless otherwise specified (see 6.2), the method used for the frost-finish is at the contractor's option. Two frosted, ground-glass working surfaces shall be supplied, one being a spare.

2.4.2. Light diffusing glass. A light diffuser shall be placed in the area between the lamps and the glass working surface for light diffusion. Opal glass may be used.

2.5. Seat. The seat shall be temporarily or permanently attached to the base frame (see Figure 1). The seat base shall be of material and construction comparable to the base frame and shall have a means of adjusting the seat to a height allowing for comfortable use of the table and all its components.

2.6. Side tray. The side tray with individual supporting brackets shall be of material and construction comparable to the base frame. Holes shall be provided in the base frame to install the side tray and its supporting bracketry to either side of the table.

2.7. Illumination. The light source shall provide uniform illumination across the entire glass working surface. Access shall be provided for removing and installing the lamps. A means for dissipating heat from the lamps and the glass working surface shall be provided. A control switch shall be mounted on the housing unit convenient for right-hand operation and a means for varying light intensity shall be provided.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:13Z
Check the source to verify that this is the current version before use.

2.8. Parallel ruling straightedge. The parallel ruling straightedge shall extend the full width of the table top frame and movement shall be parallel to the width of the glass working surface. The ends and working edges of the straightedge shall be squared (90°) for the full thickness. A means for locking and securing both ends of the straightedge at any parallel setting within the glass working surface shall be provided.

2.9. Electrical equipment and wiring. All electrical equipment and wiring shall conform to NFPA No. 70, National Electrical Code.

2.10. Strength. When secured and stationed, the table shall support a deadweight of 500 pounds (lb) and simultaneously withstand a lateral force of 100 lb applied perpendicular to the top of each of the four sides separately, without permanent deformation.

2.11. Lubrication. All moving parts shall be lubricated.

2.12. Human factors engineering. Emphasis shall be given to general practices in human factors engineering with respect to controls, workspace design, and hazards and safety, as applicable.

2.13. Identification marking. Each equipment module shall be identified by manufacturer's name and part number, serial number, and contract number. A method of identifying required modules that constitute a complete system shall also be provided.

2.14. Treatment and painting. Unless otherwise specified (see 6.2), treatment and painting shall be in accordance with accepted industry practice.

2.15. Identification of materials and finishes. The contractor shall identify and document the specific material and material finish or treatment of all components and sub-components.

2.16. Fungus and moisture resistance. Materials used in the construction of this table shall resist mildew, rod, fungus, and moisture encountered in tropical climates.

2.17. Interchangeability. All parts having the same part number shall be functionally and dimensionally interchangeable.

2.18. Color. Unless otherwise specified (see 6.2), the manufacturer’s standard color shall be acceptable.

3. REGULATORY REQUIREMENTS

3.1. Recovered material. The offerer/contractor is encouraged to use recovered materials (see 6.6.1) to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

4. QUALITY ASSURANCE PROVISIONS

4.1. Product conformance. The products provided shall meet the salient characteristics of this CID, conform to the producer’s own drawings, specifications, standards, and quality assurance

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:13Z
Check the source to verify that this is the current version before use.

practices, and be the same product offered for sale in the commercial marketplace. The government reserves the right to require proof of such conformance.

4.2. Market acceptability. The products offered shall be of the latest model of the standard product of the supplier, and shall have been used for at least one year by commercial organizations.

4.3. Examinations. Each table shall be examined for compliance with the requirements specified in 2.1 through 2.17. Any modification necessary following failure to meet the specified requirements shall receive particular attention for adequacy and suitability. This element of inspection shall encompass all examinations of performance and dimensional requirements. Non-compliance to any specified requirement or the presence of one or more defects lessening required efficiency shall constitute cause for rejection.

5. PACKAGING

5.1. Preservation, packing, and marking shall be as specified in the contract or order.

6. NOTES

6.1. When this CID is used for procurement, the product conformance clause should appear in the solicitation.

6.2. Ordering data. Procurement documents should specify the following:

a. Title, number, and date of this CID.
b. When the method used for glass frost-finish will not be at the option of the contractor (see 2.4.1).
c. When treatment and painting will be other than in accordance with accepted industry practice (see 2.14).
d. Color required (see 2.18).
e. Level of preservation and packing required.

6.3. Data requirements. The contracting officer should include, in the contract or order, any data requirements, such as maintenance and operation manuals, instructional materials and technical publications to be furnished with each table.

6.4. Provisioning. The contracting officer should include in the contract or order, provisioning requirements for repair parts, necessary maintenance tools (including any special tools), and instructions regarding shipment of the table.

6.5. Source of documents.

6.5.1. Copies of ASTM requirement documents are available from the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.

6.5.2. Ordering information for UL publications is available from the Underwriters Laboratories, Inc., Publications Stock, 333 Pfingsten Road, Northbrook, IL 60062.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:13Z
Check the source to verify that this is the current version before use.

6.5.3. The National Electrical Code, NFPA No. 70, is available from the National Fire Protection Association, 60 Batterymarch Park, Quincy, MA 02269.

6.6. Definitions. For the purposes of this CID, the following definitions apply.

6.6.1. Recovered materials. Recovered materials are those that have been collected from solid waste and reprocessed to become a source of raw materials, as distinguished from virgin raw materials.

6.6.2. Glass. For the purpose of this requirement, glass is any hard, more or less transparent substance.

6.6.3. Interchangeable parts. Interchangeable parts are defined as two or more parts possessing such functional and physical characteristics as to be equivalent in performance and durability. These parts are capable of being exchanged one for the other without alteration of the parts; of mating or adjoining parts, except for adjustment; and without selection for fit or performance.

6.7. Subject term (key words) listing.

Glass top
Cartographic
Photographic

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:13Z
Check the source to verify that this is the current version before use.

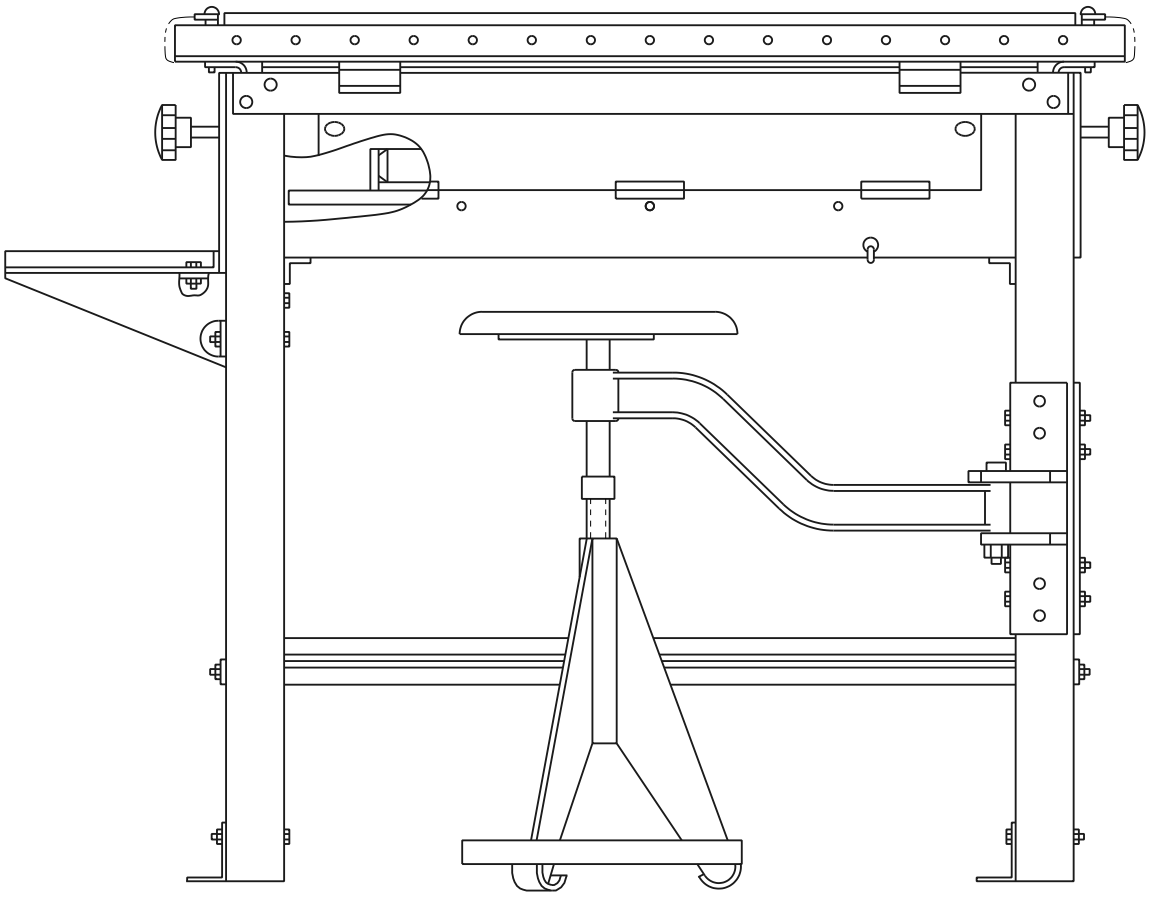


Figure 1. Table – Reference only

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:13Z
Check the source to verify that this is the current version before use.

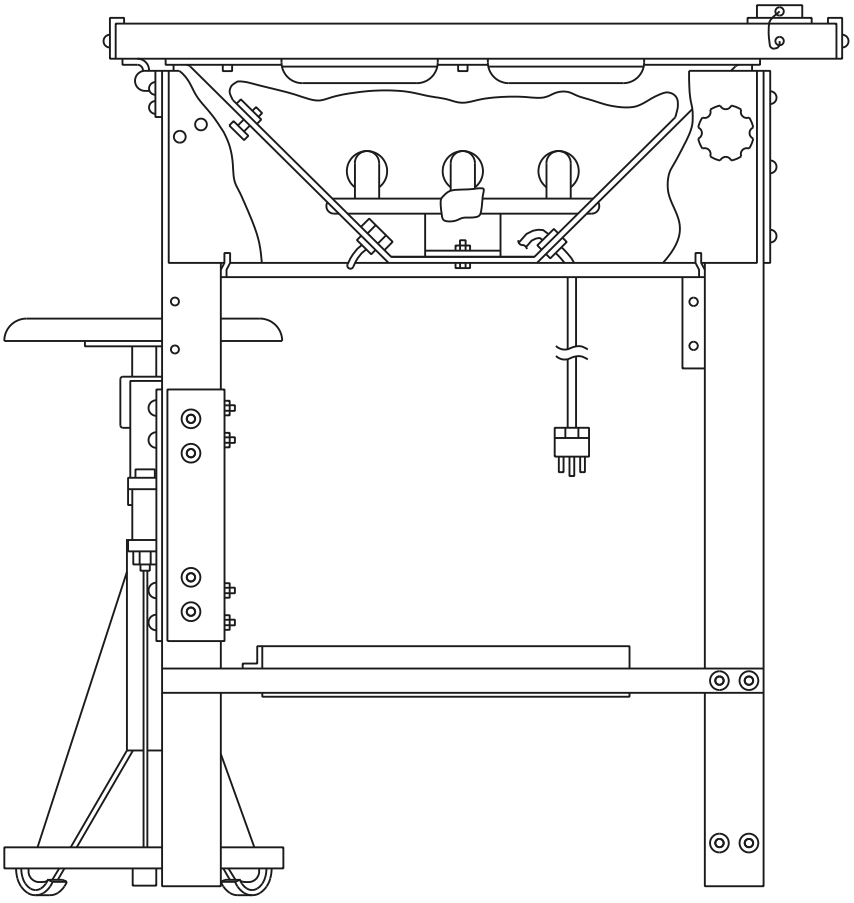


Figure 1. Table – Reference only – Cont..

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:13Z
Check the source to verify that this is the current version before use.

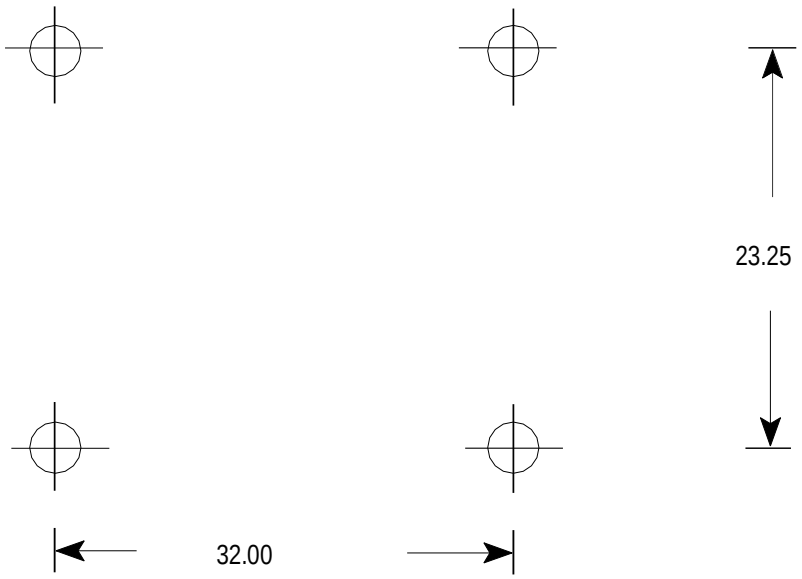


Figure 2. Floor mounting bolt pattern.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:13Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CE3

Preparing activity:
Army - CE3
(Project 3610-0412)

Review activity:
DLA - GS

Civilian Coordinating Agency:
GSA - FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:13Z
Check the source to verify that this is the current version before use.