INCH-POUND

A-A-52568A
May 3, 2002
SUPERCEDING
A-A-52568
August 29, 1997

COMMERCIAL ITEM DESCRIPTION

TABLE, LITHOGRAPHIC LAYOUT: TILT TOP, ILLUMINATED

The General Services Administration has authorized the use of this Commercial Item Description (CID) for all federal agencies. The original issue of this CID replaced MIL-T-11776.

1. SCOPE. This CID covers a lithographic layout table (herein referred to as table(s)).

2. SALIENT CHARACTERISTICS

2.1 Description. This CID covers a lithographic layout table suitable for preparing and inspecting photographic and translucent material used in lithographic processes.

2.2 Materials. The contractor shall select the materials, but the materials shall be capable of meeting all of the operational and environmental requirements specified herein. Recovered materials shall be used to the maximum extent possible.

2.3 Performance Characteristics.

2.3.1 Table. The table shall consist of a base frame with a seat and a side storage tray, an adjustable table top frame with a glass working surface, and internal light source, and a moveable parallel ruling straightedge. See Figure 1 reference only.

Beneficial comments, recommendations, additions, deletions, clarifications etc., and any other data which may improve this document should be sent to: ENGINEER RESEARCH AND DEVELOPMENT CENTER, CORPS OF ENGINEERS, U.S. ARMY TOPOGRAPHIC ENGINEERING CENTER, ATTN CEERD-TS, 7701 TELEGRAPH ROAD, ALEXANDRIA, VA 22315-3864.

AMSC N/A FSC 3610

Distribution Statement A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:13Z
Check the source to verify that this is the current version before use.

2.3.2 Dimensions. The lithographic layout table shall be of nominal dimensions as shown in table I.

TABLE I. Nominal table dimensions (in inches).

Length	40.00
Height	37.00
Width	30.00
Working Surface	24.00 x 30.00

2.3.3 Base frame. The base frame shall be of material and construction capable of supporting the table and all of its components. The base frame shall provide a means of securing each leg of the base frame to the floor. The pattern for floor mounting shall be as shown in figure 2.

2.3.4 Tabletop frame. The tabletop frame shall provide support for the glass working surface, light diffusing glass, lamp housing, and straightedge. The tabletop frame shall allow forward tilting of the working surface to any desired tilt angle from horizontal to not less than 20°. The table top frame shall be supplied with material suitable for insulating both the glass working surface and the light diffusing glass.

2.3.4.1 Glass working surface. The glass working surface shall be plate or float glass or other suitable material and shall be coplanar with the table top frame. The underside of the glass working surface shall be frosted. Unless otherwise specified (see 5.2), the method used for the frost-finish is at the contractor's option. Two frosted, ground-glass working surfaces shall be supplied, one being a spare.

2.3.4.2 Light diffusing glass. A light diffuser shall be placed in the area between the lamps and the glass working surface for light diffusion. Opal glass may be used.

2.3.5 Seat. The seat shall be temporarily or permanently attached to the base frame (see Figure 1). The seat base shall be of material and construction comparable to the base frame and shall have a means of adjusting the seat to a height allowing for comfortable use of the table and all its components.

2.3.6 Side tray. The side tray shall mount to either side of the table.

2.3.7 Illumination. The light source shall provide uniform illumination across the entire glass working surface. Access shall be provided for removing and installing the lamps. A means for dissipating heat from the lamps and the glass working surface shall be provided. A control switch shall be mounted on the housing unit convenient for right-hand operation and a means for varying light intensity shall be provided.

2.3.8 Electrical requirements. The table shall operate on 120 vac, 60 Hz, single-phase, electrical service and shall have a power cable not less than 5 feet long.

2.3.9 Parallel ruling straightedge. The parallel ruling straightedge shall extend the full width of the table top frame and movement shall be parallel to the width of the glass working surface. The

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:13Z
Check the source to verify that this is the current version before use.

ends and working edges of the straightedge shall be squared (90°) for the full thickness. A means for locking and securing both ends of the straightedge at any parallel setting within the glass working surface shall be provided.

2.3.10 Strength. When secured and stationed, the table shall support a deadweight of 50 pounds (lb) and simultaneously withstand a lateral force of 100 lb applied perpendicular to the top of each of the four sides separately, without permanent deformation.

2.3.11 Lubrication. All moving parts shall be provided with suitable means of lubrication.

2.3.12 Treatment and painting. Unless otherwise specified (see 5.2), or unless the material is inherently corrosion resistant, the table shall be treated and painted for corrosion protection using the contractor's standard practice.

2.3.13 Fungus and moisture resistance. Materials used in the construction of this table shall resist mildew, rot, fungus and moisture encountered in tropical climates.

2.3.14 Interchangeability. All parts having the same part number shall be functionally and dimensionally interchangeable (see 5.4.1).

2.3.15 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within the tolerances specified and all other requirements of this Commercial Item Description are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch/pound units, a request should be made to the contracting officer to determine if the product is acceptable. The contracting officer has the option of accepting or rejecting the product.

2.3.16 Ease of maintenance. Components requiring adjustment, maintenance, repair, or replacement shall be readily accessible, without requiring removal of major components or assemblies.

3. QUALITY ASSURANCE PROVISIONS

3.1 Product Conformance. The products provided shall meet the salient characteristics of this Commercial Item Description, conform to the producer's own drawings, specifications, standards and quality assurance practices, and are the same sinks offered for sale in the commercial marketplace. The Government reserves the right to require proof of such conformance.

3.2 Market acceptability. The table offered shall be the latest model of the standard product of the supplier and shall have been used in the field for at least one year by the commercial organizations.

3.3 Examinations. Each table examined, shall be examined for compliance with the requirements specified in 3.3. Each element of inspection shall encompass all visual and functional examinations. Nonconformance to any specified requirement or the presence of one or more defects, lessening required efficiency, shall constitute cause for rejection. Any redesign or modification following failure to meet the specified requirements shall receive particular attention for adequacy and suitability.

4. PACKAGING

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:13Z
Check the source to verify that this is the current version before use.

4.1 Preservation, packing, and marking shall be specified in the contract or order.

5. NOTES

5.1 When this CID is used for procurement, the product conformance clause should appear in the solicitation.

5.2 Ordering data. Procurement documents should specify the following:

a. Title, number, and date of this CID.
b. When the method used for frost-finish will not be at the option of the contractor (see 2.3.4.1).
c. When treatment and painting will be other than the standard practice (see 3.3.12).
d. Level of preservation and packing required (see 4.1).

5.3 Figures. The figure 1 depicts a configuration that has been found acceptable and is for illustrative purposes only. Figure 2 depicts the bolt pattern used to secure the table to the floor. However, they are illustrative only and not intended to preclude the furnishing of another table that conforms to the requirements of this specification.

5.4 Definitions. For the purposes of this CID, the following definitions apply.

5.4.1 Interchangeable parts. Interchangeable parts are defined as two or more parts possessing such functional and physical characteristics as to be equivalent in performance and durability. These parts are capable of being exchanged one for the other without alteration of the parts; of mating or adjoining parts, except for adjustment; and without selection for fit or performance.

5.4.2 Glass. For the purpose of this requirement, glass is any hard, more or less transparent substance.

5.5 National Stock Numbers (NSN). NSN 3610-00-289-7234 has been used in the past.

5.6 Subject term (key words) listing.

Glass top
Cartographic
Photographic

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:13Z
Check the source to verify that this is the current version before use.

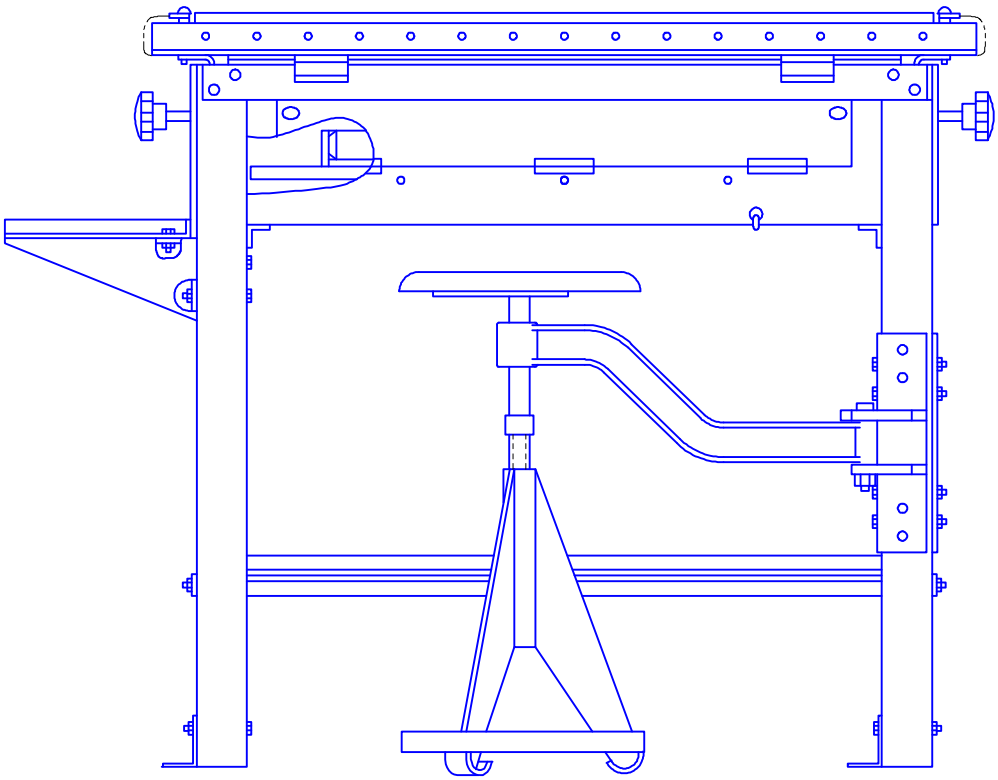


Figure 1. Table – Reference only

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:13Z
Check the source to verify that this is the current version before use.

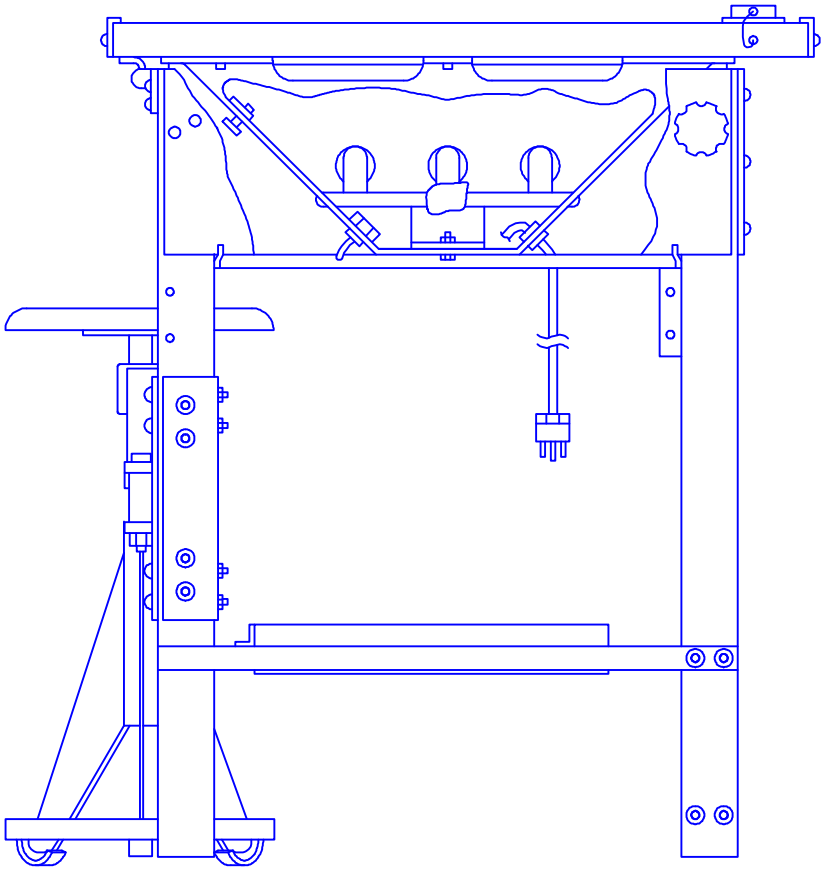


Figure 1. Table – Reference only – Cont.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:13Z
Check the source to verify that this is the current version before use.

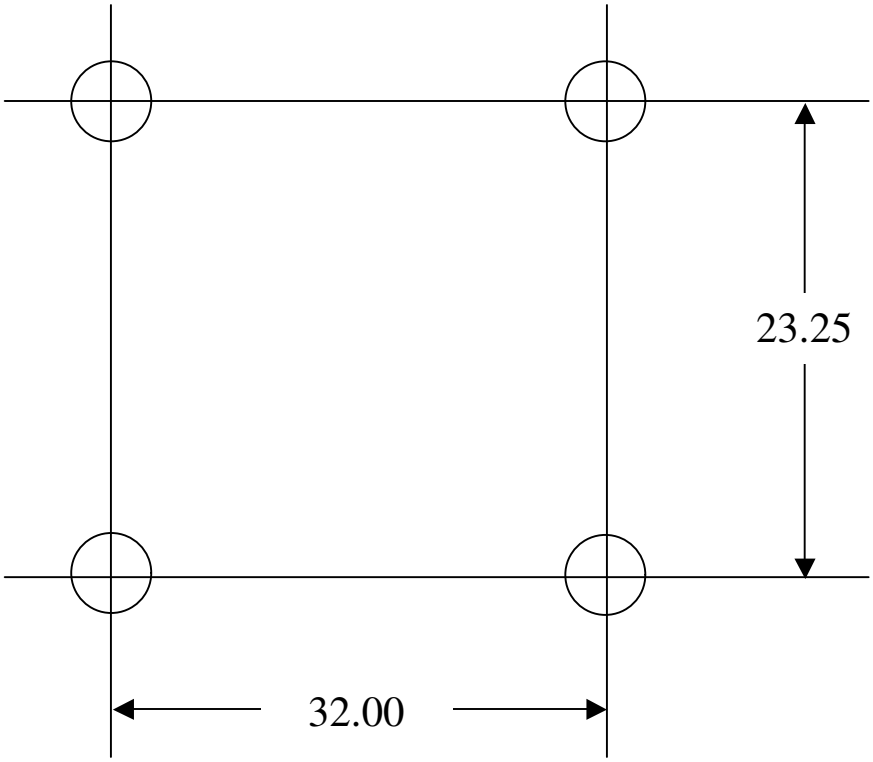


Figure 2. Floor mounting bolt pattern (in inches)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:13Z
Check the source to verify that this is the current version before use.

Custodian:
Army – CE3

Preparing activity:
Army – CE3
(Project 3610-0427)

Review activity:
DLA -GS

Civilian Coordinating Activity:
GSA-FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:13Z
Check the source to verify that this is the current version before use.