METRIC

A-A-52569A
May 3, 2002
SUPERCEDING
A-A-52569
October 24, 1997

COMMERCIAL ITEM DESCRIPTION

SINK, PHOTOGRAPHIC PROCESSING AND SINK, LITHOGRAPHIC PROCESSING

The General Services Administration has authorized the use of this Commercial Item Description (CID) for all federal agencies. The original issue of this CID replaced MIL-S-12781.

1. SCOPE. This CID covers a photographic print processing sink and a lithographic plate processing sink (hereafter referred to as sink(s)).

2. CLASSIFICATION. The sinks shall conform to the following types.

2.1. Type I. – Sink, Photographic Processing, 914.4 x 1168.4 mm (36 x 46 inches).

2.2. Type II. – Sink, Lithographic Processing, 812.8 x 914.4 mm (32 x 36 inches).

3. SALIENT CHARACTERISTICS

3.1 Description. Type I sinks are used for developing large photographic materials. Type II sinks are used for processing offset lithographic press plates. Both types are used in mobile, truck or van mounted, field sections and base-installation laboratories.

3.2 Materials. The contractor shall select the materials, but the materials shall be capable of meeting all of the operational and environmental requirements specified herein. Recovered materials shall be used to the maximum extent possible (see 6.4.1).

3.3 Performance Characteristics.

3.3.1 Sink. The sinks shall consist of a trough mounted on a base. The sink shall support 453.6 kg (1,000 pounds) vertically and shall withstand a lateral force of 45.4 kg (100 pounds) applied in any direction without permanent deformation or damage. The top edge of the sink (exclusive of the back splash panel, if any) shall be 939.8 mm ± 25.4 mm (37 inches, ± 1 inch) above the floor. Inside dimensions shall be exclusive of the dump gutter (if any). The maximum outside envelope of the sinks shall be as follows:

Beneficial comments, recommendations, additions, deletions, clarifications etc., and any other data which may improve this document should be sent to: ENGINEER RESEARCH AND DEVELOPMENT CENTER, CORPS OF ENGINEERS, U.S. ARMY TOPOGRAPHIC ENGINEERING CENTER, ATTN CEERD-TS, 7701 TELEGRAPH ROAD, ALEXANDRIA, VA 22315-3864.

AMSC N/A FSC 3610

Distribution Statement A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:13Z
Check the source to verify that this is the current version before use.

Type I. – 1016 x 1270 mm (40 x 50 inches).
Type II. – 914.4 x 1016 mm (36 x 40 inches).

3.3.2 Trough. The sink trough shall be made of corrosion-resistant materials and shall be provided with a drain. The drain shall be located on the right side of the sink as viewed from the front and shall be provided with a drain plug or stopper. An overflow outlet shall prevent the liquid in the trough from reaching a depth greater than 101.6 mm (4 inches). The underside of the trough shall be treated to prevent sweating.

3.3.3 Base frame. The base frame shall be made from corrosion-resistant material and shall be easily assembled or disassembled for shipment and storage with common hand tools.

3.3.3.1 Shelf. A removable shelf shall be provided 228.6 mm, ± 25.4 mm (9 inches, ± 1 inch), above the floor. The shelf shall support a uniform load of not less than 226.8 kg (500 pounds).

3.3.4 Type I. An example of Type I sink is shown in Figure 1 (see 6.3). Foot plates in accordance with Figure 3 shall be permanently attached to the bottom of each leg.

3.3.5 Type II. An example of a Type II sink is shown in Figure 2 (see 6.3). Foot plates in accordance with Figure 3 shall be permanently attached to the bottom of each leg.

3.3.5.1 Drain board. A Drain board, 711.2 x 863.6 mm (28 x 34 inches), shall be provided in the sink. The drain board shall have a means to raise and lower the front edge of the sink not less than 114.3 mm (4.50 inches) and to hold it in position on three intermediate stops.

3.3.5.2 Sprinkler pipe. Sprinkler pipes shall be corrosion-resistant pipe or tubing and shall have a control valve mounted for easy access. The pipe shall be mounted in such manner that the streams of water spray down the inclined plane of the Drain board.

3.3.5.3 Storage cabinet. Each type II sink shall have a storage cabinet located in the base of the sink. The two doors on the front of the sink shall open to expose the full height and width of the cabinet, with the shelf located 228.6 mm (9 inches) from the bottom of the supports used as the cabinet bottom.

3.3.6 Transportability. When mounted in a vehicle, both type I and type II sinks shall withstand the shock and vibration of road travel, including off-the-road (rough terrain) conditions when mounted in a vehicle. When specified (see 6.1), the contractor shall devise a road test, subject to the approval of the contracting officer, to determine the adequacy of the unit’s transportability.

3.3.7 Treatment and painting. Unless otherwise specified (see 6.1), or unless the material is inherently corrosion resistant, the table shall be treated and painted for corrosion protection using the contractor’s standard practice.

3.3.8 Fungus and moisture resistance. Materials used in the construction of this table shall resist mildew, rot, fungus and moisture encountered in tropical climates.

3.3.9 Interchangeability. All parts having the same part number shall be functionally and dimensionally interchangeable (see 6.4.2).

3.3.10 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within the tolerances specified and all other requirements of this Commercial Item Description are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch/pound units, a request should

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:13Z
Check the source to verify that this is the current version before use.

be made to the contracting officer to determine if the product is acceptable. The contracting officer has the option of accepting or rejecting the product.

3.3.11 Ease of maintenance. Components requiring adjustment, maintenance, repair, or replacement shall be readily accessible, without requiring removal of major components or assemblies.

4. QUALITY ASSURANCE PROVISIONS

4.1 Product Conformance. The products provided shall meet the salient characteristics of this Commercial Item Description, conform to the producer's own drawings, specifications, standards and quality assurance practices, and are the same sinks offered for sale in the commercial marketplace. The Government reserves the right to require proof of such conformance.

4.2 Market acceptability. The sink offered shall be the latest model of the standard product of the supplier and shall have been used in the field for at least one year by the commercial organizations.

4.3 Examinations. Each sink examined, shall be examined for compliance with the requirements specified in 3.3. Each element of inspection shall encompass all visual and functional examinations. Nonconformance to any specified requirement or the presence of one or more defects, lessening required efficiency, shall constitute cause for rejection. Any redesign or modification following failure to meet the specified requirements shall receive particular attention for adequacy and suitability.

5. PACKAGING

5.1. Preservation, packing, and marking shall be as specified in the contract or order.

6. NOTES

6.1. Ordering data. Procurement documents should specify the following:

a. Title, number and date of this specification.

b. Type of sink required (see section 2).

c. When a road test is required (see 3.3.6).

d. When treatment and painting shall be other than the standard practice (see 3.3.7).

6.2. Part Identification Number (PIN). The following part identification numbering procedure is for government purposes and does not constitute a requirement for the contractor. This example describes a part numbering system for CID A-A-XXXXX.

AAXXXXX-2
|
|
|____Type II

6.3. Figures. The figures show limiting dimensions for type I and type II sinks, and depict a configuration that has been found acceptable. However, they are illustrative only and not intended to preclude the furnishing of other sinks that conform to the requirements of this specification.

6.4 Definition. For the purposes of this CID, the following definition applies.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:13Z
Check the source to verify that this is the current version before use.

6.4.1 Recovered materials. For the purpose of this requirement, recovered materials are those that have been collected from solid waste and processed to become a source of raw materials, as distinguished from virgin raw materials. Used, rebuilt, or remanufactured components, pieces, or parts shall not be incorporated in the sinks.

6.4.2 Interchangeable parts. Interchangeable parts are defined as two or more parts possessing such functional and physical characteristics as to be equivalent in performance and durability. These parts are capable of being exchanged one for the other without alteration of the parts; of mating or adjoining parts, except for adjustment; and without selection for fit or performance.

6.5 Subject term (key words) listing.

Trough
Cabinet
Plates, photographic
Plates, lithographic
Equipment, photographic
Equipment, lithographic

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:13Z
Check the source to verify that this is the current version before use.

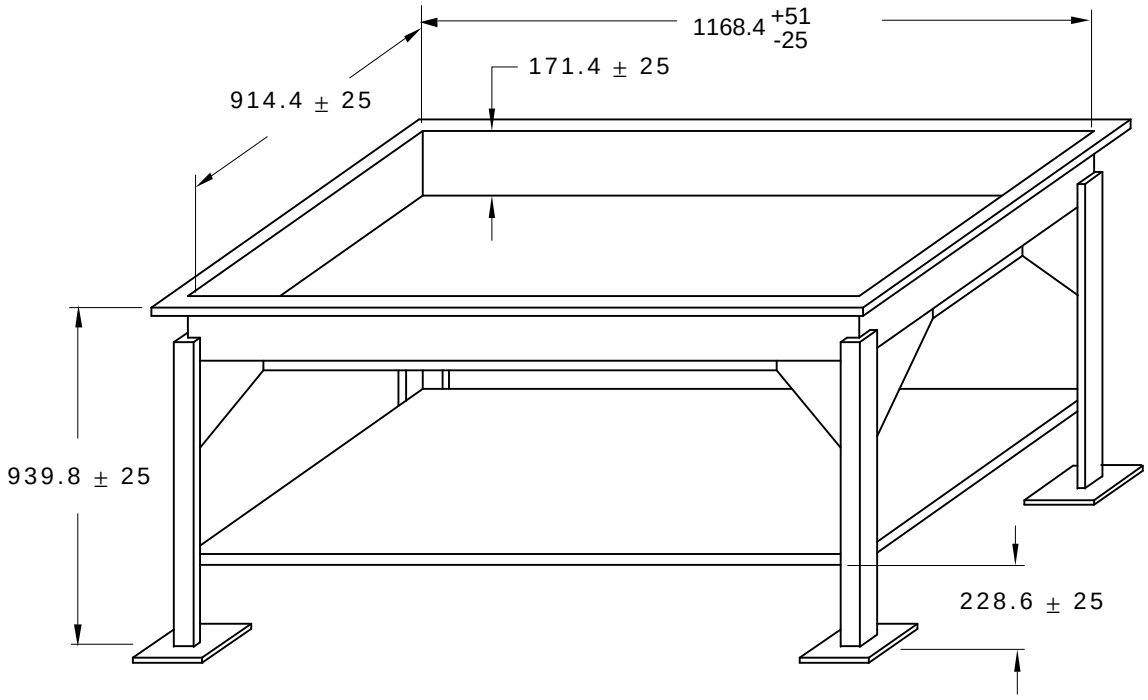

NOTES: 1. All trough dimensions are inside dimensions.
2. Dimensions are in millimeters

Figure 1. Type I, Photographic Sink (Typical).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:13Z
Check the source to verify that this is the current version before use.

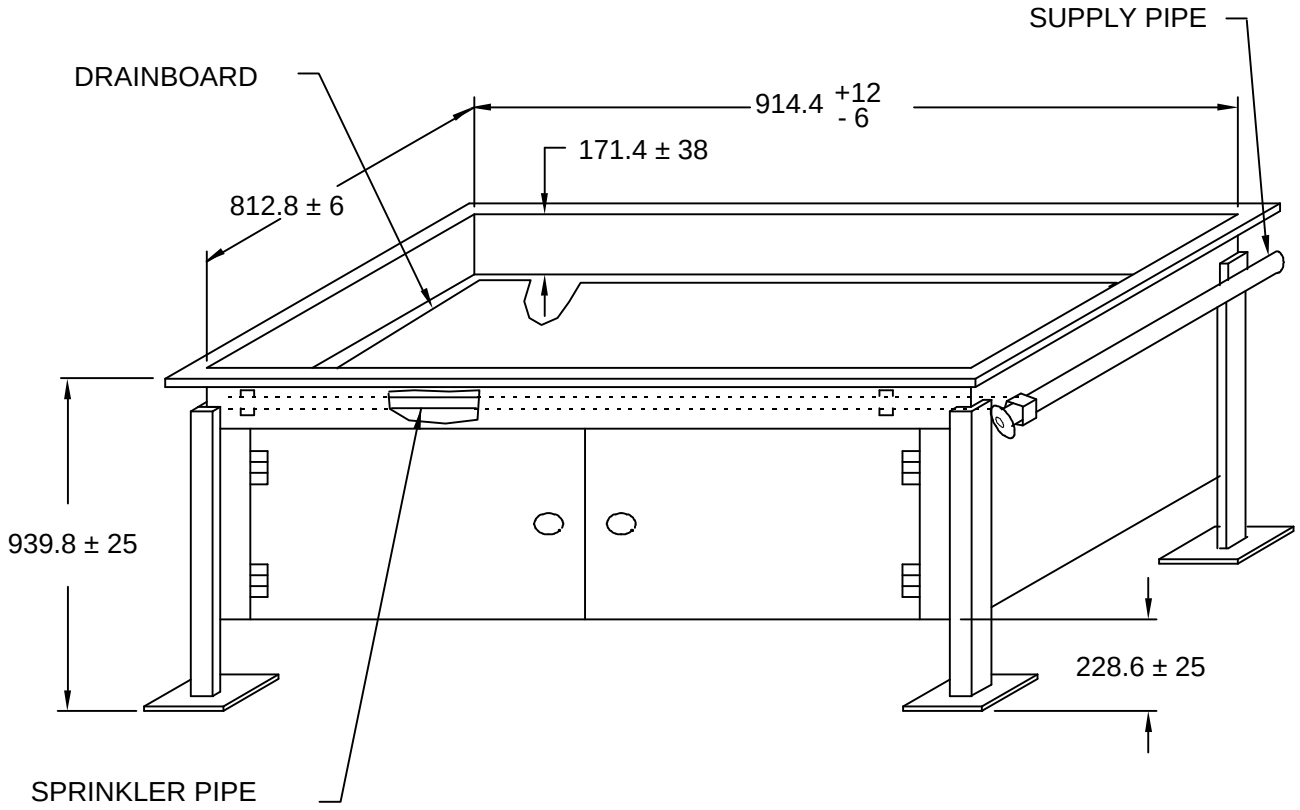

NOTE: 1. All trough dimensions are inside dimensions.
2. Dimensions are in millimeters.

Figure 2. Type II, Lithographic Sink (Typical).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:13Z
Check the source to verify that this is the current version before use.

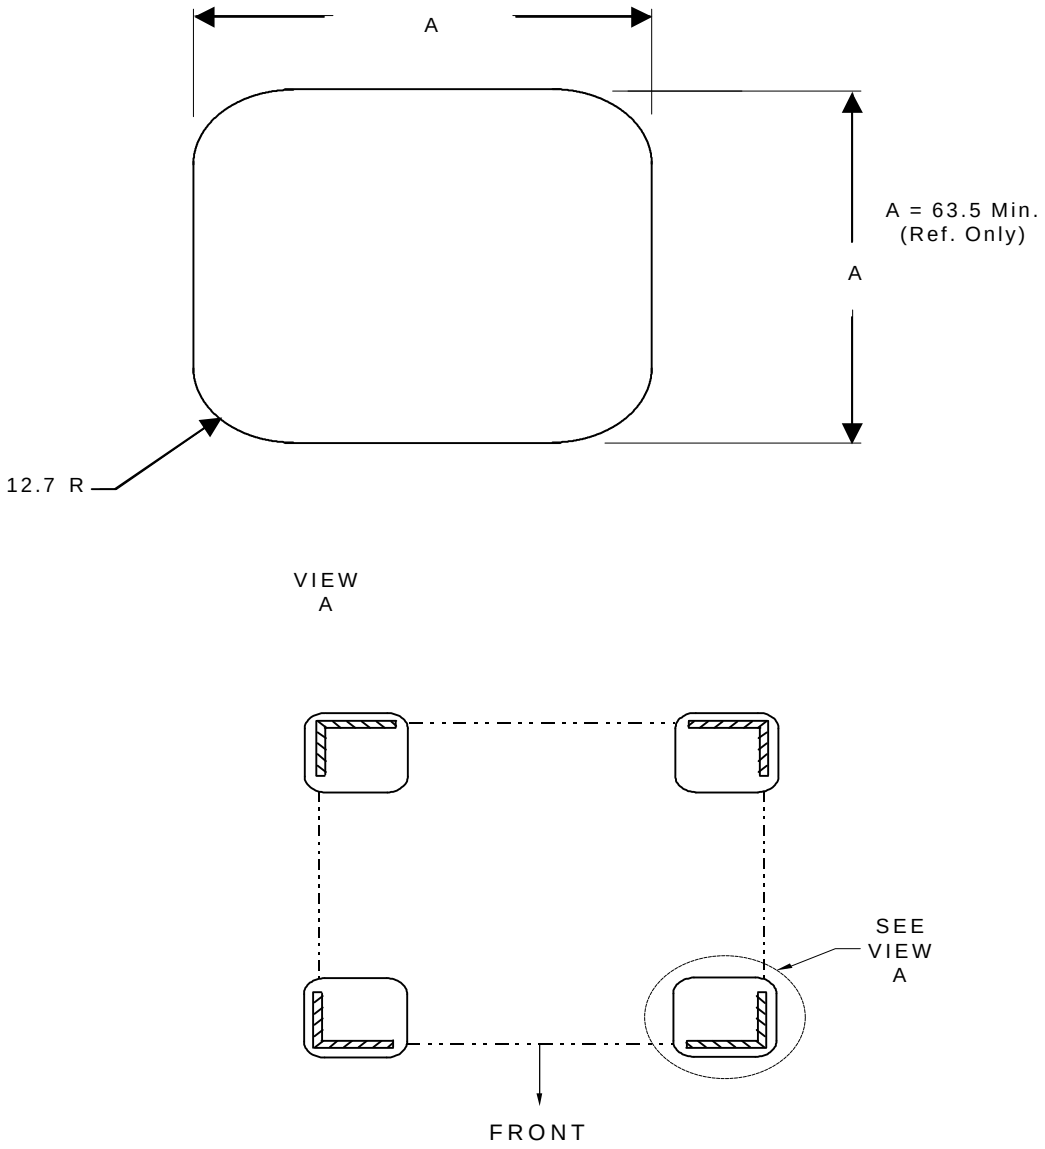

DETAIL AND POSITIONING OF FOOT PLATES ON SINKS

NOTE: 1. Dimensions are in millimeters.
2. Tolerances shall be ±.5mm.

Figure 3. Foot Plates.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:13Z
Check the source to verify that this is the current version before use.

Custodian:
Army – CE3
Navy – SA
Air Force – 99

Preparing activity:
Army – CE3
(Project 3610-0428)

Review activity:
DLA – GS
Army – GL
Navy – MC
Air Force – 70
Air Force - 84

Civilian Coordinating Activity:
GSA-FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:13Z
Check the source to verify that this is the current version before use.