METRIC

A-A-52571

JANUARY 30, 1998

COMMERCIAL ITEM DESCRIPTION

TARGET, SURVEYING, BEACON (WITH CARRYING BAG)

The General Services Administration has authorized the use of this Commercial Item Description (CID), as a replacement for MIL-T-3510E, for all federal agencies.

1. SCOPE

1.1 Scope. This CID covers a fabric-covered, pyramid shaped, target beacon with carrying bag for surveying applications.

2. SALIENT CHARACTERISTICS

2.1. Description. The target shall be a fabric-covered, pyramid shaped beacon. Both the target and flag are contrasting colors for heightened visibility. The carrying bag shall be constructed of a material that is waterproof, lightweight, and adequately packages all of the target, flag, and frame components.

2.2. Target characteristics. The following paragraphs and figure 1 describe the equipment to be provided.

2.2.1. Frame. The frame shall be constructed of durable, rigid, weatherproof, and lightweight materials. The frame shall be adjustable with a minimum height of 76.2 cm (2.5 feet) and a maximum of 304.8 cm (10 feet). Each support shall be independently adjustable to provide a sturdy base on broken or uneven ground. A method of preventing blowover/toppling shall be provided. The top portion of the frame will hold the signal panel and flag. The apex of the top frame shall come to a .12 mm radius spherical point.

2.2.2. Signal panel. The signal panel shall be pyramid shaped with the top being flat and measuring 6.35 cm (2.5 inches) per side and the base being 63.5 cm (25 inches) per side. The

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may improve this document should be sent to: U.S. ARMY TOPOGRAPHIC ENGINEERING CENTER, ATTN: CETEC-TD-T, 7701 TELEGRAPH ROAD, ALEXANDRIA, VA 22315-3864.

AMSC N/A FSC 6675

Distribution Statement A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:13Z
Check the source to verify that this is the current version before use.

panels will have contrasting colors. Each side panel will present a flat surface. The signal panel shall be made of a material that is weather resistant and resistant to deterioration.

2.2.3. Flag. The flag shall measure 30.48 × 60.96 cm (12 × 24 inches) and be colored as described in 2.2.4. The flag shall be made of the same material as the signal panel. The flag shall be secured to the top most section of the frame with the top of the flag located approximately 7.62 cm (3 inches) below the apex of the pointed pole.

2.2.4. Panel colors. The panels of the signal assembly and the target flag shall be colors such as yellow, international orange, or red. The coloring shall also be weather resistant and resistant to deterioration.

2.2.5. Fasteners. All finger or hand operable fasteners (i.e., wing nuts, turn keys, etc.) shall be made captive by the simplest means possible to prevent their loss.

2.2.6. Target beacon setup. The target beacon frame, signal panel, and flag shall be capable of being set up and secured or disassembled and stowed by one person without the use of tools.

2.2.7. Carrying Bag. All target beacon components shall easily fit within the carrying bag. The carrying bag shall be transportable by one person. Appropriate adjustable strapping, webbing and/or handles, or any combination thereof, shall be incorporated as an integral part of the bag. The carrying bag shall be weatherproof, wear resistant, and rugged.

2.2.8. Equipment weight. Total weight of the equipment and bag shall not be greater than 42 pounds.

2.3. Fungus resistance. The target beacon materials shall be fungus-inert (see 6.5.1) or shall be treated with a commercially accepted, moisture and fungus-proofing compound. This requirement need not apply to components that are, or are within enclosures that are, hermetically sealed.

2.4. Identification of materials and finishes. The contractor shall identify and document the specific material and material finish or treatment of all components and sub-components, and shall make this information available upon request to the contracting officer or designated representative.

2.5. Interchangeability. All parts having the same part number shall be functionally and dimensionally interchangeable (see 6.5.2).

2.6. Inch-pound products. Products manufactured to inch-pound dimensions will be considered on an equal basis with those manufactured using metric units, provided they fall within specified tolerances and all other requirements of this CID are met. If a product is manufactured to inch-pound dimensions and exceeds the tolerances specified, a request should be made to the contracting officer to determine if the product is acceptable. The contracting officer has the option of accepting or rejecting the product.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:13Z
Check the source to verify that this is the current version before use.

3. REGULATORY REQUIREMENTS

3.1. Recovered material. The offerer/contractor is encouraged to use recovered materials (see 6.5.3) to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

4. QUALITY ASSURANCE PROVISIONS

4.1. Product conformance. The products provided shall meet the salient characteristics of this commercial item description, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial market. The government reserves the right to require proof of such conformance.

4.2. Market acceptability. The product offered shall be of the latest model of the standard product of the supplier, and shall have been used in the field for at least one year by commercial organizations.

4.3. Examinations. Each target beacon examined shall be inspected for compliance with the requirements specified in 2.1 through 2.6. Any modification following failure to meet the specified requirements shall receive particular attention for adequacy and suitability. This element of inspection shall encompass all examinations of performance and dimensional requirements. Nonconformance to any specified requirement, or the presence of one or more defects shall constitute cause for rejection.

5. PACKAGING

5.1. Preservation, packing, and marking shall be as specified in the contract or order.

6. NOTES

6.1. Intended use. The target is intended for use as a beacon in marking angular surveying measurements.

6.2. When this CID is used for procurement the product conformance clause should appear in the solicitation.

6.3. Acquisition requirements. Acquisition documents should specify the following:

a. Title, number and date of this CID.

b. Level of preservation and packing required.

6.4. Drawings. Drawing TA13217E2455, Target, Surveying, Beacon (with Carrying Bag), is cited as reference information only. It provides an example of a target, surveying beacon that has been found to be acceptable in the past. There is, however, no guarantee that this design will meet all the requirements. Contractors may use this design or provide a design of their own that must meet the performance requirements specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:13Z
Check the source to verify that this is the current version before use.

6.5. Definitions. For the purposes of this CID, the following definitions apply.

6.5.1. Fungus-inert. A fungus inert material is a material that is not a nutrient to fungi.

6.5.2. Interchangeable parts. Interchangeable parts are defined as two or more parts possessing such functional and physical characteristics as to be equivalent in performance and durability. These parts are capable of being exchanged one for the other without alteration of the parts; of mating or adjoining parts, except for adjustment; and without selection for fit or performance.

6.5.3. Recovered materials. For the purpose of this requirement, recovered materials are those that have been collected from solid waste and reprocessed to become a source of raw materials, as distinguished from virgin raw materials.

6.6. Data requirements. The contracting officer should include, in the contract or order, any data requirements, such as maintenance and operation manuals, instructional materials, and technical publications to be furnished with each target beacon.

6.7. Provisioning. The contracting officer should include, in the contract or order, provisioning requirements for repair parts; maintenance tools (including any special tools), as necessary; and instructions regarding shipment of the target beacon.

6.8. Subject term (key words) listing.

Markers

Surveying markers

Monuments

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:13Z
Check the source to verify that this is the current version before use.

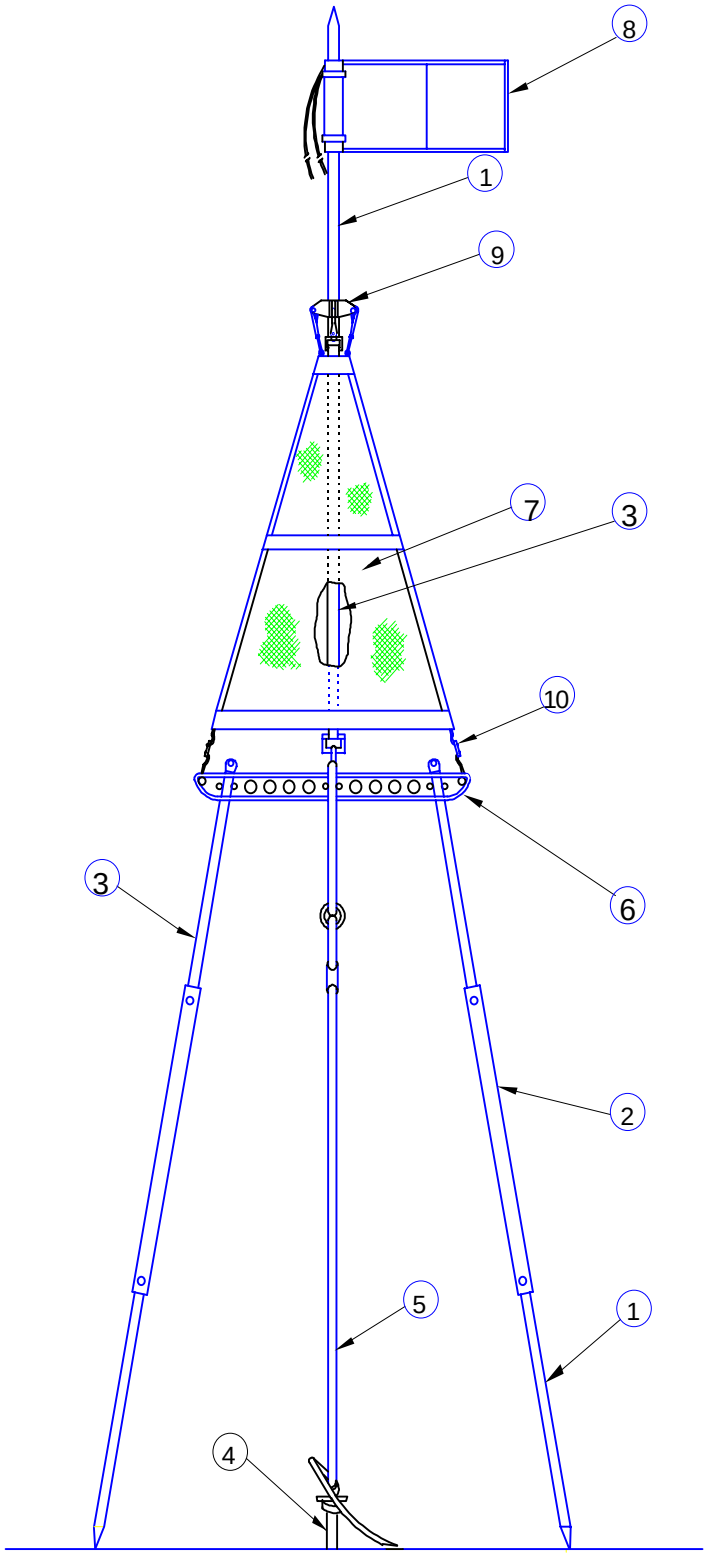

Legend

1. Pole, pointed
2. Sleeve.
3. Pole.
4. Pin, Type II.
5. Guy rope.
6. Clamp.
7. Signal panel.
8. Flag.
9. Collar.
10. Strap, webbing, Adj.

FIGURE1.Target,surveying, beacon.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:13Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CE3
Navy - MC

Preparing Activity:
Army - CE3
(Project 6675-0058)

Civilian Coordinating Activity:
GSA-FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:13Z
Check the source to verify that this is the current version before use.