[METRIC]
A-A-52587
January 23, 1996
SUPERSEDING
MIL-H-52780(ME)
27 February 1974

COMMERCIAL ITEM DESCRIPTION

HOOK, ROPE, DECK

The General Services Administration has authorized the use of this Commercial Item Description (CID) for all federal agencies.

1. SCOPE. This CID covers requirements for one type of rope deck hook. The hook is intended for use in bolted tank service.

2. SALIENT CHARACTERISTICS

2.1 Description. The hook shall be as shown in Figure 1, and as specified herein (see 6.3).

2.2 Material. Material shall be as specified herein. Material not specified shall be selected by the supplier and shall be subject to all provisions of this specification.

2.2.1 Steel bar. Steel bar shall be 11.13 millimeters (mm) (0.438 inch (in.)) diameter, round, and shall conform to ASTM A663/A663M with a chemical composition suitable for the purpose.

2.3 Finish. After forming, the hook shall be zinc galvanized by the hot-dip process in accordance with ASTM A153, Class C, and followed by a zinc-phosphate conversion treatment in accordance with ASTM D2092, Method A.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any other data which may improve this document should be sent to: U.S. Army Tank-automotive and Armaments Command, ATTN: AMSTA-TR-E/BLUE, Warren, MI 48397-5000.

ASMC N/A FSC 4030

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:13Z
Check the source to verify that this is the current version before use.

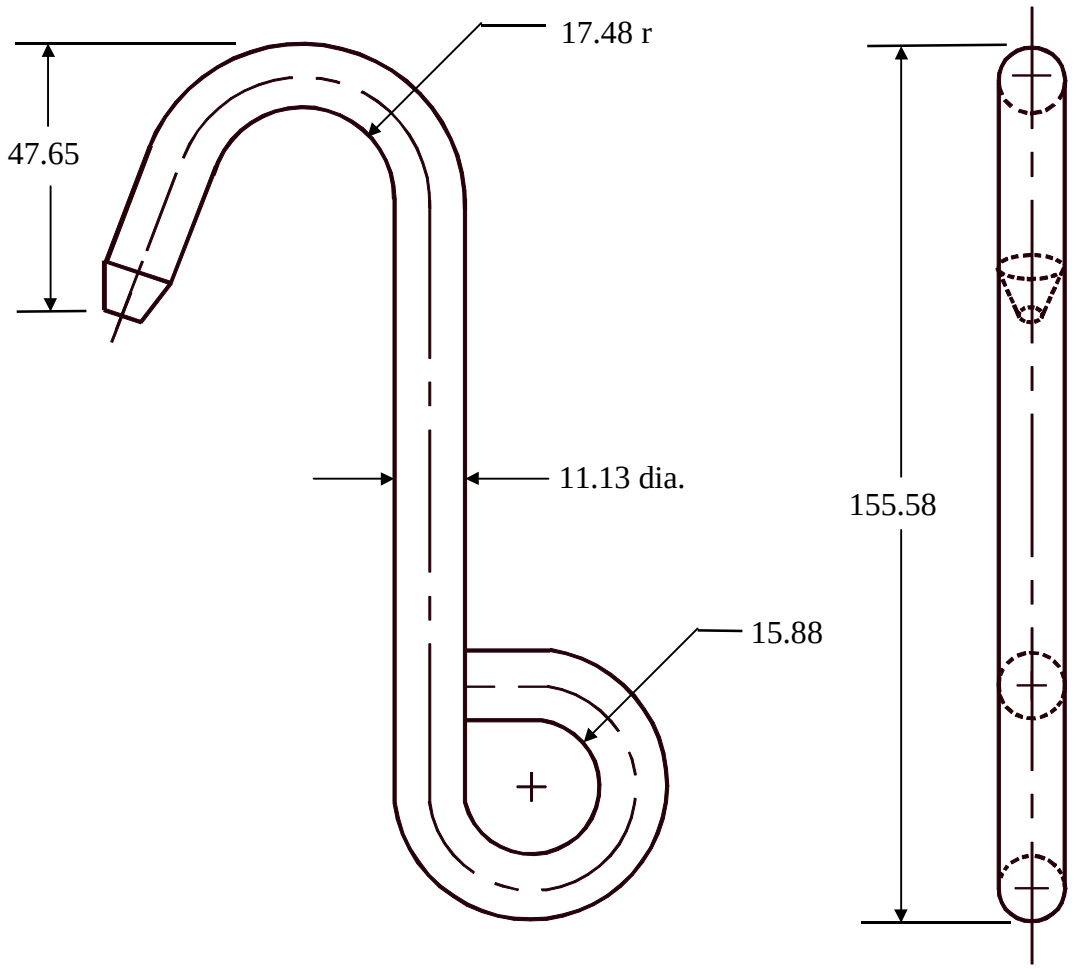

NOTE:

1. Dimensions are in mm.

FIGURE 1. Rope deck hook.

2.4 Identification and markings. Identification and markings shall be permanent and legible and shall include, as a minimum, the manufacturer's trademark and the national stock number (NSN).

3. REGULATORY REQUIREMENTS

3.1 Recovered material. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:13Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. The contractor is responsible for the performance of all inspections (examinations and tests).

4.2 Contractor certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this CID and that the product conforms to the producer's own drawings, specifications, workmanship standards, and quality assurance practices. Items with known defects shall not be submitted for Government acceptance. The Government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

5. PACKAGING. Preservation, packing, and marking shall be as specified in the contract or order (see 6.2).

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Addresses for obtaining copies of referenced documents.

6.1.1 Government documents. The Code of Federal Regulations (CFR) may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.

6.1.2 Non-Government documents. ASTM A153 “Standard Specification for Zinc Coating (Hot-Dip) on Iron and Steel Hardware” (DoD adopted), Copies of ASTM A663/A663M “Standard Specification for Steel Bars, Carbon Merchant Quality, Mechanical Properties” (DoD adopted), and ASTM D2092 “Standard Guide for Preparation of Zinc-Coated (Galvanized) Steel Surfaces for Painting” (DoD adopted) are available from the American Society for Testing and Materials, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959.)

6.2 Ordering data. Acquisition documents must specify the following:

a. Title, number, and date of this CID.
b. Issue of the DoDISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced.
c. Quantity required.
d. Packaging requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:13Z
Check the source to verify that this is the current version before use.

6.3 Information figure. Figure 1 shows a type of rope deck hook which has been found acceptable; however, the figure is included for illustration only and is not intended to preclude the furnishings of other rope deck hooks which conform to this specification.

6.4 Cross-reference data. Hooks conforming to this CID are interchangeable/substitutable with hooks conforming to MIL-H-52780(ME), dated 27 February 1974.

MILITARY INTERESTS:

Custodian:
Army - AT

CIVIL AGENCY COORDINATING ACTIVITY:
GSA - FSS

Preparing Activity:
Army - AT

(Project 4030-0274)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:13Z
Check the source to verify that this is the current version before use.