[METRIC}
A-A-52589
February 15, 1996
SUPERSEDING
MIL-O-13417B
12 April 1983

COMMERCIAL ITEM DESCRIPTION

OILERS, AIR LINE, FOR PNEUMATIC TOOLS

The General Servces Administration has authorized the use of this Commercial Item Description (CID) for all federal agencies.

1. SCOPE. This CID covers two sizes of oilers for use in the air lines of pneumatic tools.

2. CLASSIFICATION. The oilers shall be the following sizes, as specified (see 7.l):

Size 1 - 1/4 liter (1/2 pint)
Size 2 - 1/2 liter (1 pint)

3. SALIENT CHARACTERISTICS

3.1 Description. The oilers shall atomize and feed, in any position, any lubricant or liquid grease which is suitable for use in pneumatic tools in the temperature range of 43 degrees Celsius (°C) (110 degrees Fahrenheit (°F)) to -32°C (-25°F) The oilers shall be equipped with an adjustable oil-metering valve and an oil-filler plug.

3.2 Material. Material shall be of the contractor's current commercial product and shall be subjected to all provisions of this specification.

3.2.1 Material deterioration and control. The oilers shall be fabricated from compatible materials, inherently corrosion resistant or treated to provide protection against the various forms of corrosion and deterioration that may be encountered in any of the applicable storage and operating environments to which the item may be exposed.

Beneficial comments, recommendations, additions, deletions clarifications, etc and any other data which may improve this document should be sent by letter to U S Army Tank-automotive and Armaments Command, ATTN AMSTA-TR-E/BLUE, Warren, MI 48397-5000

FSC 4930

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T09:13Z
Check the source to verify that this is the currentversion before use.

3.2.1.1 Dissimilar metals. Dissimilar metals shall not be used in intimate contact with each other unless protected against galvanic corrosion.

3.2.1.2 Identification of materials and finishes. The contractor shall identify the specific material, material finish or treatment for use with components and sub-components, and shall make information available, upon request, to the contracting officer or designated representative.

3.2.2 Inserts. When the body of the oiler is aluminum, threaded steel inserts shall be used for the oil-filter and oil-regulator access holes and for the air line connections.

3.3 Temperature conditions. The oilers shall perform as specified herein in any ambient temperature from 38°C(100°F) to -32°C (-25°F) when filled with pneumatic-tool lubricant of viscosity suitable for the particular operating temperature.

3.4 Oil-metering valve. The oil-metering valve shall be removable for cleaning and repairing and shall permit adjustment of the lubricant flow without taking the pressure off the air chamber or interrupting the operation of the pneumatic tool.

3.4.1 Locking device. The lubricator- shall be supplied with a locking or tamper-proof, adjusting knob, which shall prevent oil flow changes resulting from shock or vibration.

3.5 Oil-filler plug. An oil-filler plug shall be provided with a hole for bleeding-off pressure inside the oil chamber before threads are disengaged.

3.6 Hydrostatic pressure. The oilers shall withstand a hydrostatic pressure of 1034 kilopascals (kPa) (150 pounds per square inch (psi)) with no sign of leaks or deformation.

3.7 Performance.

3.7.1 Pressure drop. The pressure drop across the oiler shall not exceed 35 kPa (5 psi) with accessories in place.

3.7.2 Pumping. There shall be no unatomized lubricant or excessive lubricant discharged beyond the normal atomized flow each time the valve is opened.

3.7.3 Flow. The oiler shall atomize a sufficient amount of lubricant to any tool that may be used in any position.

3.7.4 Lubricant leakage. There shall be no lubricant passed into the air passage from the oiler during static pressure.

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:13Z
Check the source to verify that this is the current version before use.

3.8 Size 1 (1/4 liter capacity). The oiler shall provide constant and ample lubrication to the working parts of pneumatic tools with an air supply as low as 0.28 liter per min (1/min) (10 cubic feet per minute (cfm)). The inlet and outlet shall be threaded as specified in the contract or order. When specified (see 7.1), the oiler shall have universal, quick-d~sconnect-type hose couplings for both the inlet and outlet connections.

3.9 Size 2 (1/2 liter capacity). The oiler shall provide constant and ample lubrication to the working parts of pneumatic tools with an air supply as low as 1.13 1/min (40 cfm). Threads shall be provided for both the inlet and outlet connections as specified in the contractor or order. When specified (see 7.1). the oiler shall have universal, quick-disconnect-type hose couplings for both the inlet and outlet connections.

3.9.1 Hose assembly. When specified (7.1), the oiler shall be provided with 3 meters (m) (10 feet (ft)) of 19 millimeters (mm) (3/4-inch) air hose, and universal, quick-disconnect-type hose couplings for both ends.

3.10 Workmanship. The quality of workmanship shall be such as to produce oilers that are in accordance with the requirements of this CID and are so constructed as to insure proper functioning of all parts of the oiler.

4. REGULATORY REQUIREMENTS

4.1 Responsibility for inspection. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. QUALITY ASSURANCE PROVISIONS

5.1 Contractor certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this CID, and that the product conforms to the producer’s own drawings, specifications, standards, and quality assurance practices. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

6. PACKAGING. Preservation, packing, and marking shall be as specified m the contract or order.

7. NOTES

(This section contains Information of a general or explanatory nature that may be helpful, but is not mandatory.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:13Z
Check the source to verify that this is the current version before use.

7.1 Acquisition data. Acquisition documents should specify the following:

a. Title, number, and date of this CID.
b. Size oiler required.
c. Outlet and inlet connections required for size 1 oiler.
d. Outlet and inlet connections required for size 2 oiler.
e. When hose is required for size 2 oiler.
f. Selection of applicable level and packaging requirements.

7.2 Part or identification number (PIN). The PINs to be used for oilers acquired to this CID are created as follows:

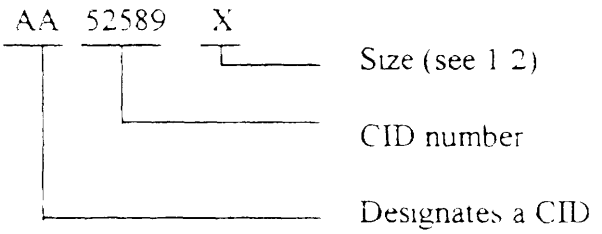

7.3 Cross-reference data. Oilers conforming to this CID are mterchangeab!ti'substitutable with oilers conforming to MIL-O-13417B.

7.4 The Code of Federal Regulations (CFR) may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.

MILITARY INTERESTS:

Custodians:
Army - AT
Navy - MC

Review Activity:
DLA - CS

CIVIL AGENCY COORDINATING ACTIVITY:
GSA - FSS

Preparing Activity:
Army - AT

(Project 4930-0015)

Source: https://assist.dla.mil -- Downloaded: 202640-26T09:13Z
Check the source to verify that this is the current version before use.