[INCH-POUND]
A-A-52594
February 14, 1996
SUPERSEDING
MS39329
6 November 1968

COMMERCIAL ITEM DESCRIPTION

DRILL ROD SECTION, ROCK DRILL FOR DRIFTER DRILLS

The General Services Administration has authorized the use of this commercial item description (CID) for all federal agencies.

1. SCOPE. This CID covers a drill rod section for use with drifter drills.

2. SALIENT CHARACTERISTICS

2.1 Materials. Unless specified herein, the materials used shall be in accordance with manufacturer's materials specification for drill rod.

2.2 Design and construction. The drill rod section shall be in accordance with the requirements of this CID and shall be the manufacturer's standard commercial product (see Figure 1). Drill rod section nominal overall length shall be 12 feet (ft) (3.65 meters (m)). Drill rod section outside diameter (OD) shall be not more than 1.5 inches (in) (3.8 centimeters (cm)) and the air/water passageway shall be a nominal 0.5 in (1 .27 cm) in diameter. Threaded portion shall be 1.5 in (38 cm) rope thread. Each end of the drill rod shall be threaded not less than 24 in (61 cm). Threads shall be turned at 90 degrees to centerline of the piece within 0.005 in (0.13 millimeters (mm)). Drill rod ends shall be square with thread within 0.005 in (O. 13 mm). Drill rod comers shall be chamfered in accordance with good commercial practice. Full length of the rod shall be carburized inside and outside. External surfaces of the rod shall be carburized to a case

Beneficial comments, recommendations, additions, deletions clarifications, etc. and any other data which may improve this document should be sent by letter to: U.S. Army Tank-automotive and Armaments Command, ATTN: AMSTA-TR-E/BLUE, Warren, MI 48397-5000.

FSC 3820

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T09:13Z
Check the source to verify that this is the current version before use.

depth of not less 0.045 in (1.15 mm) but not more than 0.065 in (1 .65 mm). Internal surfaces shall be carburized to a depth of not less than 0.035 in (0.9 mm). Rod shall have a case hardness between Rockwell “C” (RC) hardness RC 58 and RC 65. The manufacturer’s standard means for maintaining thread lubrication shall be provided

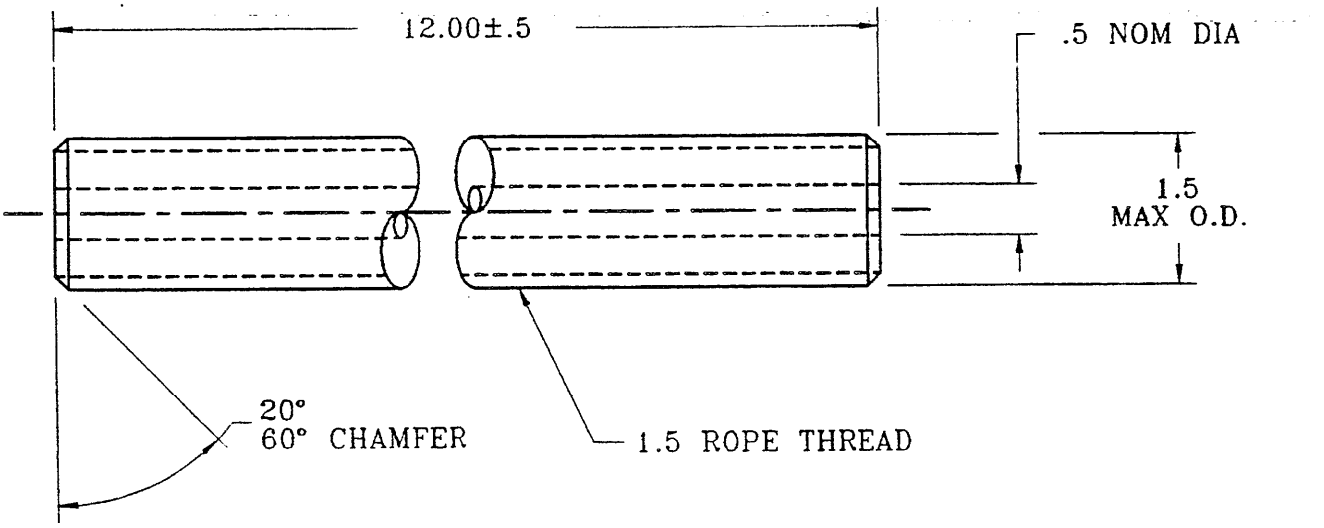

Conversion	
Inches	Centimeters
12 ± 0.5	30.5 ± 1.27
0.5	1.27
1.5	3.8
1.5	3.8

NOTE: Dimensions are in inches.

FIGURE 1. Drill rod section.

2.3 identificaiton and marking. Identificaiton and markings of the drill rod shall be permanent and legible and shall include, as a minimum the manufacturer's identification code (CAGE), the contract number, the part identification number (PIN) AA52594-1 and the national stock number (NSN).

3. REGULATORY REQUIREMENT. There off effer or. contractor is encouraged to use covered materials to the maximum extent practicable, in accordance with parqagraph 23.403 of the Federal Acquisition Regulation (FAR).

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:13Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PREVISIONS

4.1 Responsibility for inspection. The contractor is responsible for the performance of all inspection examinations and tests.

4.2 Contractor certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this CID and that the product conforms to the producer's own drawings, specifications, workmanship standards, and quality assurance practices. Items with known defects shall not be submitted for government acceptance. The government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

5. PRESERVATION, PACKAGING, PACKING, AND MARKING. Preservation, packaging, packing, and marking shall be as specified in the contractor order (see 6.2).

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Source of documents. The Code of Federal Regulations (CFR) may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.

6.2 Ordering data. Acquisition documents must specify the following:

a. Title, number, and date of this CID.
b. Issue of DODISS to be cited in the solicitation.
c. Type, PIN, and quantity of drill rods required.
d. Selection of applicable level and packaging requirements.

6.3 Cross-reference data. Drill rod sections conforming to this CID are interchangeable/ substitutable with drill rod sections conforming to MS39329.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:13Z
Check the source to verify that this is the current version before use.