[INCH-POUND]
A-A-52595
Febuary 21, 1996
SUPERSEDING
MS39330
6 November 1968

COMMERCIAL ITEM DESCRIPTION

BIT, STAR, ROCK DRILL, X-TYPE, FOR DRIFTER DRILLS

The General Services Administration has authorized the use of this commercial item description (CID) for all federal agencies.

1. SCOPE. This CID covers star bits for use with drifter drills.

2. SALIENT CHARACTERISTICS

2.1 Materials. Unless otherwise specified herein, materials shall be in accordance with manufacturer's specifications for star bits.

2.2 Design and construction. The star bits shall be in accordance with the requirements of this specification and shall be the manufacturer's standard commercial product (see figure 1).

2.2.1 Threads. Threads shall be turned 90 degrees to centerline and concentric within 0.005 inch of center blow hole.

2.2.2 Rock bit. All bit bodies shall be of alloy steel having a case hardness of not less than Rh42C. Brazing material used to secure the tungsten carbide inserts to the body of the bits shall be 40 to 50 percent silver-bearing alloy or not less than 40 percent copper alloy. Bonding characteristics of the copper alloy shall be not less than those of the silver-bearing alloy.

Beneficial comments, recommendations, additions, deletions clarifications, etc. and any other data which may improve this document should be sent to: U.S. Army Tank-automotive and Armaments Command, ATTN: AMSTA-TR-E/BLUE, Warren, MI 48397-5000.

FSC 3820

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:13Z
Check the source to verify that this is the current version before use.

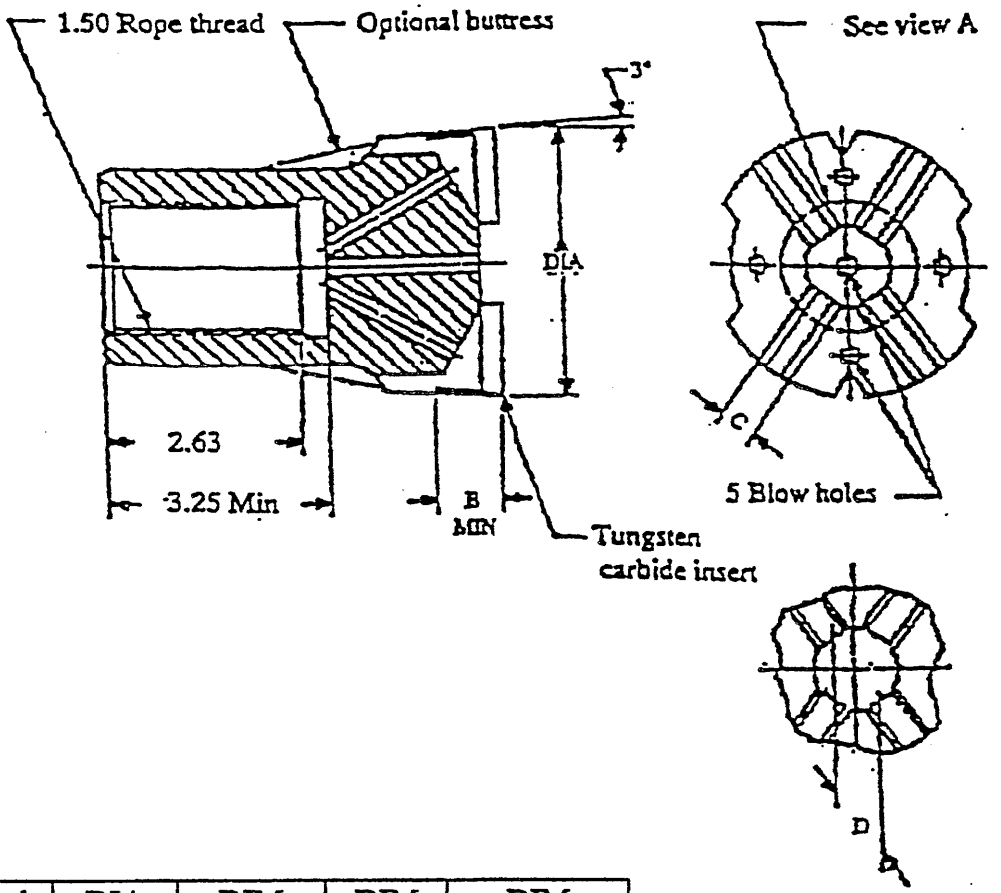

PIN Dash No.	DIA A	DIM B	DIM C	DIM D
-1	2.50	1.0	0.50	0.65 ±0.03
-2	2.75	1.0	0.50	0.65 ±0.03
-3	3.00	1.0	0.56	0.68 ±0.01
-4	3.50	1.0	0.56	0.68 ±0.01
-5	4.00	1.0	0.62	1.03 ±0.09

NOTES:

1. All dimensions are in inches.
2. Tolerances shall be ± 0.005 inch and angular ± 1 degree (°).
3. All machine surfaces shall be finished to 125 microns.
4. The pin dash numbers and the prior MS dash numbers are the same.

FIGURE 1. Rock bit.

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:13Z
Check the source to verify that this is the current version before use.

2.3 Identificaiton and marking. Identification and markings of the rock bit shall be permanent and legible and shall include, as a minimum, the manufacturer's identification code (CAGE), the contract number, the part or identifying number (PIN) (see 6.2 and 6.3) and the. national stock number (NSN).

3. REGULATORY REQUIREMENT. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. The contractor is responsible for the performance of all inspections (examinations and tests).

4.2 Contractor certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this CID and that the product conforms to the producer's own drawings, specifications, workmanship standards, and quality assurance practices. Items with known defects shall not be submitted for Government acceptance. The Government reserves the right to require proof of such conformance prior to the first delivery and thereafter as maybe otherwise provided for under the provisions of the contract.

5. PRESERVATION, PACKAGING, PACKING, LABELING, AND MARKING. Preservation, packing, and marking for the desired level shall be as specified in the contractor order (see 6.2).

6. NOTES

(This section contains information of a general or explanatory nature that maybe helpful, but is not mandatory.)

6.1 Source of documents. The Code of Federal Regulations (CFR) maybe obtained from the superintendent of documents, U.S. Government Printing Office, Washington, DC 20402.

6.2 Ordering data. Acquisition documents should specify the following:

a . Title, number, and date of this CID.
b . Issue of the DODISS to be cited in the solicitation.
c . Type, PIN, and quantity of star bits required.
d . Selection of applicable level and packing requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:13Z
Check the source to verify that this is the current version before use.

6..3 Part or identifying number (PIN). The PIN to be used for acquisition of star bits for drifter are created as follows:

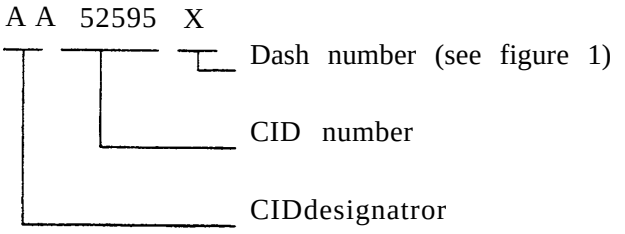

6.4 Cross-reference data. Star bits conforming to this CID are interchangeable/substitutable with star bits conforming to MS39330.

MILITARY INTERESTS:

Custodians:
Army - AT
Navy - MC
Air Force -99

Review Activities:
Air Force -84

CIVIL AGENCY COORDINATING ACTIVITY:
GSA - FSS

Preparing Activity:
Army - AT

(Project 3820-001 1)

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:13Z
Check the source to verify that this is the current version before use.