
FED. SUP CLASS
4730

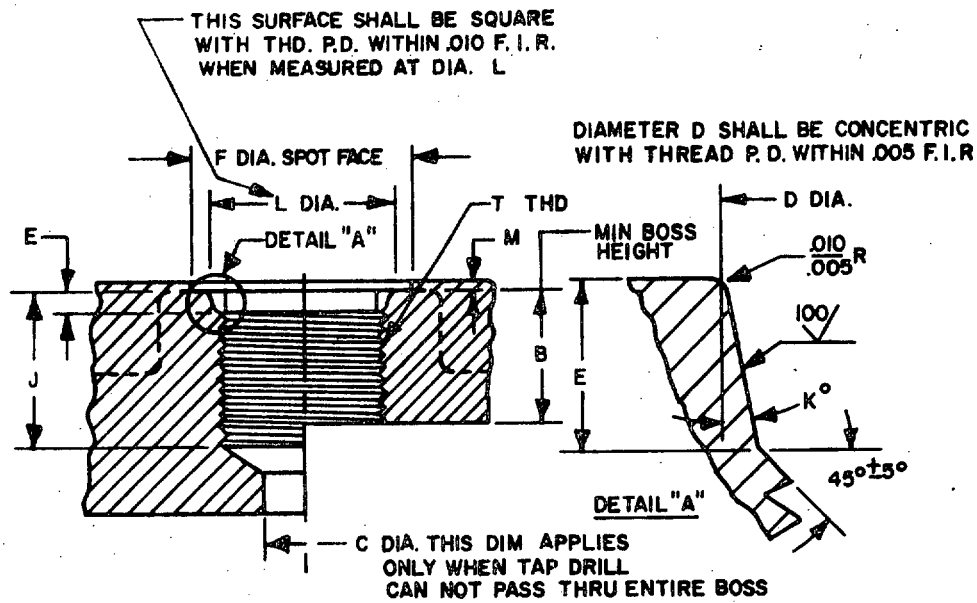

APPROVED 13 Aug 56 REVISED (A) 23 Apr 65 (B) 15 Jul 74 (C) 21 Jun 1979

This military standard is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

Ⓒ denotes change(s)

P. A. SH Other Cust	INTERNATIONAL INTEREST	TITLE: BOSS, GASKET SEAL STRAIGHT THREAD TUBE FITTING, STANDARD DIMENSIONS FOR	MILITARY STANDARD MS16142(SH)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:		Page 1 of 2

DD FORM 672-1 (LIMITED COORDINATION) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Project 4730-N065

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:53Z
Check the source to verify that this is the current version before use.

Tube outside diameter	Straight thread "T" Thread size	Pitch diameter Min.	Pitch diameter Max.	Minor diameter Min.	Minor diameter Max.	B Full thread depth min.
Inches						
1/8	5/16-24UNF-2B	0.2854	0.2902	0.267	0.277	0.390
3/16	3/8-24UNF-2B	.3479	.3528	.330	.340	.390
1/4	7/16-20UNF-2B	.4050	.4104	.383	.395	.454
5/16	1/2-20UNF-2B	.4675	.4731	.446	.457	.454
3/8	9/16-18UNF-2B	.5264	.5323	.502	.515	.500
1/2	3/4-16UNF-2B	.7094	.7159	.682	.696	.562
5/8	7/8-14UNF-2B	.8286	.8356	.798	.814	.656
3/4	1-1/16-12UN-2B	1.0084	1.0158	.972	.990	.750
7/8	1-3/16-12UN-2B	1.1334	1.1409	1.097	1.115	.750
1	1-5/16-12UN-2B	1.2584	1.2659	1.222	1.240	.750
1-1/4	1-5/8-12UN-2B	1.5709	1.5785	1.535	1.553	.750
1-1/2	1-7/8-12UN-2B	1.8209	1.8287	1.785	1.803	.750
2	2-1/2-12UN-2B	2.4459	2.4540	2.410	2.428	.750

C Minimum diameter	D +0.005 - .000	E +0.015 - .000	F © Minimum diameter see note 1	J Minimum	K ±1 degree	L Minimum diameter	M © See note 1
					Degrees		
0.062	0.358	0.074	0.672	0.468	12	0.438	0.062
.125	.421	.074	.750	.468	12	.500	.062
.172	.487	.093	.828	.547	12	.563	.062
.234	.550	.093	.906	.547	12	.625	.062
.297	.616	.097	.969	.609	12	.688	.062
.391	.811	.100	1.188	.688	15	.875	.094
.484	.942	.100	1.344	.781	15	1.000	.094
.609	1.148	.130	1.625	.906	15	1.250	.094
.719	1.273	.130	1.765	.906	15	1.375	.094
.844	1.398	.130	1.910	.906	15	1.500	.125
1.078	1.713	.132	2.270	.906	15	1.875	.125
1.312	1.962	.132	2.560	.906	15	2.125	.125
1.781	2.587	.132	3.480	.906	15	2.750	.125

NOTE:
1. If face of boss is a machined surface, dimensions F and M need not apply.

APPROVED 13 Aug 56 REVISED © For change(s) see page 2

This military standard is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

P. A. SH Other Cust	INTERNATIONAL INTEREST	TITLE BOSS, GASKET SEAL STRAIGHT THREAD TUBE FITTING, STANDARD DIMENSIONS FOR	MILITARY STANDARD MS16142(SH)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:		Page 2 of 2

☆U.S. GOVERNMENT PRINTING OFFICE: 1981 — 703-023/7641

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:53Z
Check the source to verify that this is the current version before use.