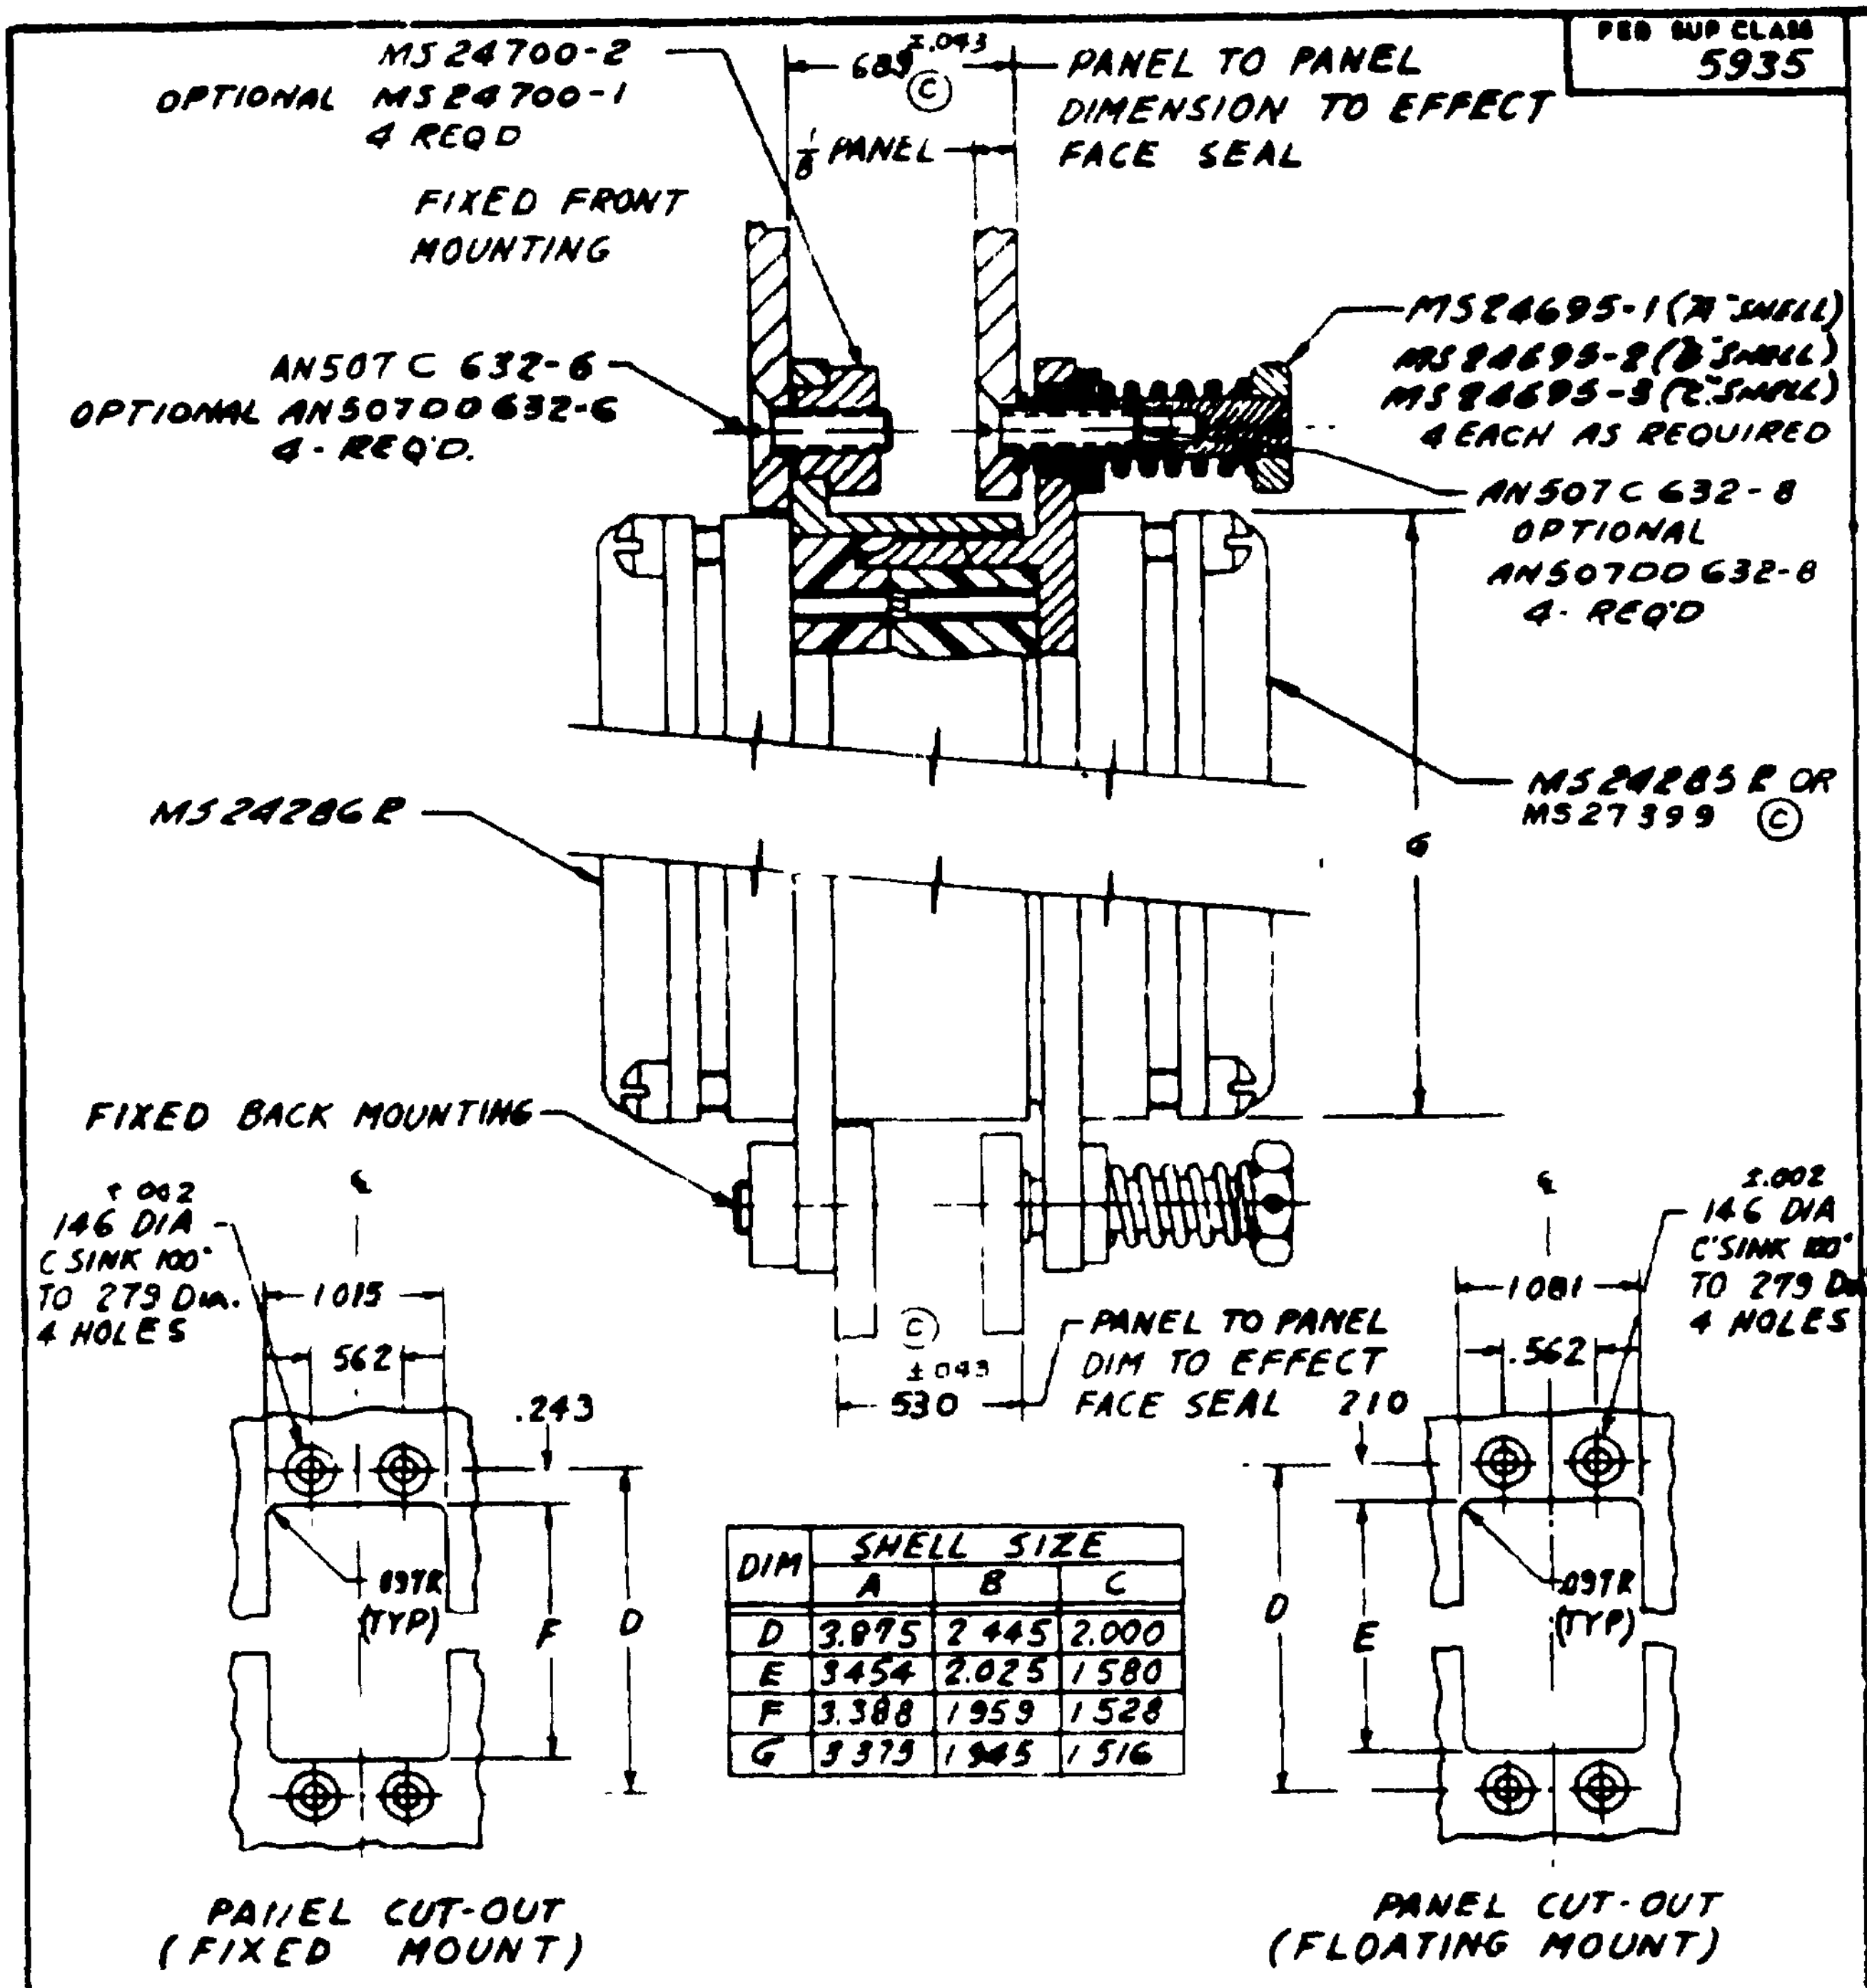
MS24700-2
OPTIONAL MS24700-1
4 REQD
.685 ±.043 ©
PANEL TO PANEL DIMENSION TO EFFECT FACE SEAL
1/8 PANEL
FIXED FRONT MOUNTING
AN507C 632-6
OPTIONAL AN507DD 632-6
4-REQ'D.
MS24695-1 (A SHELL)
MS24695-2 (B SHELL)
MS24695-3 (C SHELL)
4 EACH AS REQUIRED
AN507C 632-8
OPTIONAL
AN507DD 632-8
4-REQ'D
MS24285R OR
MS27399 ©
MS24286R
G
FIXED BACK MOUNTING
©
±.043
.530
PANEL TO PANEL DIM TO EFFECT FACE SEAL
±.002
.146 DIA
C'SINK 100°
TO .279 DIA.
4 HOLES
1.015
.562
.243
.097R
(TYP)
F
D
PANEL CUT-OUT
(FIXED MOUNT)
±.002
.146 DIA
C'SINK 100°
TO .279 DIA
4 HOLES
1.081
.562
.210
D
E
.097R
(TYP)
PANEL CUT-OUT
(FLOATING MOUNT)

DIM	SHELL SIZE		
	A	B	C
D	3.875	2.445	2.000
E	3.454	2.025	1.580
F	3.388	1.959	1.528
G	3.375	1.945	1.516

THIS IS A DESIGN STANDARD NOT TO BE USED AS PART NUMBER

DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS ± 1/64. DECIMALS ±.005.

© MATING AND MOUNTING DETAILS OF MS24285R, MS24286R AND MS27599 CONNECTORS FOR SERVICE OR TEST

REFERENCED DOCUMENTS SHALL BE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID

© FOR CHANGES SEE SHEET 1 & 2

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN

APPROVED 13 Oct 60
REVISED Ⓐ 16 JAN 1961 Ⓑ 7 MAR 1962 Ⓒ 15 JUN 1965

[illegible]

P.A. Other Cust USAF-11	TITLE MATED ASSEMBLY, CONNECTOR RACK AND PANEL, MINIATURE	MILITARY STANDARD MS24287 (USAF)

Source: https://assist.dla.mil -- Downloaded: 2024-10-23T14:51Z
Check the source to verify that this is the current version before use.

FSC CLASS 5935

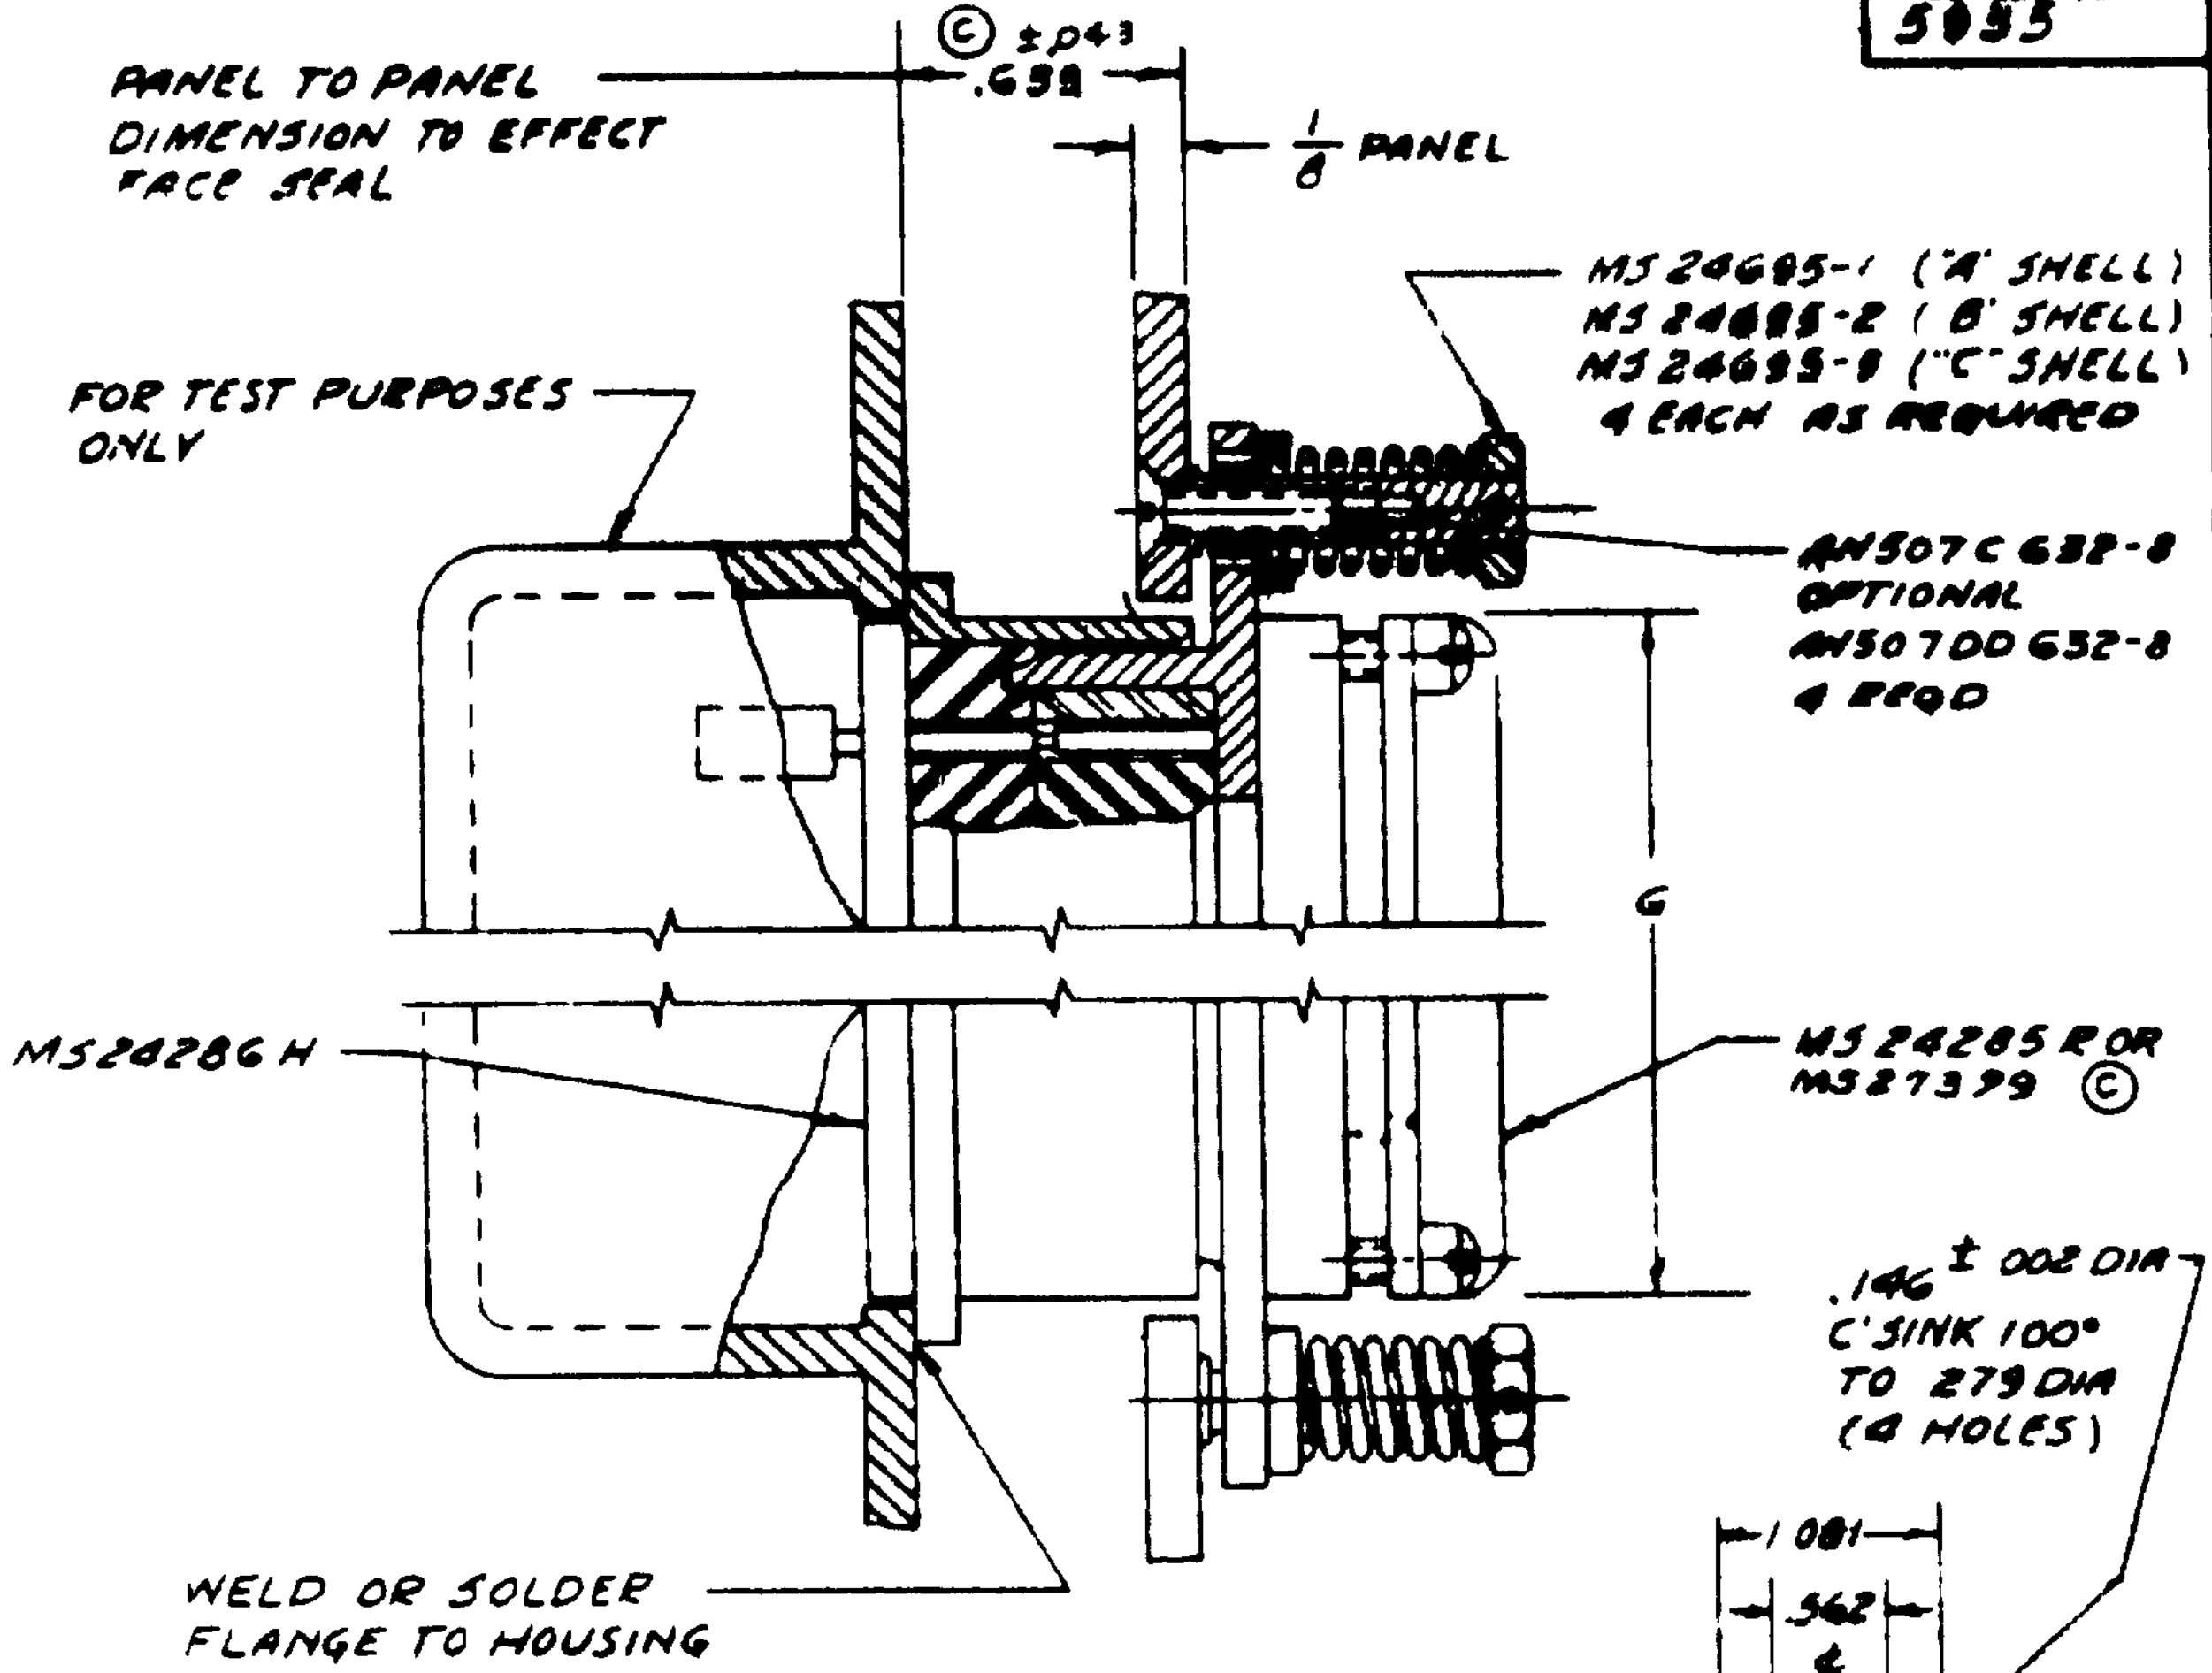
PANEL TO PANEL DIMENSION TO EFFECT FACE SEAL
ⓒ ±.043
.659
1/8 PANEL
MS 24695-1 ("A" SHELL)
MS 24695-2 ("B" SHELL)
MS 24695-3 ("C" SHELL)
4 EACH AS REQUIRED
FOR TEST PURPOSES ONLY
AN507C632-8 OPTIONAL
AN507DD632-8
4 REQD
G
MS24286H
MS24285R OR MS27399 ⓒ
.146 ± .002 DIA C'SINK 100° TO .279 DIA (4 HOLES)
WELD OR SOLDER FLANGE TO HOUSING
1.081
.562

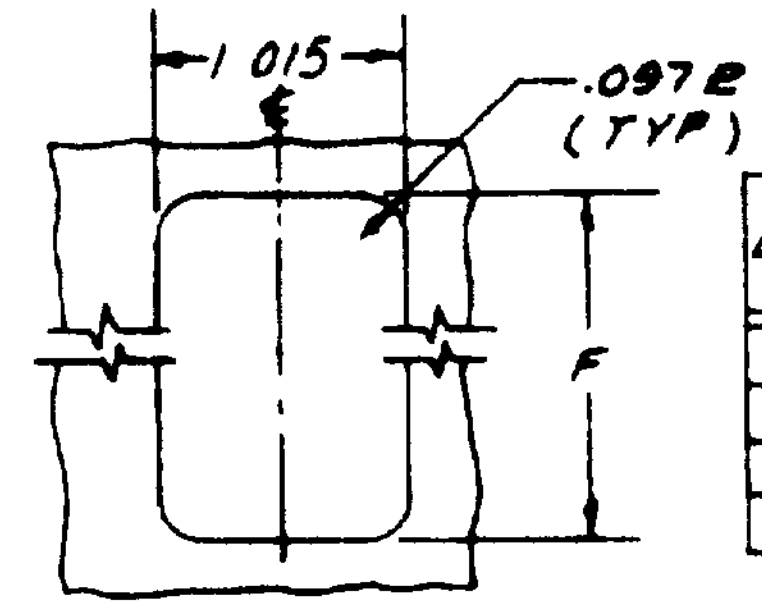
1.015
℄
.097 R (TYP)
F

PANEL CUT-OUT
(FOR CLASS H CONNECTORS)

DIM	SHELL SIZE		
	A	B	C
D	2.875	2.445	2.000
E	3.454	2.025	1.580
F	3.388	1.959	1.528
G	3.375	1.945	1.516

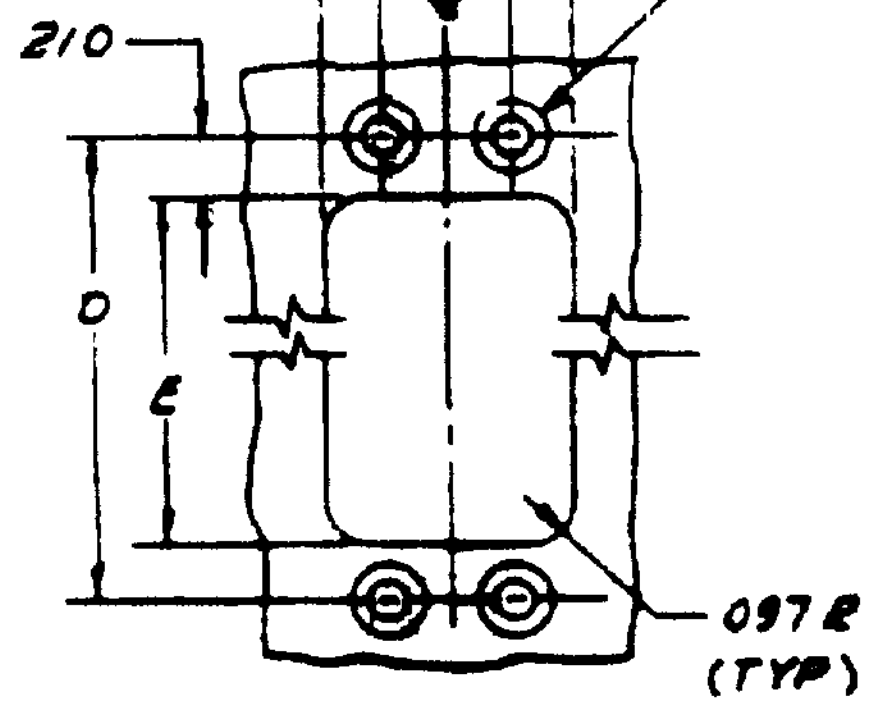
.210
℄
D
E
.097 R (TYP)

PANEL CUT-OUT
(FOR CLASS "R" CONNECTORS)
FLOATING MOUNT

THIS IS A DESIGN STANDARD. NOT TO BE USED AS A PART NUMBER.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES:
FRACTIONS ± 1/64, DECIMALS ± .005 ⓒ
MATING AND MOUNTING DETAILS OF MS24285R, MS24286H AND MS27399 CONNECTORS FOR SERVICE OR TEST.
REFERENCED DOCUMENTS SHALL BE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS
THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.

APPROVED

REVISED Ⓐ FOR CHANGES SEE SHEET 1 Ⓑ 7 MAR 62 ⓒ FOR CHANGES SEE SHEETS 1 AND 2

P.A. USAF-11 Other Cust	TITLE MATED ASSEMBLY, CONNECTOR RACK AND PANEL, MINIATURE	MILITARY STANDARD MS24287 (USAF)
PROCUREMENT SPECIFICATION MIL-C-26518	SUPERSEDES	SHEET 2 OF

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:51Z
Check the source to verify that this is the current version before use.