
FED. SUP CLASS
4730

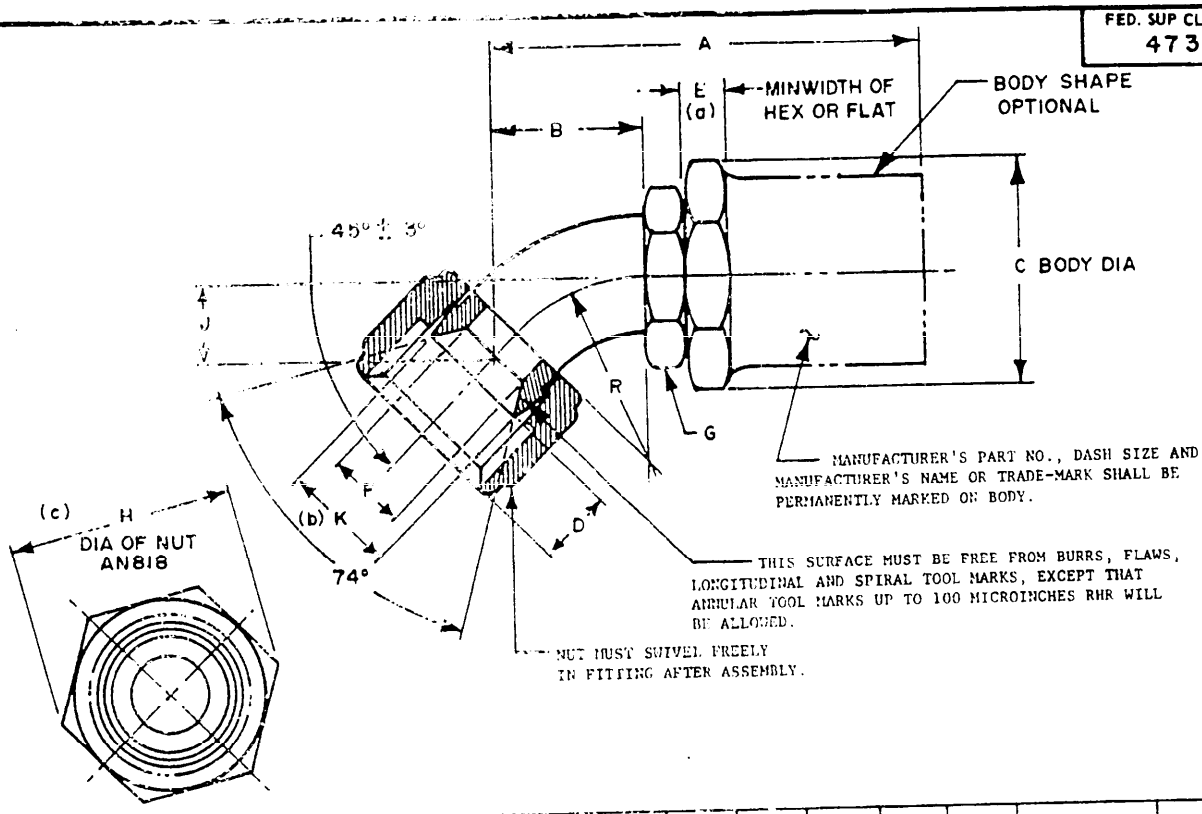

DASH NO.	HOSE ID REF	TUBING OD	(c) NUT	A MAX	B MAX	C MAX	D		(a) E MIN	F MIN	G MIN NIPPLE HEX ACROSS FLATS	H REF	J MAX	K DIA		R ±.031	WT MAX LB
- 4	7/32	1/4	AN818- 4	2.875	.578	.875	.375	±.015	.188	.146	.563	.649	.388	.295	±.010	.375	.13
- 5	9/32	5/16	AN818- 5		.656	.937				.177	.625	.721	.450	.355		.437	.14
- 6	11/32	3/8	AN818- 6	3.000	.719	1.160				.271	.688	.794	.480	.435		.500	.16
- 8	7/16	1/2	AN818- 8	3.125	.734	1.375	.438		.250	.365	.875	1.010	.490	.570			.25
-10	9/16	5/8	AN818-10	3.312	.859	1.550	.515	±.031	.312	.455	1.000	1.155	.562	.680		.625	.38
-12	11/16	3/4	AN818-12	4.000	1.328	1.740	.562		.375	.568	1.250	1.443	.781	.850		1.250	.51
-16	7/8	1	AN818-16	4.750	1.500	2.000	.620			.778	1.500	1.732	.844	1.103	±.015	1.500	.76

(a) HEX OR FLATS SHALL FIT STANDARD WRENCH OPENINGS.
(b) DIMENSIONS "F" OF CONICAL SEAT TO BE CONCENTRIC WITH OD OF NIPPLE WITHIN .005 TIR THROUGH SIZE -6; .010 TIR SIZE -8 AND ABOVE.
(c) A NON-STANDARD SWIVEL NUT MAY BE USED, PROVIDED THE HEX AND THREAD DIMENSIONS ARE IN ACCORDANCE WITH AN818, AND PROVIDED THE NUT CANNOT BE REMOVED FROM ASSEMBLY.

(D) MATERIAL: NIPPLES, NUTS AND ELBOW, STEEL: BODY, ALUMINUM, MIL-F-8789. AS AN ALTERNATE, THE ELBOW MAY BE FABRICATED FROM TUBING. TUBING SHALL BE STEEL AS SPECIFIED IN AMS 5050 OR AMS 5053 AND JOINTS MAY BE WELDED, MIL-STD-1595, OR COPPER HYDROGEN BRAZED IN ACCORDANCE WITH MIL-B-7883, EXCEPT AS MODIFIED BY THE PROCUREMENT SPECIFICATION.

FINISH: ALUMINUM ALLOY, ANODIC TREATMENT, MIL-A-8625, TYPE II, STEEL, CADMIUM PLATE, QQ-P-416, TYPE II, CLASS 3; COLOR, BLACK.

(D) MS PART NO. SHALL BE MARKED ON A PERMANENT TAG SECURELY ATTACHED TO END FITTING ASSEMBLY.

A TRUE CIRCULAR CROSS SECTION IS NOT REQUIRED WITHIN ANGLE OF BEND, HOWEVER, A BALL .031 SMALLER THAN "F" DIA MUST PASS THROUGH THE ENTIRE FITTING.

THESE FITTINGS FOR USE WITH HOSE, MIL-H-8788.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES. DECIMALS ±.005, ANGLES ±1°.

CLEARANCE SHALL BE ALLOWED FOR MAX DIMENSIONS SHOWN ON THIS STANDARD FOR INSTALLATION.

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE ON DATE OF INVITATIONS FOR BID.

APPROVED 17 DEC 58 REVISED (D) 6 AUG 82

P. A.	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
AIR FORCE-99 Other Cust (D) NAVY-AS AIR FORCE-99		ELBOW, 45° FLARED TUBE TO HOSE ATTACHABLE, HYDRAULIC (3000 PSI)	MS28780
PROCUREMENT SPECIFICATION MIL-F-8789	SUPERSEDES:		SHEET 1 OF 1

DD FORM 1 MAY 73 672-1 (COORDINATED)

Project No. 4730-F324

USER ACTIVITIES

REVIEWER ACTIVITIES DLA-CS

This military standard is approved for use by all Departments and Agencies of the Department of Defense Selection for all new engineering and design applications and for repetitive use shall be made from this document

Source: https://assist.dla.mil -- Downloaded: 2026-02-23 16:59Z
Check the source to verify that this is the current version before use.