
FED. SUP CLASS
1650

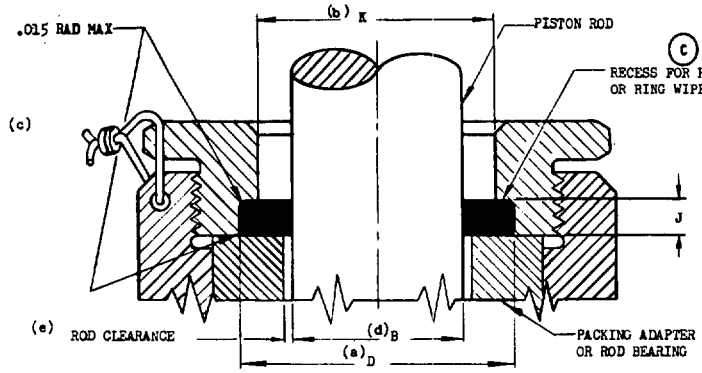

MS28776 SCRAPER DASH NO.	(d) B ROD DIAMETER NOMINAL	(d) B ROD DIAMETER +.000 -.002	SCRAPER RECESS (a) D MAJOR DIA +.004 -.000	SCRAPER RECESS J DEPTH +.005 -.000	SCRAPER RECESS (b) K MINOR DIA +.005 -.000
1	1/2	.498	.760		.647
2	9/16	.560	.823		.710
3	5/8	.623	.885		.772
4	11/16	.685	.948		.834
5	3/4	.748	1.010		.897
6	13/16	.810	1.086		.949
7	7/8	.873	1.148		1.012
8	15/16	.935	1.210		1.074
9	1	.998	1.273		1.136
10	1-1/16	1.060	1.335		1.199
11	1-1/8	1.123	1.398		1.262
12	1-3/16	1.185	1.460		1.324
13	1-1/4	1.248	1.523	.104	1.386
14	1-5/16	1.310	1.614		1.480
15	1-3/8	1.373	1.677		1.542
16	1-7/16	1.435	1.739		1.605
17	1-1/2	1.498	1.802		1.668
18	1-5/8	1.623	1.927		1.793
19	1-3/4	1.748	2.052		1.918
20	1-7/8	1.873	2.177		2.043
21	2	1.998	2.302		2.178
22	2-1/8	2.123	2.427		2.303
23	2-1/4	2.248	2.552		2.428
24	2-3/8	2.373	2.677		2.553
25	2-1/2	2.498	2.802		2.678
26	2-5/8	2.623	2.989		2.834
27	2-3/4	2.748	3.114		2.959
28	2-7/8	2.873	3.239		3.084
29	3	2.997	3.364		3.209
30	3-1/8	3.122	3.489		3.334
31	3-1/4	3.247	3.614	.119	3.459
32	3-3/8	3.372	3.729		3.584
33	3-1/2	3.497	3.864		3.709
34	3-5/8	3.622	3.989		3.834
35	3-3/4	3.747	4.114		3.959
36	3-7/8	3.872	4.239		4.084
37	4	3.997	4.427	.135	4.240
38	4-1/8	4.122	4.552		4.365
39	4-1/4	4.247	4.677		4.490
40	4-3/8	4.372	4.802		4.615

MS28776 SCHAPER DASH NO.	(d) B ROD DIAMETER NOMINAL	(d) B ROD DIAMETER +.000 -.003	SCRAPER RECESS (a) D MAJOR DIA +.005 -.000	SCRAPER RECESS J DEPTH +.005 -.000	SCRAPER RECESS (b) K MINOR DIA +.005 -.000
41	4-1/2	4.497	4.927		4.740
42	4-5/8	4.622	5.052		4.865
43	4-3/4	4.747	5.177		4.990
44	4-7/8	4.872	5.302		5.115
45	5	4.997	5.427	.135	5.240
46	5-1/8	5.122	5.552		5.365
47	5-1/4	5.247	5.677		5.490
48	5-3/8	5.372	5.802		5.615
49	5-1/2	5.497	5.927		5.740
50	5-5/8	5.622	6.114		5.896
51	5-3/4	5.747	6.239		6.022
52	5-7/8	5.872	6.364		6.146
53	6	5.997	6.489		6.272
54	6-1/4	6.247	6.739		6.522
55	6-1/2	6.497	6.989		6.772
56	6-3/4	6.747	7.239		7.022
57	7	6.997	7.489		7.272
58	7-1/4	7.247	7.739	.151	7.552
59	7-1/2	7.497	7.989		7.772
60	7-3/4	7.747	8.239		8.022
61	8	7.997	8.489		8.272
62	8-1/2	8.497	8.989		8.772
63	9	8.997	9.489		9.272
64	9-1/2	9.497	9.989		9.772
65	10	9.997	10.489		10.272
66	10-1/2	10.497	10.989		10.772
67	11	10.997	11.489		11.272
68	11-1/2	11.497	11.989		11.772
69	12	11.997	12.489		12.272
70	12-1/2	12.497	12.989	.166	12.272
71	13	12.997	13.489		13.272
	13-1/2	13.497			
	14	13.997			
	14-1/2	14.497			
	15	14.997			
	15-1/2	15.497			

(a) MAJOR DIAMETER (D) TO BE CONCENTRIC WITH ROD BUSHING BORE WITHIN .005 T.I.R.
(b) MINOR DIAMETER (K) TO BE CONCENTRIC WITH ROD BUSHING BORE WITHIN .010 T.I.R.
(c) RETENTION AND SAFETYING BY MEANS OF ANY APPROVED DEVICE.
(C) (d) ROD DIA FROM MIL-G-5514.
(C) (e) ROD CLEARANCE IN ACCORDANCE WITH MIL-G-5514

DIMENSIONS IN INCHES.

(C) MS28903 MAY BE USED IN SIZES -1 THRU -20 FOR WIPER RING APPLICATIONS.
THIS IS A DESIGN STANDARD. NOT TO BE USED AS A PART NUMBER.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

Reviewers:
Navy - AS
USAF - ASD(11), OCAMA(71)
Army - AV

APPROVED 3 May 57 REVISED (A) 20 Feb 62 (B) 21 Jan 64 (C) 13 Aug 71

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. USAF - 11 (C) Other Cust Army - AV Navy - AS	TITLE SCRAPER, INSTALLATION, PACKING GLAND RING	MILITARY STANDARD MS33675
PROCUREMENT SPECIFICATION NONE	SUPERSEDES: MS33675(ASG)	SHEET 1 OF 1

DD FORM 1 SEP 57 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

☆ U. S. GOVERNMENT PRINTING OFFICE: 1971-714-159/3093

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:07Z
Check the source to verify that this is the current version before use.