FED SUP CLASS
5305

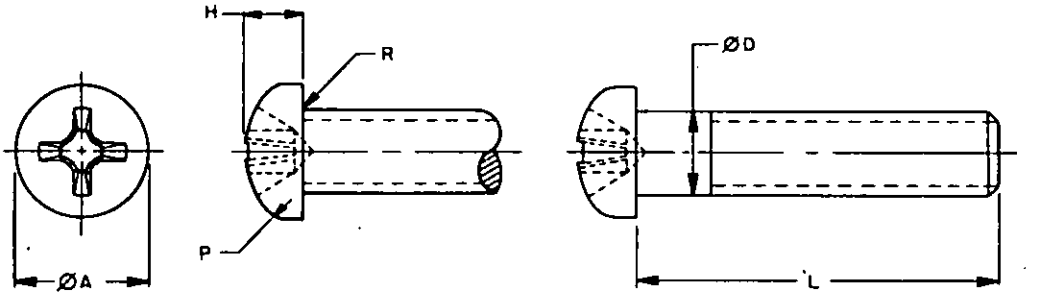


TABLE 1. DASH NUMBERS AND DIMENSIONS

			#2 .0860	#4 .1120	#6 .1380	#8 .1640	#10 .1900	1/4 .2500	5/16 .3125	3/8 .3750
ØD	NOMINAL SIZE									
	THREADS PER INCH (UNF-2A)		64	48	40	36	32	28	24	24
ØD	BODY	MAX	.0860	.1120	.1380	.1640	.1900	.2500	.3125	.3750
		MIN	.0733	.0954	.1184	.1424	.1658	.2225	.2806	.3430
ØA	HEAD	MAX	.167	.219	.270	.322	.373	.492	.615	.740
		MIN	.155	.205	.256	.306	.357	.473	.594	.716
H	HEAD HEIGHT	MAX	.062	.080	.097	.115	.133	.175	.218	.261
		MIN	.053	.070	.087	.105	.122	.162	.203	.244
P	HEAD RADIUS	MIN	.010	.010	.015	.015	.020	.035	.040	.040
R	FILLET RADIUS	MAX	.013	.017	.021	.025	.029	.038	.047	.056
	DRIVER SIZE		1	1	2	2	2	3	4	4
MINIMUM TENSILE STRENGTH LOAD (LBS)			215	360	550	810	1100	2000	3150	4800

L LENGTH	TOLERANCE	DASH NO	DASH NO	DASH NO	DASH NO	DASH NO	DASH NO	DASH NO	DASH NO
.12		1	10	21	36				
.19		2	11	22	37				
.25		3	12	23	38	51			
.31		4	13	24	39	52	66		
.38	+.00 -.03	5	14	25	40	53	67	80	
.44		6	15	26	41	54	68	81	
.50		7	16	27	42	55	69	82	93
.62		8	17	28	43	56	70	83	94
.75		9	18	29	44	57	71	84	95
.88			19	30	45	58	72	85	96
1.00			20	31	46	59	73	86	97
1.25				32	47	60	74	87	98
1.50	+.00 -.06			33	48	61	75	88	99
1.75				34	49	62	76	89	100
2.00				35	50	63	77	90	101
2.25						64	78	91	102
2.50	+.00 -.09					65	79	92	103
2.75									104
3.00									105

USER ACTIVITIES:
ARMY-AT,CR,ME
NAVY-MC,SH
NSA-NS

REVIEWER ACTIVITIES:
ARMY-AV,EA
DLA-IS

APPROVED 25 JUN 53 REVISED © 31 DEC 87

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

AMSC N/A

©ENTIRE STANDARD REVISED

P.A.	INTERNATIONAL INTEREST	TITLE	
ARMY-AR		SCREW,MACHINE-PAN HEAD, CROSS-RECESSED, BRASS,UNF-2A	MILITARY STANDARD
Other Cust NAVY-YD AIR FORCE-82			MS35215
PROCUREMENT SPECIFICATION FF-S-92	SUPERSEDES: MS35213,MS35230,MS35232 AND IN PART: MS35357, MS35359 THRU MS35362,MS35364 THRU MS35366 AND AN520		PAGE 1 OF 3

DD FORM 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5305-1630

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:11Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. MATERIAL: BRASS IN ACCORDANCE WITH QQ-B-613, QQ-B-626 OR QQ-W-321. THE MINIMUM ULTIMATE TENSILE STRENGTH SHALL BE 55,000 PSI.

2. PROTECTIVE COATING: BLACK CHEMICAL FINISH IN ACCORDANCE WITH MIL-F-495. CADMIUM PLATE IN ACCORDANCE WITH QQ-P-416, TYPE II, CLASS 3. (WHEN CADMIUM IS REQUIRED, A "C" SHALL FOLLOW THE DASH NUMBER).


3. THREADS: THE THREADS SHALL BE IN ACCORDANCE WITH SCREW-THREAD STANDARDS FOR FEDERAL SERVICES FED-STD-H28.

4. THREAD LENGTH: FULL FORM THREADS SHALL EXTEND TO WITHIN 2 THREADS OR LESS OF HEAD BEARING SURFACE FOR LENGTHS THRU 2.00 INCHES. LONGER LENGTHS SHALL HAVE A MINIMUM FULL FORM THREAD LENGTH OF 1.50 INCHES.

5. RECESS: THE RECESS SHALL BE IN ACCORDANCE WITH MS9006.


6. PART NUMBER: THE PART NUMBER SHALL CONSIST OF THE BASIC MS SHEET NUMBER, FOLLOWED BY A DASH NUMBER FROM TABLE I AND A CODE LETTER "C" FOR CADMIUM PLATE, IF APPLICABLE.

EXAMPLE: MS35215-1



MS35215-1 INDICATES - SCREW, MACHINE-PAN HEAD, CROSS RECESSED, BRASS, BLACK CHEMICAL FINISH, .0860-64 UNF-2A NOMINAL THREAD SIZE; .125 THREAD LENGTH.

MS35215-1C



MS35215-1C INDICATES - SCREW, MACHINE-PAN HEAD, CROSS RECESSED, BRASS, CADMIUM PLATE, .0860-64 UNF-2A NOMINAL THREAD SIZE; .125 THREAD LENGTH.

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.

2. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.

3. REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DoDISS) SPECIFIED IN THE SOLICITATION, FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.

APPROVED 25 JUN 53 REVISED (C) FOR CHANGES SEE PAGES 1, 2 AND 3

USER ACTIVITIES:
ARMY-AT,CR,ME
NAVY-MC,SH
NSA-NS

REVIEWER ACTIVITIES:
ARMY-AV,EA
DLA-IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:11Z
Check the source to verify that this is the current version before use.

FED. SUP. CLASS 5305

SCREWS COVERED BY DASH NUMBERS GIVEN IN MS35213, MS35230, MS35232 AND AN520 IN PART ARE CANCELED AFTER 17 DECEMBER 1962. THE CANCELED SCREWS CANNOT ALWAYS BE REPLACED BY THE SUPERSEDING SCREWS AND SHOULD BE USED UNTIL EXISTING STOCKS ARE DEPLETED. USE ONLY THE SUPERSEDING SCREWS FOR NEW DESIGN AND ENGINEERING. REPLACEMENT SHALL BE IN ACCORDANCE WITH THIS TABLE AND AS FOLLOWS:

A. MS35213 SCREWS ARE SUPERSEDED BY MS35215 SCREWS HAVING THE SAME DASH NUMBERS.

B. AN520 DASH NUMBERS HAVING A "R" IN PLACE OF THE "-" ARE SUPERSEDED BY THE SAME MS35215 DASH NUMBERS AS THOSE WITH THE "-".

TABLE II. INTERCHANGEABILITY

DASH NUMBER			DASH NUMBER			DASH NUMBER		
CANCELED		SUPERSEDING	CANCELED		SUPERSEDING	CANCELED		SUPERSEDING
MS35230 MS35232	AN520	MS35215	MS35230 MS35232	AN520	MS35215	MS35230 MS35232	AN520	MS35215
	B0-2	1/		B6-26		75	B10-48	1/
	THRU	1/	37	B6-28	34	76		66
	B0-8	1/		B6-30	1/	77	B416-6	67
	B1-2	1/	38	B6-32	35	78	B416-7	68
	THRU	1/		B6-36	1/	79	B416-8	69
	B1-8	1/		B6-40	1/	80	B416-10	70
1		1	39		36	81	B416-12	71
2	B2-3	2	40		37	82	B416-14	72
3	B2-4	3	41	B8-4	38	83	B416-16	73
4	B2-5	4	42	B8-5	39		B416-18	1/
5	B2-6	5	43	B8-6	40	84	B416-20	74
6	B2-7	6	44	B8-7	41		B416-22	1/
						85	B416-24	75
7	B2-8	7	45	B8-8	42		B416-26	1/
8	B2-10	8	46	B8-10	43	86	B416-28	76
9	B2-12	9	47	B8-12	44		B416-30	1/
10	B3-3	1/	48	B8-14	45	87	B416-32	77
	THRU	1/	49	B8-16	46	88	B416-36	78
	B3-12	1/	50	B8-18	47			
						89	B416-40	79
11		10		B8-20	1/	90	B416-44	1/
12	B4-3	11	51	B8-22	48	91	B416-48	1/
13	B4-4	12		B8-24	1/	92		80
14	B4-5	13		B8-26	1/	93		81
15	B4-6	14	52	B8-28	49	94		82
16	B4-7	15		B8-30	1/			
						95		83
17	B4-8	16	53	B8-32	50	96		84
18	B4-10	17	54	B8-36	1/	97		85
19	B4-12	18	55	B8-40	1/	98		86
20	B4-14	19	56	B8-44	1/	99		87
21	B4-16	20	57	B8-48	1/			
						100		88
22	B4-18	1/	58		1/	101		89
23	THRU	1/	59	B10-4	51	102		90
	B4-28	1/	60	B10-5	52	103		91
	B5-4	1/	61	B10-6	53	104		92
	THRU	1/	62	B10-7	54	105		1/
	B5-28	1/	63	B10-8	55			
						106		1/
24		21	64	B10-10	56	107		93
25		22	65	B10-12	57	108		94
26	B6-4	23	66	B10-14	58	109		95
27	B6-5	24	67	B10-16	59	110		96
28	B6-6	25		B10-18	1/			
						111		97
29	B6-7	26	68	B10-20	60	112		98
30	B6-8	27		B10-22	1/	113		99
31	B6-10	28	69	B10-24	61	114		100
32	B6-12	29		B10-26	1/	115		101
33	B6-14	30	70	B10-28	62			
						116		102
34	B6-16	31		B10-30	1/	117		103
	B6-18	1/	71	B10-32	63	118		104
35	B6-20	32	72	B10-36	64	119		105
	B6-22	1/	73	B10-40	65			
36	B6-24	33	74	B10-44	1/			

1/ NO REPLACEMENT

USER ACTIVITIES: ARMY-AT,CR,ME NAVY-MC,SH NSA-NS

REVIEWER ACTIVITIES: ARMY-AV,EA DLA-IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

APPROVED 25 JUN 53 REVISED © FOR CHANGES SEE PAGES 1,2 AND 3

P.A. ARMY-AR	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust NAVY-YD AIR FORCE-82		SCREW,MACHINE-PAN HEAD, CROSS-RECESSED, BRASS,UNF-2A	MS35215
PROCUREMENT SPECIFICATION FF-S-92	SUPERSEDES: MS35213,MS35230,MS35232 AND IN PART: MS35357, MS35359 THRU MS35362,MS35364 THRU MS35366 AND AN520		PAGE 3 OF 3

DD FORM 1 MAY 53 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5305-1630

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:11Z
Check the source to verify that this is the current version before use.