

FED. SUP CLASS
4820

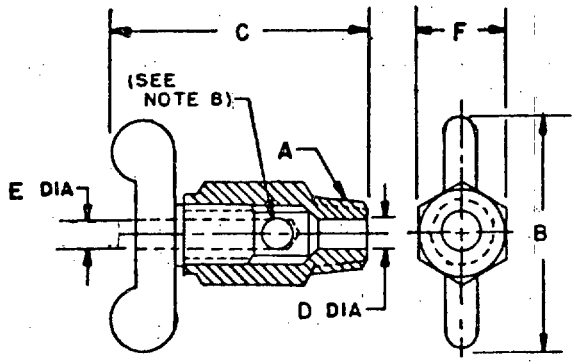

INTERNAL SEAT

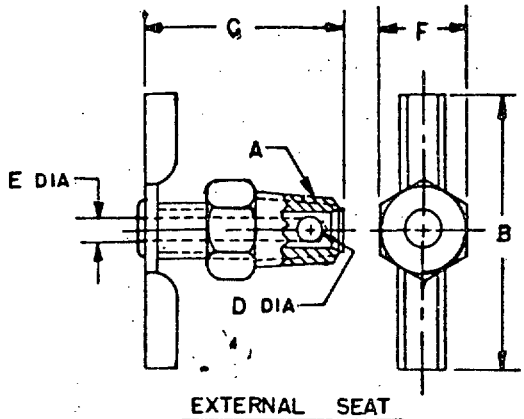

EXTERNAL SEAT

User activities:
Army - ER, GL, MI
Navy - MC

Review activities:
Army - AT, AV, ME
DLA - CS

TABLE I - INTERNAL SEAT

DASH NO.	A PIPE THREAD NPTF	B MAX	C OPEN MAX	D DIA MIN	E DIA MIN	F ±.015
1	1/8-27	1.38	1.88	.19	.12	.56 or .50
2	1/4-18	1.50	2.00	.19	.19	.62 or 56
3	3/8-18	1.50	2.00	.31	.31	.75 or .69

TABLE II - EXTERNAL SEAT

DASH NO.	A PIPE THREAD NPTF	B MAX	C CLOSED MAX	D DIA MIN	E DIA MIN	F ±.015
4	1/8-27	1.31	.90	.09	.12	.50 or .44
5	1/4-18	1.38	1.00	.16	.19	.56 or .50
6	3/8-18	1.69	1.44	.16	.19	.69 or .62
7	1/2-14	2.00	1.62	.31	.38	.88 or .81
8	1-11 1/2	2.50	2.31	.53	.75	1.38 or 1.50

NOTES:
1. MATERIAL: Brass, QQ-B-626, Alloy No. 268 or 360 or QQ-C-390, Alloy Number B5. Handle may be steel conforming to QQ-S-698, hot rolled or cold rolled.
2. PROTECTIVE COATING: Brass, None.
   Steel, Cadmium Plated in accordance with QQ-P-416, Type II, Class 3.
   Steel, Zinc Plated in accordance with QQ-Z-325, Type II, Class 3.
3. THREADS: Thread "A" shall be modified (Dryseal) taper pipe thread, NPTF in accordance with Screw-Thread Standards for Federal Services, Handbook H28, except that the effective thread length is shortened by one thread on the small end for dash numbers 1 thru 6.
4. DIMENSIONS: Unless otherwise specified all dimensions are in inches.
5. PART NUMBER: The MS part number consists of the MS number, plus the dash number.
   Example: MS35782-1.
6. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
7. Reference documents shall be of the issue in effect on date of invitations for bid.
8. The diameter of this hole is the same as E.
9. © This item is for use in non-flammable liquid or gas systems where pressure does not exceed 150 p.s.i. and the liquid or gas is compatible with brass.
10. The illustration is for identification purposes only and is not intended to restrict design or shapes not dimensioned.

This military standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 19 JULY 1956 REVISED (A) 13 OCT 1965 (B) 30 MAR 73 (C) 22 JUL 83

© FOR CHANGES SEE SHEETS 1 AND 2.

P.A. AR Other Cust SH 99	TITLE COCKS, DRAIN, CENTER DRAIN, 150 P.S.I.	MILITARY STANDARD MS 35782
PROCUREMENT SPECIFICATION MIL-C-1203	SUPERSEDES: AN771 and CDAX1 in part	SHEET 1 OF 2

Source: https://assist.dla.mil -- Downloaded: 2020-10-23T17:20Z
Check the source to verify that this is the current version before use.

User activities:
Army - ER, GL, MI
Navy - MC

Review activities:
Army - AT, AV, ME
DLA - CS

INTERCHANGEABILITY

After 13 October 1965 these AN part numbers are superseded by the specified MS part numbers. The replaced AN part numbers should be used until existing stock is depleted. For new design use only the superseding MS part numbers.

TABLE III

CANCELLED STANDARD AN771		SUPERSEDING STANDARD MS35782
PART NO.	PART NO.	PART NO.
AN771-1	AN771P1	MS35782-4
AN771-2	AN771P2	MS35782-5
AN771-3	AN771P3	MS35782-6
AN771-4	AN771P4	MS35782-7
AN771-8	AN771P8	MS35782-8

AN771P = Cadmium Plate

This military standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 19 JULY 1956 REVISED (A) FOR CHANGES SEE SHEETS 1 AND 2 (B) FOR CHANGES SEE SHEETS 1 AND 2 ©23 Mar 83

Source: https://assist.dla.mil -- Downloaded: 2020-10-23T17:28Z
Check the source to verify that this is the current version before use.