INCH-POUND

MS39212J
30 August 2012
SUPERSEDING
MS39212H
24 March 2008


DETAIL SPECIFICATION SHEET

SLEEVES, COMPRESSION, TUBE - HOSE FITTING- SAFETY SLEEVE TYPE

Inactive for new design after 29 December 1967. For new design, use SAE-J514.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet.

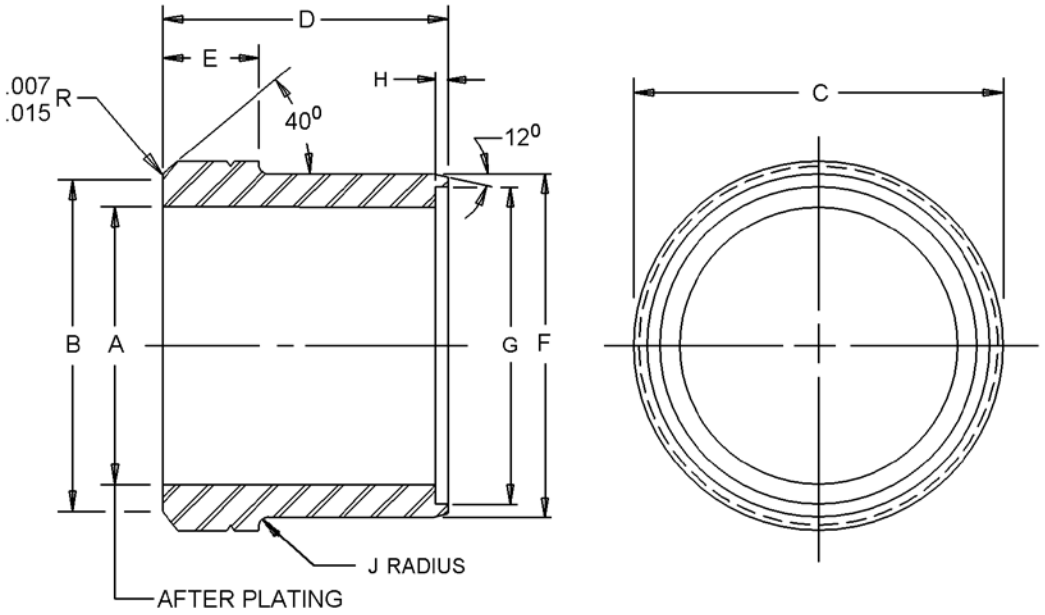

Inches	mm
.007	0.18
.015	0.38

FIGURE 1. Sleeves, compression, tube - hose fitting - safety sleeve type.

AMSC N/A

FSC 4730

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:48Z
Check the source to verify that this is the current version before use.

Dash number	Tube OD Inches (mm)	A dia. Inches (mm)	B dia. Inches (mm)	C Inches (mm)	D Inches (mm)
1	.125 (3.18)	.129 (3.28) .131 (3.33)	.160 (4.06) .150 (3.81)	.213 (5.41) .203 (5.16)	.281 (7.14) .275 (6.99)
2	.188 (4.78)	.190 (4.83) .193 (4.90)	.250 (6.35) .230 (5.84)	.322 (8.18) .312 (7.92)	.281 (7.14) .275 (6.99)
3	.250 (6.35)	.255 (6.48) .258 (6.55)	.316 (8.03) .296 (7.52)	.380 (9.65) .370 (9.40)	.339 (8.61) .333 (8.46)
4	.313 (7.95)	.318 (8.08) .321 (8.15)	.379 (9.63) .359 (9.12)	.448 (11.38) .438 (11.13)	.339 (8.61) .333 (8.46)
5	.375 (9.53)	.380 (9.65) .383 (9.73)	.441 (11.20) .421 (10.69)	.505 (12.83) .495 (12.57)	.378 (9.60) .372 (9.45)
6	.500 (12.70)	.506 (12.85) .509 (12.93)	.567 (14.40) .547 (13.89)	.635 (16.13) .625 (15.88)	.378 (9.60) .372 (9.45)
7	.625 (15.88)	.633 (16.08) .636 (16.15)	.694 (17.63) .674 (17.12)	.760 (19.30) .750 (19.05)	.418 (10.62) .412 (10.46)
8	.750 (19.05)	.758 (19.25) .761 (19.33)	.819 (20.80) .799 (20.29)	.885 (22.48) .875 (22.23)	.418 (10.62) .412 (10.46)
9	.875 (22.23)	.883 (22.43) .886 (22.50)	.944 (23.98) .924 (23.47)	1.010 (25.65) 1.000 (25.40)	.418 (10.62) .412 (10.46)
10	1.000 (25.40)	1.008 (25.60) 1.011 (25.68)	1.069 (27.15) 1.049 (26.64)	1.135 (28.83) 1.125 (28.58)	.418 (10.62) .412 (10.46)
11	1.250 (31.75)	1.261 (32.03) 1.264 (32.11)	1.322 (33.58) 1.302 (33.07)	1.416 (35.97) 1.406 (35.71)	.418 (10.62) .412 (10.46)
12	1.500 (38.10)	1.511 (38.38) 1.514 (38.46)	1.572 (39.93) 1.552 (39.42)	1.666 (42.32) 1.656 (42.06)	.418 (10.62) .412 (10.46)

FIGURE 1. Sleeves, compression, tube - hose fitting - safety sleeve type - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:48Z
Check the source to verify that this is the current version before use.

Dash number	E Inches (mm)	F dia. Inches (mm)	G dia. Inches (mm)	H Inches (mm)	J radius Inches (mm)
1	.084 (2.13) .078 (1.98)	.178 (4.52) .175 (4.45)	.140 (3.56)	.015 (0.38) .023 (0.58)	.010 (.25)
2	.084 (2.13) .078 (1.98)	.256 (6.50) .252 (6.40)	.205 (5.21)	.020 (0.51) .028 (0.71)	.020 (0.51)
3	.102 (2.59) .096 (2.44)	.338 (8.59) .334 (8.48)	.268 (6.81)	.024 (0.61) .038 (0.97)	.020 (0.51)
4	.102 (2.59) .096 (2.44)	.400 (10.16) .396 (10.06)	.330 (8.38)	.024 (0.61) .038 (0.97)	.020 (0.51)
5	.122 (3.10) .116 (2.95)	.461 (11.71) .457 (11.61)	.393 (9.98)	.024 (0.61) .038 (0.97)	.020 (0.51)
6	.122 (3.10) .116 (2.95)	.589 (14.96) .585 (14.86)	.521 (13.23)	.024 (0.61) .038 (0.97)	.020 (0.51)
7	.122 (3.10) .116 (2.95)	.715 (18.16) .711 (18.06)	.647 (16.43)	.024 (0.61) .038 (0.97)	.020 (0.51)
8	.122 (3.10) .116 (2.95)	.840 (21.34) .836 (21.23)	.772 (19.61)	.024 (0.61) .038 (0.97)	.020 (0.51)
9	.122 (3.10) .116 (2.95)	.965 (24.51) .961 (24.41)	.897 (22.78)	.024 (0.61) .038 (0.97)	.020 (0.51)
10	.122 (3.10) .116 (2.95)	1.090 (27.69) 1.086 (27.58)	1.022 (25.96)	.024 (0.61) .038 (0.97)	.020 (0.51)
11	.122 (3.10) .116 (2.95)	1.344 (34.14) 1.340 (34.04)	1.275 (32.39)	.024 (0.61) .038 (0.97)	.020 (0.51)
12	.122 (3.10) .116 (2.95)	1.593 (40.46) 1.589 (40.36)	1.524 (38.71)	.024 (0.61) .038 (0.97)	.020 (0.51)

NOTES:
1. Dimensions are in inches, unless otherwise specified.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerance for 3 place decimals is ± .005 inch (0.13 mm), tolerance for fractions is ± 1/64, tolerance for degrees is ± 2°.
4. This illustration is for identification and is not intended to restrict designs or shapes not dimensioned.

FIGURE 1. Sleeves, compression, tube - hose fitting - safety sleeve type - Continued.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Material: Carbon steel AISI-C1112, AISI-C1113, AISI-C1117, AISI-C1118 or AISI-C1137 in accordance with SAE AIR4127.

Finish: All plating's shown in table I shall be capable of meeting the 96 hour salt spray test in accordance with ASTM B117.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:48Z
Check the source to verify that this is the current version before use.

TABLE I. Material and finish designators.

Designator	Material	Finish
Blank	Steel	Cadmium plating in accordance with SAE-AMS-C-81562, type II, class 3 or SAE-AMS-QQ-P-416, type II, class 2.
G	Steel	Zinc plating with chromate conversion in accordance with ASTM B695, type II, class 5.
H	Steel	Zinc phosphate in accordance with MIL-DTL-16232, type Z, class 1 and shall be hexavalent chromium free.
J	Steel	Zinc plating with chromate conversion in accordance with ASTM B633; type VI, Fe/Zn 25
N	Steel	NAVAIR trivalent chromium pretreatment (TCP) in accordance with MIL-DTL-81706, type II, class 1a.
P	Steel	Zinc plating with colorless passivate in accordance with ASTM B633, type VI, Fe/Zn 5.
S	Corrosion resistant steel 1/	No additional finish. Passivation in accordance with SAE-AMS2700, type 6 or 7. 1/
V	Steel	Zinc nickel in accordance with SAE-AMS2417, type 1.

1/ Stainless steel of such hardness as to be capable of biting, fully annealed type 304 stainless steel tubing.

Part or Identifying Number (PIN) example:

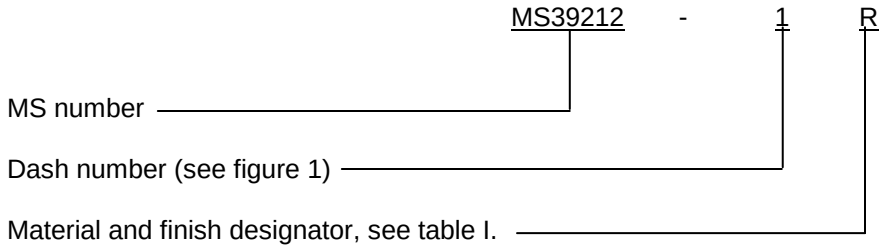

Guidance on use of alternative parts with less hazardous or non-hazardous materials. This specification provides an alternate material, corrosion resistant steel, and Zinc finish via the PIN. Users should select the PIN with the least hazardous material that meets the form, fit, and function requirements of their

For old designs that use compression sleeves, shall be done in accordance with MS39212. Table II shows supersession data to compression sleeves in accordance with SAE-J514. These replacements are for new design. Users are cautioned to evaluate replacements for their particular application.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:48Z
Check the source to verify that this is the current version before use.

TABLE II. Supersession data.

Inactive PIN Compression	Active SAE PIN 1/	Inactive PIN Compression	Active SAE PIN 2/
MS39212-1A	J514-2-080115ACQ	MS39212-1AP	J514-2-080115ACP
MS39212-2A	J514-3-080115ACQ	MS39212-2AP	J514-3-080115ACP
MS39212-3A	J514-4-080115ACQ	MS39212-3AP	J514-4-080115ACP
MS39212-4A	J514-5-080115ACQ	MS39212-4AP	J514-5-080115ACP
MS39212-5A	J514-6-080115ACQ	MS39212-5AP	J514-6-080115ACP
MS39212-6A	J514-8-080115ACQ	MS39212-6AP	J514-8-080115ACP
MS39212-7A	J514-10-080115ACQ	MS39212-7AP	J514-10-080115ACP
MS39212-8A	J514-12-080115ACQ	MS39212-8AP	J514-12-080115ACP
MS39212-9A	J514-14-080115ACQ	MS39212-9AP	J514-14-080115ACP
MS39212-10A	J514-16-080115ACQ	MS39212-10AP	J514-16-080115ACP
MS39212-11A	J514-20-080115ACQ	MS39212-11AP	J514-20-080115ACP
MS39212-12A	J514-24-080115ACQ	MS39212-12AP	J514-24-080115ACP

Inactive PIN Compression	Active SAE PIN 3/	Inactive PIN Compression	Active SAE PIN 4/
MS39212-1AJ or R	J514-2-080115ACZ	MS39212-1ASS	J514-2-080115AS
MS39212-2AJ or R	J514-3-080115ACZ	MS39212-2ASS	J514-3-080115AS
MS39212-3AJ or R	J514-4-080115ACZ	MS39212-3ASS	J514-4-080115AS
MS39212-4AJ or R	J514-5-080115ACZ	MS39212-4ASS	J514-5-080115AS
MS39212-5AJ or R	J514-6-080115ACZ	MS39212-5ASS	J514-6-080115AS
MS39212-6AJ or R	J514-8-080115ACZ	MS39212-6ASS	J514-8-080115AS
MS39212-7AJ or R	J514-10-080115ACZ	MS39212-7ASS	J514-10-080115AS
MS39212-8AJ or R	J514-12-080115ACZ	MS39212-8ASS	J514-12-080115AS
MS39212-9AJ or R	J514-14-080115ACZ	MS39212-9ASS	J514-14-080115AS
MS39212-10AJ or R	J514-16-080115ACZ	MS39212-10ASS	J514-16-080115AS
MS39212-11AJ or R	J514-20-080115ACZ	MS39212-11ASS	J514-20-080115AS
MS39212-12AJ or R	J514-24-080115ACZ	MS39212-12ASS	J514-24-080115AS

1/ Designator “C” is for steel, “Q” is for cadmium plating.
2/ Designator “C” is for steel, “P” is for zinc phosphate plating.
3/ Designator “C” is for steel, “Z” is for zinc plating.
4/ Designator “S” is for corrosion resistant steel.

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Referenced documents. This document references the following:

MIL-DTL-16232
MIL-DTL-81706
ASTM B117
ASTM B633
ASTM B695
SAE-AMS-C-81562
SAE-AMS2417
SAE-AMS2700
SAE AIR4127
SAE-AMS-QQ-P-416
SAE-J514

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:48Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - AT
Navy – SH
Air Force - 99
DLA - CC

Preparing activity:
DLA - CC

(Project 4730-2012-042)

Review activities:
Army - AR
Navy - AS, MC, SA
Air Force- 71

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.
.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:48Z
Check the source to verify that this is the current version before use.