


M20

FED. SUP CLASS
2330

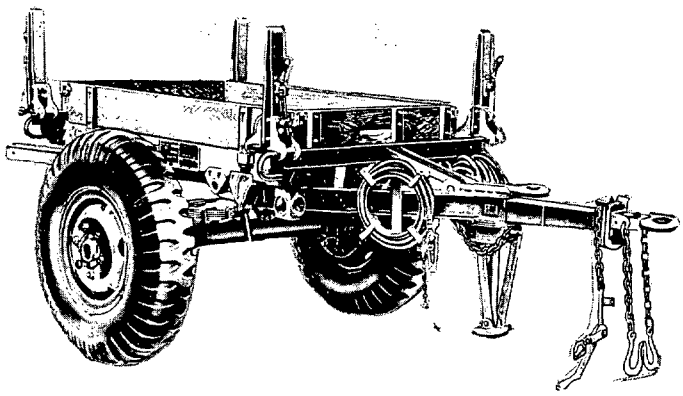

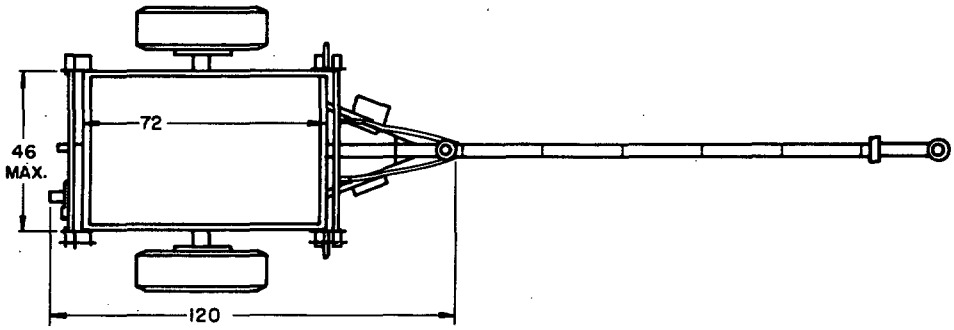


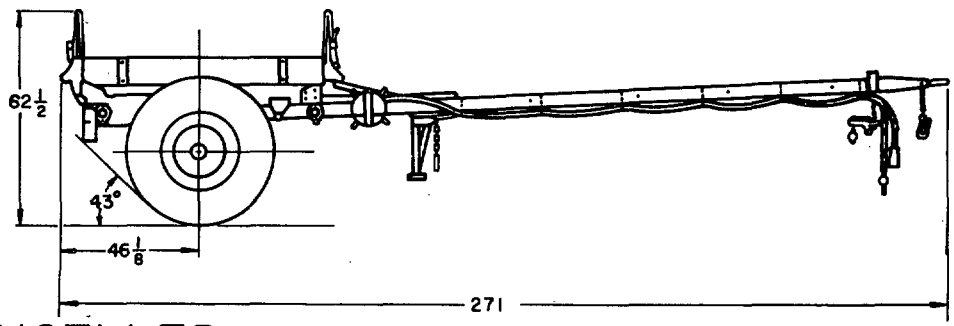

Ⓐ

CANCELLED AFTER 8 MAY 1972

USE MIL-T-62073 (M796)

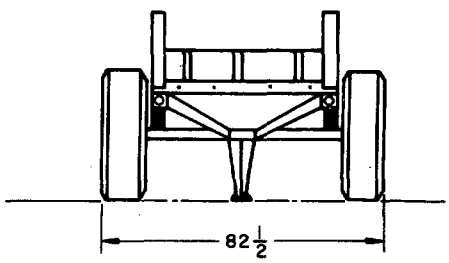

REVIEW ACTIVITIES: ARMY-EL
USER ACTIVITIES: NAVY-YD, MC; AF-11

APPROVED 1 AUGUST 1966 REVISED Ⓐ 8 MAY 1972

This military standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.

MS PART NO.	ENGINEERING PARTS LIST
MS500064-1	8342167

P.A. ARMY-AT Other Cust AF-84	TITLE TRAILER, BOLSTER: POLE HAULING, 3-1/2 TON, 2 WHEEL, M271	MILITARY STANDARD MS 500064
PROCUREMENT SPECIFICATION MIL-T-13714	SUPERSEDES:	SHEET 1 OF 2

DD FORM 1 SEP 57 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:46Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
2330

VEHICLE CHARACTERISTICS

CURB WEIGHT: 2430 LBS.

WEIGHT DISTRIBUTION:

	NO LOAD		HIGHWAY-CROSS COUNTRY
	TELESCOPED	EXTENDED	EXTENDED
LUNETTE EYE	141	180	930
AXLE	2199	2250	8500
LANDING GEAR	230	615	3176
AXLE	2200 LBS.	1815 LBS.	6254 LBS.

MAXIMUM WEIGHT: 7000 LBS., INCLUDING BODY AND PAYLOAD, WITH PAYLOAD EVENLY DISTRIBUTED, CROSS COUNTRY AND HIGHWAY

LUNETTE	930
AXLE	8500
TOTAL	9430 LBS.

(REFERENCED WEIGHTS ARE FOR INFORMATION ONLY.)

GENERAL:
THE M271 TRAILER IS DESIGNED TO CARRY LARGE POLES AND CARGO ON HIGHWAYS AND CROSS COUNTRY. IT IS EQUIPPED WITH AN EXTENSION TONGUE, ADJUSTABLE TO TWO POSITIONS. THE ENTIRE LOAD OF POLES IS HELD IN POSITION BY THE WINCH OPERATED CABLE. THE FRAME OF THE TRAILER TOGETHER WITH THE FRONT AND REAR BOLSTERS FORM THE BODY OF THE TRAILER.

LUNETTE: COUPLER-DRAWBAR, RING, 2, PART NO. 8342075

TONGUE ASS'Y.: PART NO. 8342193

FRONT SUPPORT LEG: PART NO. 8342058

FRAME ASS'Y.: PART NO. 8342198

STANCHION: ASS'Y.: 4, PART NO. 8342151

REEL ASS'Y.: LH, PART NO. 8342173
RH, PART NO. 8342176

ELECTRICAL SYSTEM: INST'N. DWG. NO. 8342213
POTENTIAL: 24 VOLTS
STOPLIGHT-TAILLIGHT, VEHICULAR: RH. AND LH., MS 51329-1
STOPLIGHT-VEHICULAR: BLACKOUT: 1, MS 51302-1

REFLECTORS: 4, RED, MS 35387-1
4, AMBER, MS 35387-2

AXLE: TUBULAR, MS 35865-A-2

SPRING ASS'Y: PART NO. 7061055

BRAKES SERVICE: INST'N. DWG. NO. 8342214
DRUM SIZE: 15 X 3
ACTUATION: AIR/HYDRAULIC
RELAY EMERGENCY VALVE: MS 53004-1
AIR RESERVOIR: 7411078

WHEELS: SINGLE, MS 53044-4
SIZE: 7.5 X 20

TIRES: 11.00 X 20, 12 PLY, MS 35388-21
TREAD DESIGN-NDCC, TUBE MS 35392-15

BRAKES PARKING: PART NO. 7411011, PART NO. 7411012
DRUM SIZE: 15 X 3
ACTUATION: MANUAL

MAXIMUM TOWING SPEED:
CROSS COUNTRY: 20 MPH.
HIGHWAY: 50 MPH.

TIE DOWNS: NO. 4.
LOCATION: 2 FRONT, 2 REAR,
PART NO. 8342177

(FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.)

(REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.)

THIS VEHICLE SHALL BE IN ACCORDANCE WITH DRAWINGS IN REFERENCED ENGINEERING PARTS LIST, COPIES OF WHICH MAY BE OBTAINED FROM:

U. S. ARMY TANK-AUTOMOTIVE CENTER
WARREN, MICHIGAN 48090.

APPROVED 1 AUGUST 1966 REVISED (A) FOR CHANGES SEE SHEET 1

This military standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. ARMY-AT Other Cust AF-84	TITLE TRAILER, BOLSTER: POLE HAULING, 3-1/2 TON, 2WHEEL, M271	MILITARY STANDARD MS 500064
PROCUREMENT SPECIFICATION MIL-T-13714	SUPERSEDES:	SHEET 2

DD FORM 1 SEP 57 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

☆ U. S. GOVERNMENT PRINTING OFFICE: 1972 714-167/7645

Source: https://assist.dla.mil - Downloaded: 2026-10-23T20:46Z
Check the source to verify that this is the current version before use.