
FED. SUP CLASS
2330

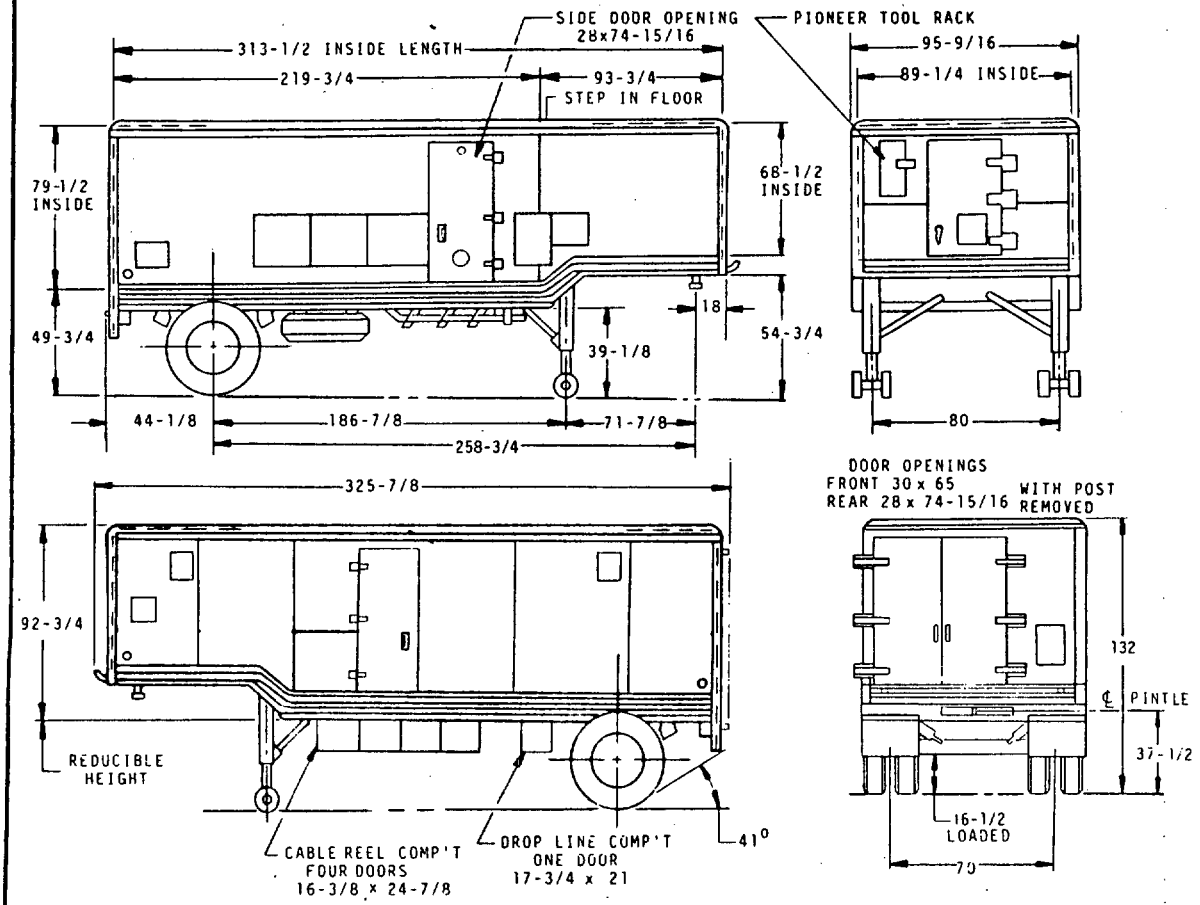

© ENTIRE STANDARD REVISED

MS PART NO.	ENGINEERING DWG NO
MS500066-1	8736271

APPROVED 8 AUGUST 1966 REVISED © 13 MAR 85

P. A ARMY-AT Other Cust	INTERNATIONAL INTEREST	TITLE SEMITRAILER, VAN: ELECTRONIC, TACTICAL, 6 TON, 2 WHEEL, 26 FT, M348A2F	MILITARY STANDARD MS500066(AT)
PROCUREMENT SPECIFICATION MIL-S-46714	SUPERSEDES:		SHEET 1 OF 2

DD FORM 1 MAY 73 672-1 LIMITED COORDINATION

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

USER ACTIVITIES:

REVIEWER ACTIVITIES:

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

DISTRIBUTION STATEMENT A. Approved for public release; distrubution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:46Z
Check the source to verify that this is the current version before use.

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense. DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
USER ACTIVITIES:
REVIEWER ACTIVITIES:

FED. SUP CLASS
2330

VEHICLE CHARACTERISTICS

GENERAL USAGE: SEMITRAILER VAN IS USED TO TRANSPORT (AND HOUSE) ELECTRONIC EQUIPMENT OVER ALL TYPES OF ROADS AND LIMITED CROSS-COUNTRY TERRAIN.

PRIME MOVER: TRUCK, TRACTOR, 5-TON, 6 X 6 , M52 SERIES OR M818 SERIES.

CURB WEIGHT: 9810 LBS.

PAYLOAD: 12,000 LBS.

WEIGHT DISTRIBUTION: SEMITRAILER NOT COUPLED TO TRUCK AND EMPTY:

LANDING GEAR	6500 LBS.
REAR BOGIE	3310 LBS.

WEIGHT DISTRIBUTION: SEMITRAILER COUPLED TO TRUCK AND EMPTY:

KINGPIN	4720 LBS.
REAR BOGIE	5090 LBS.

WEIGHT DISTRIBUTION: SEMITRAILER COUPLED TO TRUCK PAYLOAD EVENLY DISTRIBUTED.

	LOADED
KINGPIN	8880 LBS.
REAR BOGIE	12930 LBS.

VAN BODY ASSEMBLY: ALUMINUM CONSTRUCTION, WATERTIGHT, AND AIR TIGHT. VAN BODY IS PROVIDED WITH 2 VENTS AND 3 INTERIOR DOME LIGHTS AND IS INSULATED WITH URETHANE FOAM INSULATION. COMPOSITE THERMAL CONDUCTIVITY OF VAN IS: .23 BTU/HR/SF /F. EXTERIOR SKIN IS ALUMINUM. THE INTERIOR LINER IS PAINTED PLYWOOD, EXTERIOR TYPE, 3/8 INCH THICK. THE FLOOR IS LINOLEUM OVER 3/4 INCH THICK PLYWOOD.

KINGPIN: 2INCH DIAMETER.

LANDING GEAR: ADJUSTABLE, CRANK OPERATED.

VEHICLE ELECTRICAL SYSTEM: 24 VOLT SYSTEM;LIGHTING SYSTEM AND REFLECTORS COMPLY WITH DOT, FMVSS NO. 108

PINTLE: ASSEMBLY, TOWING P/N MS51335-1

RAIL CAR TIEDOWNS: TOTAL QUANTITY 6; 4 DOLLY FRAME (TWO EACH SIDE), TWO ON UNDERCARRIAGE FRONT (ONE EACH SIDE.)

AIRCRAFT VAN BODY TIEDOWNS: TOTAL QUANTITY 12; 2 FRONT, 4 EACH SIDE, AND 2 REAR.

*FORDING DEPTH: 5 FEET

MAXIMUM TOWING SPEEDS:

PAVED HIGHWAY	55 MPH
GRAVEL AND DIRT (SEC. RDS.)	50 MPH
BELGIAN BLOCK	20 MPH
LEVEL CROSS-COUNTRY	30 MPH
HILLY CROSS-COUNTRY	30 MPH

TIRE SIZE: 9:00 X 20, 8 PLY W/TUBE.

SUSPENSION: LEAF SPRINGS.

LEVELING JACKS: TWO, REAR, ONE EACH SIDE.

DOLLY: REMOVABLE W/SPARE TIRE ASSEMBLY, W/ONE AXLE ASSEMBLY.

AXLE RATING: CAPACITY 14000 LBS.

WHEELS: DUAL, SIZE 20 X 7-1/2, 6-1/4 OFFSET.

BRAKE SIZE: 16-1/2 X 5-1/2.

BRAKES ACTUATION: AIR OVER HYDRAULIC SERVICE.

REAR DOOR POST: REMOVABLE.

DOOR LOCKS: TAMPER RESISTANT.

MISCELLANEOUS EQUIPMENT:

CHOCK BLOCKS	2
BOARDING LADDERS	1, 3 STEP 1, 4 STEP
MANUAL BOX	1
MUD PLATES, LANDING GEAR	2

RADIO FREQUENCY SHIELDING: LOW DECIBLE ATTENUATION BETWEEN 15KHZ -18GHZ

LIFTING EYES: TOTAL QUANTITY 4, TWO FRONT (ONE EACH SIDE), TWO REAR (ONE EACH SIDE).

NOTES:
1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS.
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES OF WHICH MAY BE OBTAINED FROM: US ARMY TANK-AUTOMOTIVE COMMAND, WARREN MICH. 48090.
4. SUBJECT OF NATO STANAG 2805-A (EDITION 3) DO NOT REVISE OR CHANGE.

APPROVED 8 AUGUST 1966 REVISED © 13 MAR 85

© ENTIRE STANDARD REVISED

MS PART NO.	ENGINEERING DWG NO
MS500066-1	8736271

P.A.	INTERNATIONAL INTEREST	TITLE
ARMY-AT Other Cust		SEMITRAILER, VAN: ELECTRONIC, TACTICAL, 6 TON, 2 WHEEL, 26 FT, M348A2F

MILITARY STANDARD

MS500066(AT)

PROCUREMENT SPECIFICATION	SUPERSEDES:	SHEET
MIL-S-46714		2 OF 2

DD FORM 672-1 LIMITED COORDINATION

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:46Z
Check the source to verify that this is the current version before use.