
FED. SUP CLASS
2320

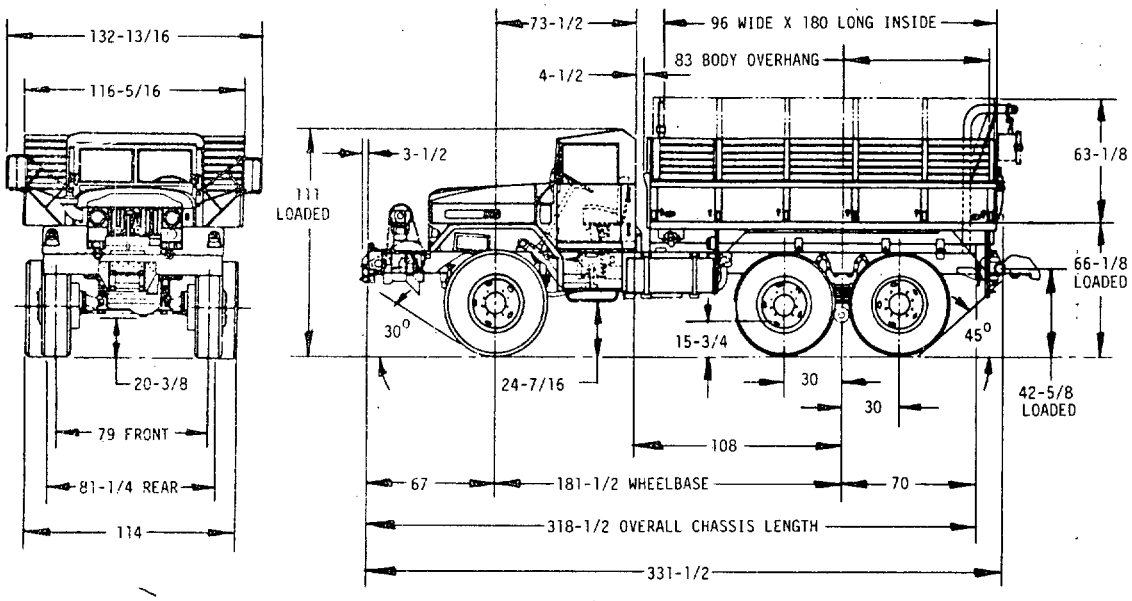

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

APPROVED 7 JUNE 1968 REVISED (B) 20 MAY 85

(B) ENTIRE STANDARD REVISED

MS PART NO.	ENGINEERING PARTS LIST
MS500094	8736671

P.A. ARMY-AT Other Cust	TITLE TRUCK, CARGO, 10 TON, 6X6, 181-1/2 IN. WHEELBASE, M125A1	MILITARY STANDARD MS500094(AT)
PROCUREMENT SPECIFICATION MIL-T-62012	SUPERSEDES:	SHEET 1 OF 2

DD FORM 1 SEP 87 672-1 LIMITED COORDINATION PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23120:47Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
2320

VEHICLE CHARACTERISTICS

WEIGHTS: LESS CREW

	EMPTY	LOADED
PAYLOAD		20000
FRONT AXLE	12520	13567
INTER AXLE	10100	19576
REAR AXLE	10100	19576
TOTAL	32720	52719

TOWED LOAD MAXIMUM: (PINTLE)
LOADED 35000 LBS

MINIMUM TURNING RADIUS: 462-1/2 IN

***FORDING DEPTH:** WITH KIT 78 IN
WITHOUT KIT 30 IN

POWER PLANT: INST'N 10946157
ENGINE DIESEL V8-300 COMPL 10946195
ENGINE DIESEL V8-300 BASIC 10946107
DISPLACEMENT 785 CU IN
BORE 5.50 IN STROKE 4.125 IN
COMPRESSION RATIO 16.9:1
GOVERNED SPEED 3000 RPM
MAXIMUM GROSS HP 300 @ 3000 RPM
MAXIMUM GROSS TORQUE 580 FT LBS @ 2100 RPM

COOLING SYSTEM INST'N 10946133
CAPACITY 49 QUARTS
RADIATOR AND SHROUD ASSY 10946106

FUEL SYSTEM: INST'N 10946175-1

EXHAUST SYSTEM: INST'N 10946072

CLUTCH ASSY: INST'N 10945906
CLUTCH PEDAL 8760431
PRESSURE PLATE 8332176
DISC COMPLETE, 2 8332177

TRANSMISSION: 8332883-1
FORWARD SPEEDS, 10 REVERSE 2
RATIOS: HIGH 7.53, 4.32, 2.60, 1.62, 1.00 LOW 18.83, 10.80, 6.50, 4.05, 2.50
REVERSE RATIOS; HIGH 7.53 LOW 18.83
TRANSFER; INTEGERAL WITH TRANSMISSION

FRONT SUSPENSION: INST'N 8760443-1
FRONT AXLE 7998622-1
FRONT SPRINGS 2 8332831

REAR SUSPENSION: BOGIE INST'N 8760450-2
AXLE REAR, FRONT 10945921-3
AXLE REAR, REAR 10945921-2
REAR SPRINGS 2 8332839
TORQUE ROD ASSEMBLY - FRONT 8329534
TORQUE ROD ASSEMBLY - REAR 7327455

PERFORMANCE:
FUEL TANK, CAPACITY 166 GALLONS
CRUISING RANGE, HIGHWAY 350 MILES
MAXIMUM SPEED, HIGHWAY 44 MPH

FRAME ASSEMBLY: 8760216-1
SIDE RAIL 10-5/8 X 3-1/4 X 5/16
SECTION MODULUS 15 INCHES^3

FRONT BUMPER: 7034876

WHEELS AND RINGS: MS53044-9
SIZE, 24 X 10 OFFSET 8-7/8
RING MS53045-5

TIRES: 10 PLUS ONE SPARE
SIZE 14 X 24 - 20 PLY NDMS MIL-T-12459

TUBES: 14 X 24 ZZ-I-550

CARGO BODY: INST'N 10864640
CARGO BODY 8728183

CAB: SOFT TOP INST'N 10864639-5
HOOD AND FENDER INST'N 10946159
STEERING GEAR AND LINKAGE INST'N 10946188
RUNNING BOARD, LEFT HAND INST'N 11659837-1
RUNNING BOARD, RIGHT HAND INST'N 10864938-3
SECOND BATTERY BOX INST'N 10946225
TACHOMETER CABLE INST'N 10946136
SPEEDOMETER CABLE INST'N 10864653
ACCELERATOR INST'N 10946119-1
AIR CLEANER INST'N 10946156
PROPELLER SHAFT INST'N 10945917

WINCH: (2 PART LINE) INST'N 10864657-1
WINCH, 45000 LB CAPACITY 7974740
FRONT WINCH DRIVE INST'N 10864655-1

DRAW BAR: INST'N 8760241

CHAIN HOIST: INST'N 10864641

AIR BRAKE SYSTEM: INST'N 11619832
GOVERNOR MS53006-1
PEDAL AND BRACKET ASSEMBLY 10875600
AIR RESERVOIR 2 7534286
VALVE, HAND CONTROL 8331393

ELECTRICAL SYSTEM: INST'N 11619829
COMPOSITE LIGHT, FRONT, TURN, PARK AND MARKER MS52126-2
HEADLIGHT 2 8741462
HEADLIGHT, BLACKOUT LEFT HAND MS51318-1
SLAVE RECEPTACLE 7731421
ALTERNATOR 10929868
BATTERIES, 12 VOLT, 6TN, 4 MS35000-4
WIRING DIAGRAM 10946158-1

REAR LIGHTING: INST'N 10945908

COMPOSITE LIGHT, TAIL, STOP TURN AND MARKER MS52125-2

ADDITIONAL EQUIPMENT AVAILABLE:
ARCTIC HEATER KIT, 11600101
HEATER KIT, PERSONNEL 11592317-2
FORDING KIT 11619826
EXHAUST EXTENSION 11619823
AIR INLET EXTENSION 10946212

NOTES:
1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BI
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES OF WHICH MAY BE OBTAINED FROM: US ARMY TANK-AUTOMOTIVE COMMAND, WARREN, MICH. 48090.
*4. SUBJECT OF NATO STANAG 2805-A(EDITION 3). DO NOT REVISE OR CHANGE.

APPROVED 7 JUNE 1968 REVISED (8) 20 MAY 85

(8) ENTIRE STANDARD REVISED

MS PART NO.	ENGINEERING PARTS LIST
MS500094	8736671

P.A. ARMY-AT Other Cust	TITLE TRUCK, CARGO, 10 TON, 6X6, 181-1/2 IN. WHEELBASE, M125A1	MILITARY STANDARD MS500094(AT)
PROCUREMENT SPECIFICATION MIL-T-62012	SUPERSEDES:	SHEET 2 OF 2

DD FORM 1, SEP 87 672-1 LIMITED COORDINATION

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:47Z
Check the source to verify that this is the current version before use.