This standard has been approved by the Signal Corps, Department of the Army and is mandatory for use by that activity. All other Army activities are requested to employ this standard where suitable.

NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

FED. SUP CLASS
6140

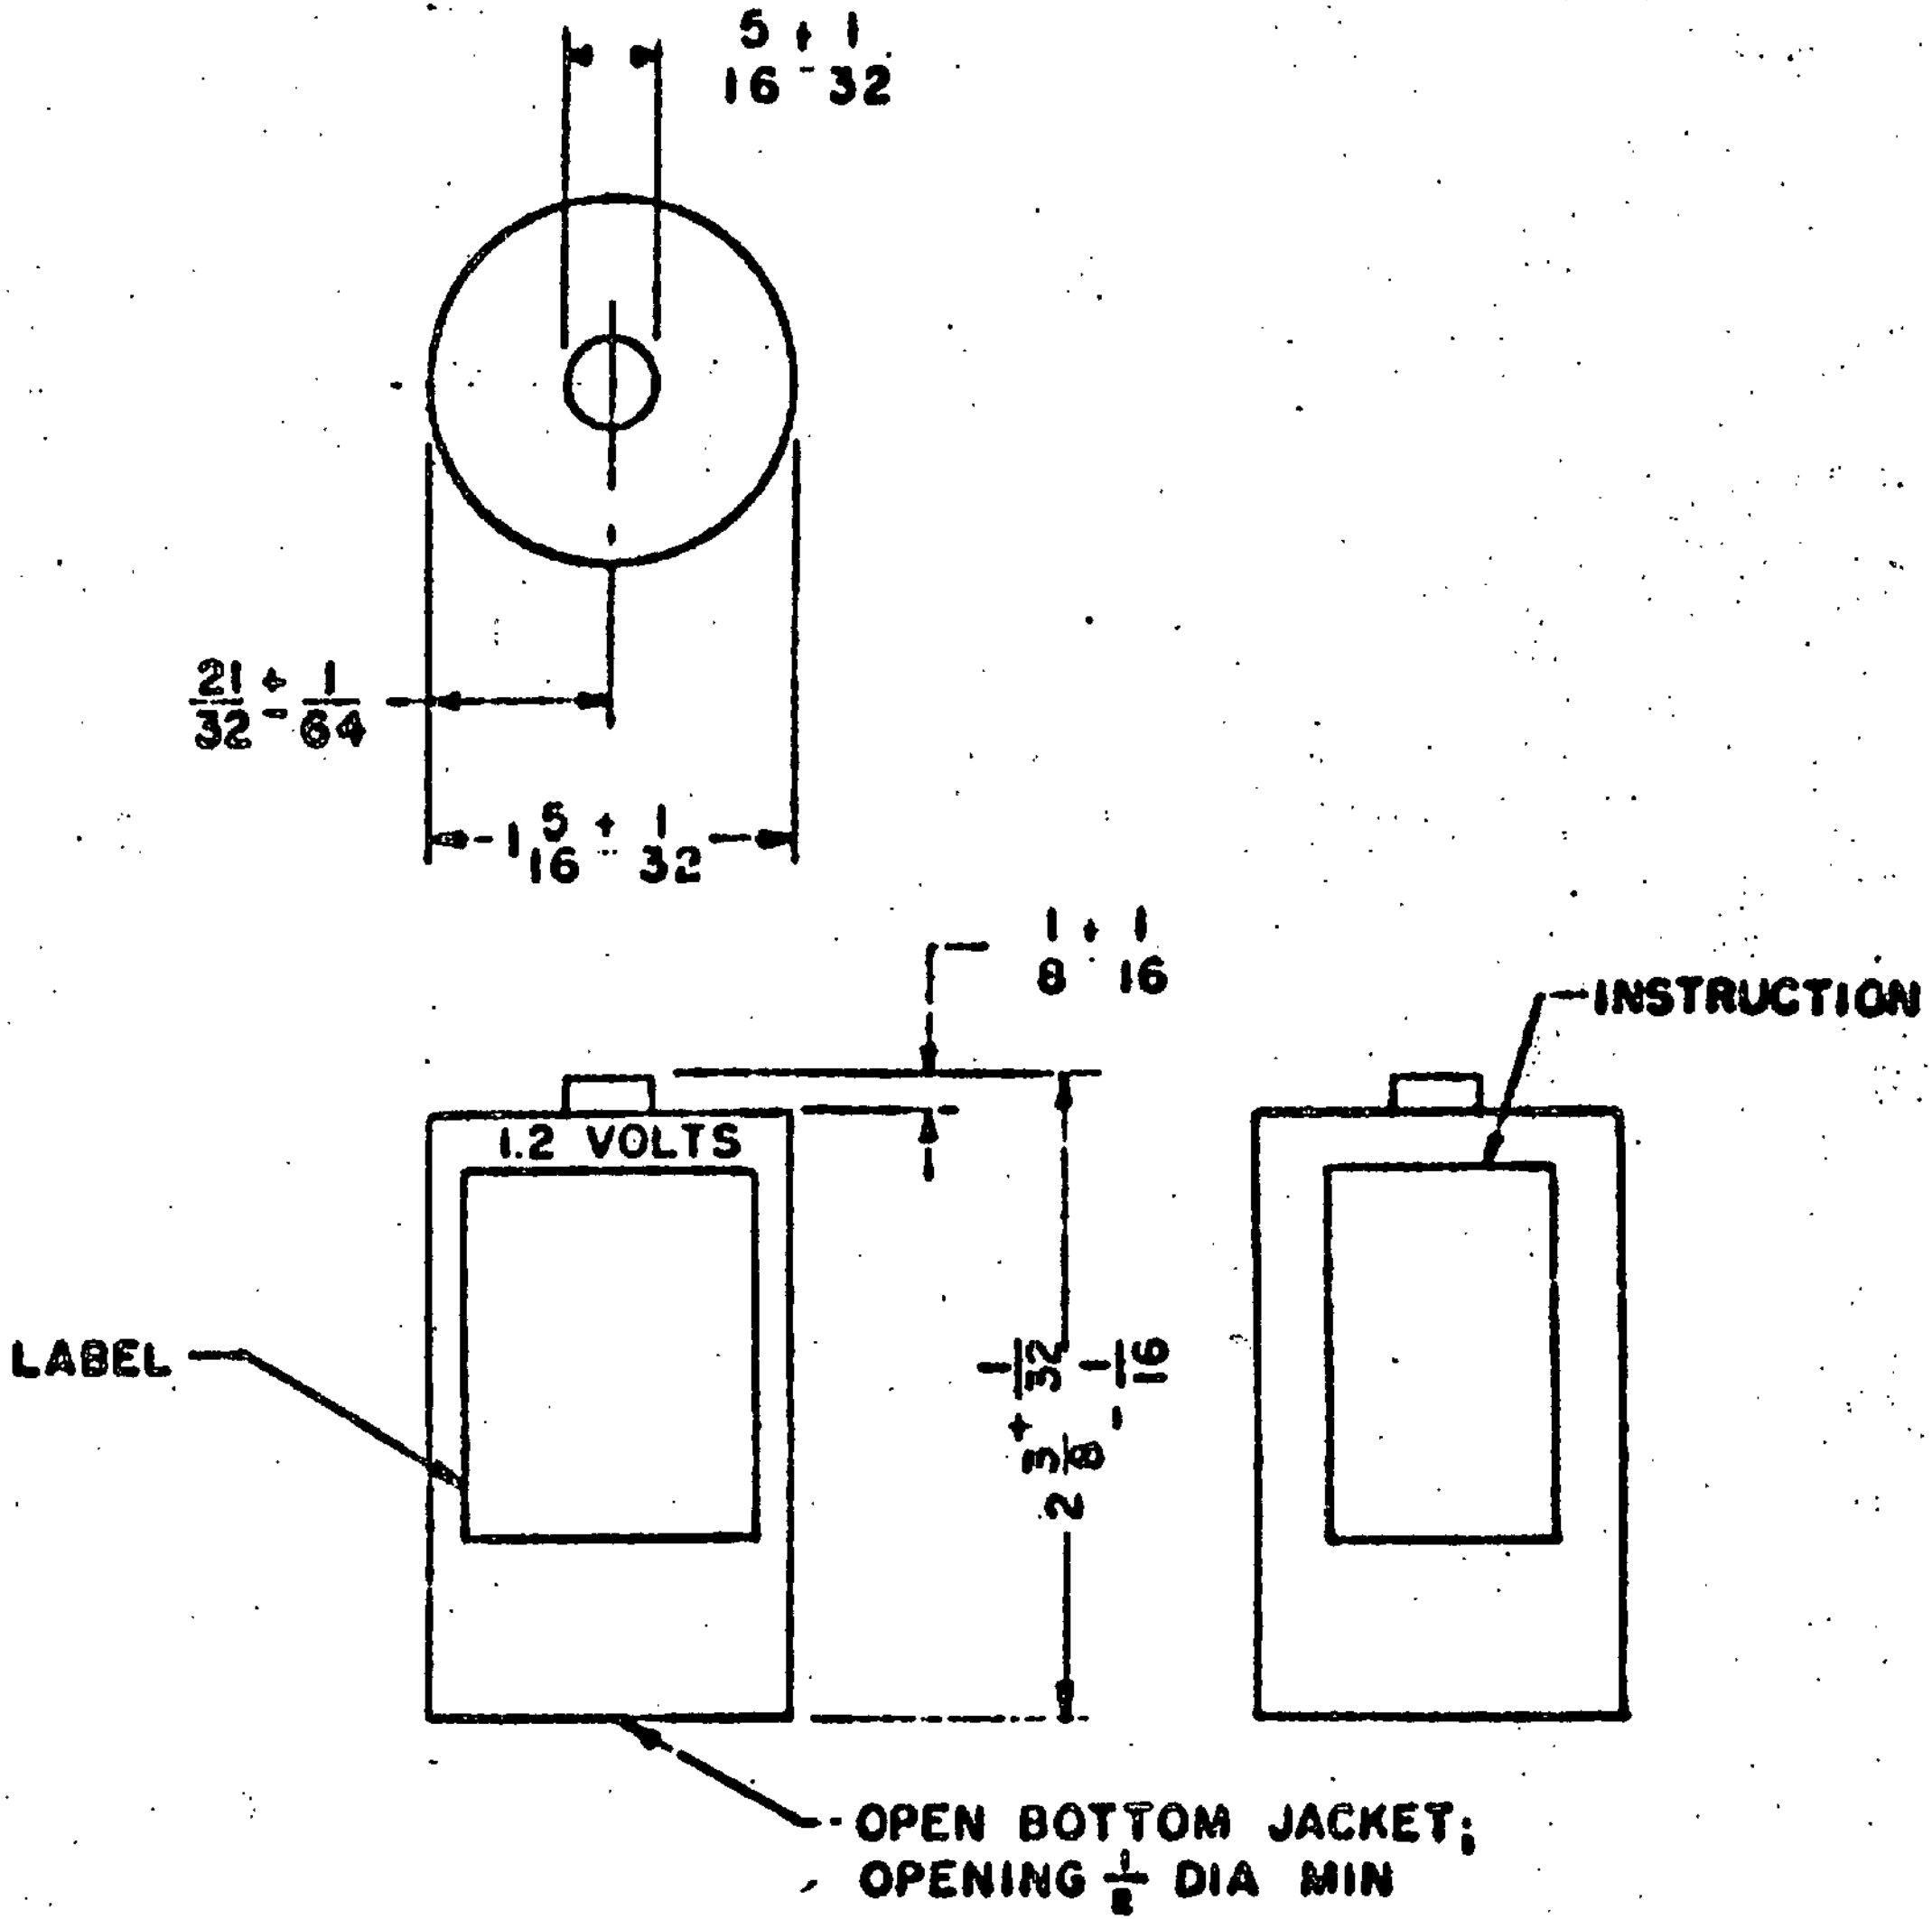

$\frac{5}{16} \pm \frac{1}{32}$
$\frac{21}{32} \pm \frac{1}{64}$
$1\frac{5}{16} \pm \frac{1}{32}$
$\frac{1}{8} \pm \frac{1}{16}$
INSTRUCTION
1.2 VOLTS
LABEL
$2\frac{3}{8} + \frac{1}{32} - \frac{1}{16}$
OPEN BOTTOM JACKET;
OPENING $\frac{1}{8}$ DIA MIN

NOTES:

1. ALL DIMENSIONS IN INCHES
2. For design feature purposes, this Standard takes precedence over procurement documents referenced herein.
3. Referenced documents shall be of the issue in effect on date of invitations for bids.

APPROVED 19 May 1961 REVISED

P.A. SigC Other Cust	TITLE BATTERY, STORAGE BB-412 ( )/U	MILITARY STANDARD MS 75031 (SigC)
Procurement Specification MIL-B-55130(SigC)	SUPERSEDES: [illegible]	SHEET 1 OF 2

DD FORM 1 SEP 57 672 (Limited coordination) [illegible]

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:27Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
6140

ELECTRICAL & PHYSICAL REQUIREMENTS

Class	Sealed Cell
Voltages	
Nominal	1.20 volts
Final (Unless otherwise specified)	1.00 volt
Rated Capacity (C_5)	3.50 A.H. (amp.hrs.)
Charge Rate ($0.2C_5$)	0.70 amps
Discharge Rates	
$0.2C_5$	0.70 amps
$3C_5$	10.5 amps
Terminals	Button Type
Max. Weight	6.5 oz
Container	Nickel-Cadmium Cold Rolled Steel, or equal
Number & Type of Cells	1 "D" Cell

PRODUCTION SAMPLING TESTS

Tests	Test Para.	Min. Test Value
Initial ~~Full~~ Capacity Discharge	4.9.1.1	3.50 A.H.
Full Capacity Discharge	4.9.1	3.50 A.H.
Low Temperature Discharge	4.9.2	
Test I	4.9.2.1	3.15 A.H.
Test II	4.9.2.2	1.75 A.H.
High Rate Discharge	4.9.4	
5 second voltage		1.15 volts
Minutes to 1.0 volt		15 Minutes
* Intermittent Discharge	4.9.3	1100 Minutes
Overcharge Test	4.14	3.50 A.H.
Cycle Life Test – Test I	4.12.1	400 cycles

* Discharge through 6.67 ohms for 4 minutes every 1/2 hour, 10 hours per day, 5 days per week to a cut-off voltage of 0.93 volt.

Retention of Charge		
Test I	4.15.1	2.60 A. H.
Test II	4.15.2	1.20 A. H.

APPROVED 19 May 1961 REVISED

This standard has been approved by the Signal Corps [illegible]

NOTICE—When Government [illegible]

P.A. Sig C Other Cust	TITLE Battery, Storage, BB-412( )/U	MILITARY STANDARD MS 75031 (SigC)
Procurement Specification MIL-B-55130(SigC)	SUPERSEDES:	SHEET 2 OF 2

DD FORM 1 SEP 57 672 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:27Z
Check the source to verify that this is the current version before use.