
FED. SUP CLASS 5306

MS9537

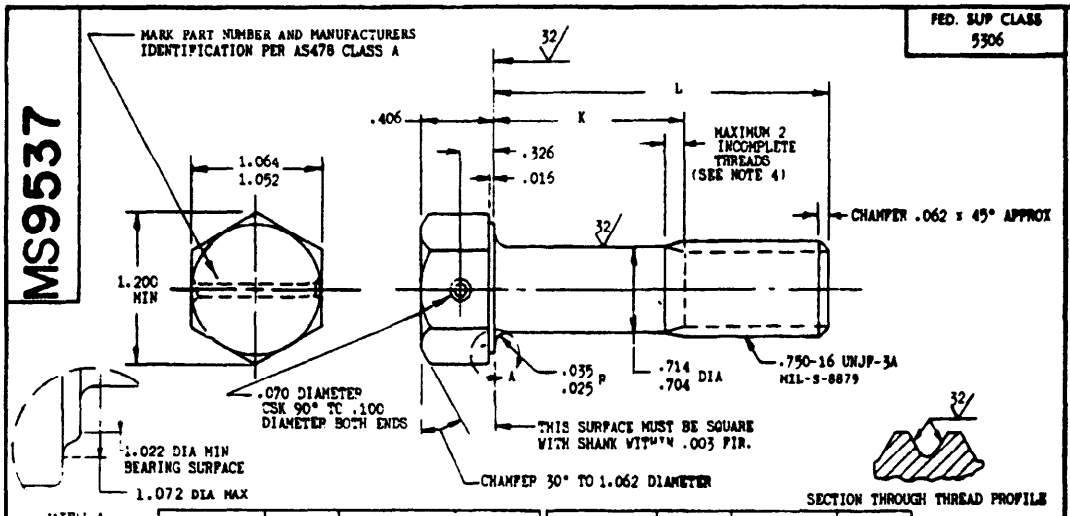

PART NUMBER	L	K	APPROX WEIGHT LB/100
MS9537-06	1.250	.129-.149	25.04
MS9537-07	1.312	.129-.149	25.74
MS9537-08	1.375	.129-.149	26.43
MS9537-09	1.438	.129-.149	27.13
MS9537-10	1.500	.129-.149	27.82
MS9537-11	1.562	.129-.149	28.52
MS9537-12	1.625	.129-.149	29.22
MS9537-13	1.688	.129-.149	29.91
MS9537-14	1.750	.129-.149	30.61
MS9537-15	1.812	.129-.149	31.30
MS9537-16	1.875	.129-.149	32.00
MS9537-17	1.938	.129-.188	32.69
MS9537-18	2.000	.190-.250	33.39
MS9537-19	2.125	.315-.375	34.78
MS9537-20	2.250	.440-.500	36.17
MS9537-21	2.375	.565-.625	37.56
MS9537-22	2.500	.690-.750	38.95
MS9537-23	2.625	.815-.875	40.34
MS9537-24	2.750	.940-1.000	41.73
MS9537-25	2.875	1.065-1.125	43.12
MS9537-26	3.000	1.190-1.250	44.51
MS9537-27	3.125	1.315-1.375	45.90
MS9537-28	3.250	1.440-1.500	47.29
MS9537-29	3.375	1.565-1.625	48.68
MS9537-30	3.500	1.690-1.750	50.08
MS9537-31	3.625	1.815-1.875	51.47
MS9537-32	3.750	1.940-2.000	52.86
MS9537-33	3.875	2.065-2.125	54.25
MS9537-34	4.000	2.190-2.250	55.64
MS9537-35	4.125	2.315-2.375	57.03
MS9537-36	4.250	2.440-2.500	58.42
MS9537-37	4.375	2.565-2.625	59.81
MS9537-38	4.500	2.690-2.750	61.20
MS9537-39	4.625	2.815-2.875	62.59
MS9537-40	4.750	2.940-3.000	63.98
MS9537-41	4.875	3.065-3.125	65.37
MS9537-42	5.000	3.190-3.250	66.76
MS9537-43	5.125	3.315-3.375	68.15
MS9537-44	5.250	3.440-3.500	69.54
MS9537-45	5.375	3.565-3.625	70.93
MS9537-46	5.500	3.690-3.750	72.33
MS9537-47	5.625	3.815-3.875	73.72
MS9537-48	5.750	3.940-4.000	75.11
MS9537-49	5.875	4.065-4.125	76.50
MS9537-50	6.000	4.190-4.250	77.89

1. SHANK SHALL BE STRAIGHT WITHIN .002 PER INCH OF BOLT LENGTH.
2. THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
3. THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND HEXAGON SHALL BE WITHIN .032 FIR.
4. INCOMPLETE THREADS NOT TO ENTER FILLET.
5. MATERIAL: STEEL AMS 6322.
6. HARDNESS: ROCKWELL C26-32.
7. FINISH: CADMIUM PLATE PER AMS 2400. DIMENSIONS SPECIFIED ARE AFTER PLATING.
8. MAGNETIC PARTICLE INSPECTION PER AMS 2640.
9. MANUFACTURING SPECIFICATION: AMS 7452 EXCEPT HEAD MUST BE UPSET.
10. SURFACE TEXTURE: USAS B46.1-1962. UNLESS OTHERWISE SPECIFIED SURFACES TO BE 125 MICROINCHES, EXCEPT HEXAGON.
11. BREAK SHARP EDGES .003 - .015 UNLESS OTHERWISE SPECIFIED.
12. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: LINEAR DIMENSIONS ± .010, ANGULAR DIMENSIONS ± 5°.
13. DO NOT USE UNASSIGNED PART NUMBERS.

CERTAIN PROVISIONS OF THIS STANDARD ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT AGTP AIR STD 17/2. WHEN REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED, THE ORIGINATING ACTIVITY WILL INFORM THEIR RESPECTIVE DEPARTMENTAL STANDARDIZATION OFFICES SO THAT APPROPRIATE ACTION MAY BE TAKEN REGARDING THE INTERNATIONAL AGREEMENT CONCERNED.

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE S.A.E. AEROSPACE PROPULSION DIVISION.

APPROVED 2 Feb 1968 ENVED

P.A. DEAP-EE	INTERNATIONAL INTEREST	TITLE: BOLT, MACHINE-STEEL AMS 6322, CADMIUM PLATE, DRILLED, 1 HOLE, HEXAGON HEAD, .750-16 UNJF-3A	MILITARY STANDARD MS9537
Other Cust NAVY-AS ARMY-AV			
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:		SHEET 1 OF 1

DD FORM 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE ☆ U. S. GOVERNMENT PRINTING OFFICE: 1966-381-516 4210

This military standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

reviewer activities:

Source: https://assist.dla.mil -- Downloaded: 202610-23T13:19Z
Check the source to verify that this is the current version before use.