MIL-I-3575 / 56A
1 DECEMBER 1976
SUPERSEDING
MIL-I-3575/56
5 June 1972

MILITARY SPECIFICATION SHEET

Insignia, Branch of Service, Officers; Cavalry, Army

This specification is approved for use by all Departments and Agencies of the Department of Defense. The complete requirements for procuring the item(s) described herein shall consist of this document and the issue in effect of Specification MIL-I-3575.

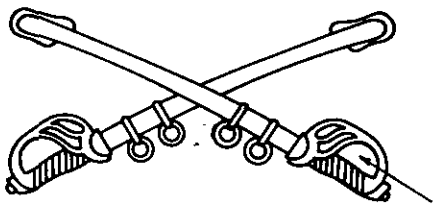

DASH NO.

-1: Regular
-2: Subdued

MATERIAL:
-1: RED BRASS
-2: RED BRASS OR ALUMINUM
DIMENSIONS (INCHES):
HEIGHT (OVERALL): 3/4 (REF)
WIDTH (OVERALL): 1-1/2 (REF)
THICKNESS (AT CENTER): .100 ± .005
FINISH:
-1: GOLD PLATED, MIRROR-LIKE POLISHED
-2: DULL FLAT BAKED BLACK ENAMEL FINISH OR ANODIZED AND DYED AS APPLICABLE

NOTES:
1. THE ATTACHING DEVICE SHALL BE PRONG AND CLUTCH. THE PRONGS SHALL BE LOCATED ON THE CENTERLINE OF THE SWORD EQUIDISTANT FROM EACH END AND 1-3/16 ± 1/16 INCH ON CENTERS.

2. DASH NO. 1 INSIGNIA IS AUTHORIZED TO BE MANUFACTURED FROM ALUMINUM FOR COMMERCIAL SALE ONLY.

3. PIERCED AREAS SHALL BE AS INDICATED.

CUSTODIANS:	REVIEW ACTIVITIES:	USER ACTIVITIES:	PREPARING ACTIVITY:
ARMY IH		SM	
OTHER	CT		THE INSTITUTE OF HERALDRY, UNITED STATES ARMY

Project No. 8455-A614

/FSC 8455/

☆ U. S. GOVERNMENT PRINTING OFFICE: 1977-703-020/5478

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:28Z
Check the source to verify that this is the current version before use.