# MILITARY SPECIFICATION SHEET

## INSIGNIA, AIDE, CHAIRMAN, JOINT CHIEFS OF STAFF, ARMY

*This specification is approved for use by all Departments and Agencies of the Department of Defense. The complete requirements for procuring the item(s) described herein shall consist of this document and the issue in effect of Specification MIL-I-3575.*

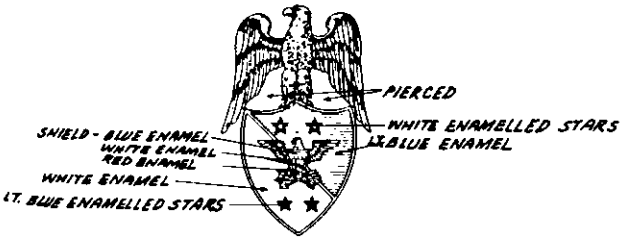


DASH NO.

-1: Regular
-2: Subdued

MATERIAL:
-1: GILDING METAL
-2: RED BRASS OR ALUMINUM

DIMENSIONS (INCHES):
EAGLE AND SHIELD:
HEIGHT (OVERALL): 1-1/4 (REF)
THICKNESS (THICKEST POINT): .080 ± .005
DEVICE:
HEIGHT (OVERALL): 9/32 (REF)
THICKNESS (THICKEST POINT): .060 ± .005

FINISH:
-1: EAGLE: GOLD PLATED SATIN FINISH WITH POLISHED HIGHLIGHTS
SHIELD: ENAMELED, GOLD PLATED, EDGES POLISHED
DEVICE: ENAMELED, GOLD PLATED SATIN FINISH
-2: DULL FLAT BLACK ENAMEL FINISHED OR ANODIZED AND DYED, AS APPLICABLE

NOTES:

1. THE DEVICE SHALL BE SUPERIMPOSED AND SECURED TO THE SHIELD BY TWO RIVETS OR WITH SOFT SOLDER.

2. THE RIVETS SHALL BE SOLID AND SHALL BE FABRICATED FROM ANY TYPE BRASS. THE RIVETS SHALL BE LOCATED ON AND SOLDERED TO THE WINGS.

3. THE DEVICE SHALL BE CENTERED ON THE VERTICAL CENTERLINE OF THE SHIELD EQUIDISTANT FROM THE STARS.

4. ENAMEL COLORS SHALL BE AS INDICATED. ENAMEL COLORS SHALL MATCH THE ENAMEL COLORS ON THE STANDARD OR APPROVED SAMPLES AND SHALL CONFORM TO THE COLOR CHIPS LISTED BELOW:

| COLOR | CHIP NO. |
|---|---|
| Red | 1 |
| White | 28 |
| Blue | 18 |
| Light Blue | 33 |

5. ATTACHING DEVICE SHALL BE PRONG AND CLUTCH TYPE. THE PRONGS SHALL BE LOCATED ON THE VERTICAL CENTERLINE, EQUIDISTANT FROM EACH END AND 7/8 ± 1/64 INCH ON CENTERS.

| CUSTODIANS: | REVIEW ACTIVITIES: | USER ACTIVITIES: |
|---|---|---|
| ARMY IH | | |
| DLA | CT | |

PREPARING ACTIVITY:

THE INSTITUTE OF HERALDRY, UNITED STATES ARMY

/FSC 8455/

Project No. 8455-A810



Source: https://assist.dla.mil -- Downloaded: 202610-16T18:29Z
Check the source to verify that this is the current version before use.