NOT MEASUREMENT SENSITIVE


MIL-I-3575/57B
15 February 1990
SUPERSEDING
MIL-I-3575/57A
5 May 1988

MILITARY SPECIFICATION SHEET


INSIGNIA, AIDE, CHAIRMAN AND VICE CHAIRMAN, JOINT CHIEFS OF STAFF, ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-I-3575.

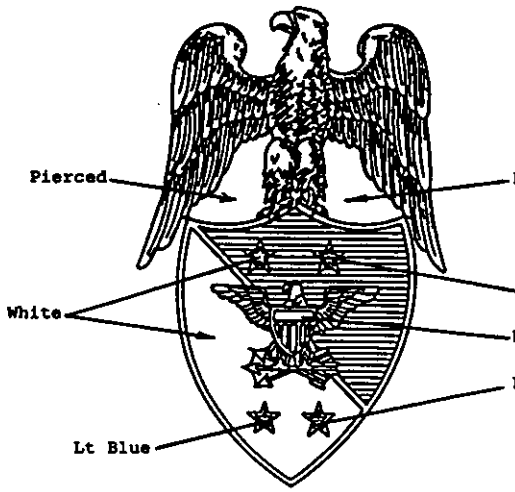

AIDE TO THE CHAIRMAN

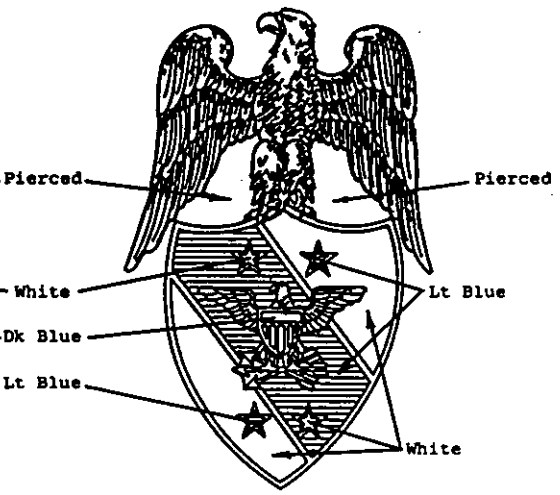

AIDE TO THE VICE CHAIRMAN

Dash no.:
- -1: Aide, Chairman, JCS (Regular)
- -2: Aide, Vice Chairman, JCS (Regular)
- -3: Aide, Chairman, JCS (Subdued)
- -4: Aide, Vice Chairman, JCS (Subdued)

MATERIAL:
- -1 & -2: Gilding metal
- -3 & -4: Red brass or zinc aluminum

DIMENSIONS:
- EAGLE AND SHIELD:
  - HEIGHT (Overall): 1-1/4 inch (3.18 cm) (REF)
  - THICKNESS (Thickest point): .080 inch ± .005 inch (0.203 cm) ± (0.012 cm)
- DEVICE:
  - HEIGHT (Overall): 3/8 inch (0.95 cm) (REF)
  - THICKNESS (Thickest point): .060 inch ± .005 inch (0.152 cm) ± (0.012 cm)

FINISH:
- -1 & -2: EAGLE: Gold plated matte finish with polished highlights.
  SHIELD: Hard enameled, gold plated, edges polished.
  DEVICE: Hard enameled, gold plated, matte finish.
- -3 & -4: Dull flat black enamel.

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-16T18:29Z
Check the source to verify that this is the current version before use.

NOTES:

1. The device shall be superimposed and secured to the shield by two rivets or soft soldered. When rivets are used they shall be solid and be fabricated from any type brass. The rivets shall be soldered to the vertical centerline of the device. The device shall be located on the insignia as shown.

2. Enameled areas shall be as indicated. The enamel colors shall match to the TIOH color chips listed below or the standard sample.

COLOR	CHIP NUMBER
Red	1
White	28
Blue	18
Lt. Blue	33

3. Attaching device shall be prong and clutch type. The prongs shall be located on the vertical centerline, equidistant from each end and 7/8 inch ± 1/64 inch (2.22 cm) ± (0.04 cm) apart.

4. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel for dash no. 1 and 2 at the option of manufacturer. When epoxy resin is used, rivets shall be used to attach the device to the shield.

5. The enamel for dash no. 3 and 4 shall match chip no. 37038 of FED-STD 595.
6. Pierced areas shall be as inidcated.
7. The stripes of the shield shall be enameled with alternating white and red; beginning with white and ending with white. The enamel colors shall match the TIOH color chip numbers listed in note 2.

Custodian:
Army-IH

Preparing Activity:
Army-IH

Review Activity:
DLA-CT

Project no. 8455-0449

User Activities:
DOD

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:29Z
Check the source to verify that this is the current version before use.