NOT MEASUREMENT SENSITIVE

MIL-I-3575/59A
15 February 1990
SUPERSEDING
MIL-I-3575/59
15 November 1983

MILITARY SPECIFICATION SHEET

INSIGNIA, BRANCH OF SERVICE, OFFICERS, AVIATION, ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-I-3575.

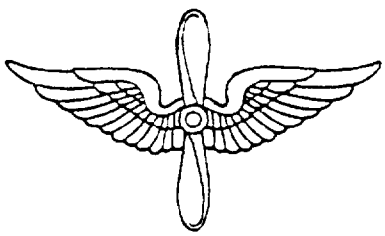

Dash No.:
-1: Regular
-2: Subdued
-3: Regimental (Regular)
-4: Regimental (Subdued)

MATERIAL:
-1, -3: Red brass
-2, -4: Red brass or zinc aluminum

DIMENSIONS (Inches):
HEIGHT (Overall): 3/4 inch (1.91 cm) (REF)
WIDTH (Overall): 1-1/4 inch (3.18 cm) (REF)
THICKNESS (Center of propeller): 0.100 inch ± .010 inch (0.254 cm) ± (0.025 cm)

FINISH:
-1, -3: WINGS: Gold plated, mirror-like polished finish
PROPELLER: Nickel plated, mirror-like polished finish (number(s) for -3: Gold plated, mirror-like polished)
-2, -4: Dull flat black enamel.

NOTES:
1. Attaching device shall be prong and clutch type. The prongs shall be located on a horizontal line 1/8 inch (0.16 cm) below the top of the wings and shall be 5/8 inch (1.59 cm) plus or minus 1/64 inch (0.04 cm) on centers.
2. The enamel for dash no. 2 and 4 shall match chip no. 37038 of FED-STD 595.
3. The number(s) for dash no. 3 and 4 shall be according to TIOH drawing B-2-56

Custodian:
Army-IH

Preparing Activity:
Army-IH

Review Activity:
DLA-CT

Project no. 8455-0449

AMSC N/A

FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:29Z
Check the source to verify that this is the current version before use.