NOT MEASUREMENT SENSITIVE


MIL-I-3575/61A
15 February 1990
SUPERSEDING
MIL-I-3575/61
10 August 1988

MILITARY SPECIFICATION SHEET

# INSIGNIA, BRANCH OF SERVICE, AIDE TO VICE CHAIRMAN, JOINT CHIEFS OF STAFF, AIR FORCE

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-I-3575.

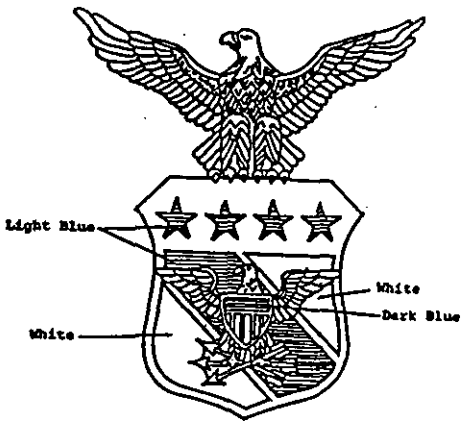


MATERIAL: Gilding metal

DIMENSIONS:
- BASE:
  - HEIGHT (Overall): 15/16 inch (2.38 cm) (REF)
  - WIDTH (Overall): 7/8 inch (2.22 cm) (REF)
  - THICKNESS (Thickest point): .065 inch + .010 inch -.000 (0.165 cm) + (0.025 cm) -.000
- DEVICE:
  - HEIGHT (Overall): 9/32 inch (0.71 cm) (REF)
  - WIDTH (Overall): 15/32 inch (1.19 cm) (REF)
  - THICKNESS (Thickest point): .055 inch (0.139 cm)

FINISH:
- BASE: Nickel plated, silver plated
  - EAGLE: Oxidized, relieved, matte finish, highlights polished
  - SHIELD: Hard enameled, chief and edges brightly polished, reverse and edges clean
- DEVICE: Hard enameled, gold plated, matte finish

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:30Z
Check the source to verify that this is the current version before use.

NOTES:

1. The device shall be superimposed and secured to the shield by two rivets or soft soldered. When rivets are used, they shall be solid and be fabricated from any type brass. The rivets shall be soldered to the vertical centerline of the device. The device shall be located on the insignia as shown.

2. The attaching device shall be prong and clutch type. The prongs shall be located on the vertical centerline, equidistant from each end and 5/8 inch ± 1/64 inch (1.59 cm) ± (0.04 cm) apart.

3. Enameled areas shall be as indicated The enamel colors shall match the TIOH color chip numbers listed below or the standard sample.

| COLOR | CHIP NUMBER |
|---|---|
| Lt. Blue | 30 |
| Dk. Blue | 18 |
| Red | 1 |
| White | 28 |

4. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of manufacturer. When epoxy resin is used, rivets shall be used to attach the device to the shield.
5. The stripes of the shield shall be enameled with alternating white and red; beginning with white and ending with white. The enamel colors shall match the TIOH color chip numbers listed in note 3.

Custodian:
Air Force - 11

Review Activities:
Air Force - 82,85
DLA-CT

Preparing Activity:
Army-IH

Project no. 8455-0449



Source: https://assist.dla.mil -- Downloaded: 202610-16T18:30Z
Check the source to verify that this is the current version before use.