NOT MEASUREMENT SENSITIVE


MIL-I-3575/65A
23 May 1995
SUPERSEDING
MIL-I-3575/65
9 June 1993

MILITARY SPECIFICATION SHEET

INSIGNIA, BRANCH OF SERVICE, OFFICERS, CHAPLAIN, MUSLIM FAITH, AIR FORCE

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-I-3575.

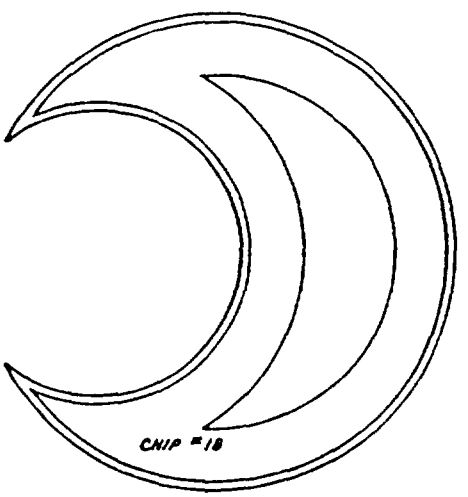

MATERIAL: Gilding Metal

FINISH: Hard Enamel, Nickel Plated, Mirror-like Polished and shall match TIOH Metal Finish Number 16.

DIMENSIONS:
HEIGHT: 1 inch (2.54 cm) (REF)
WIDTH: 31/32 inch (2.46 cm) (REF)
THICKNESS: 0.065 inch ± 0.005 inch (0.165 cm ± 0.012)

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:30Z
Check the source to verify that this is the current version before use.

2. Enameled color shall be blue as indicated. The color shall conform to the TIOH color chip number 18 or the standard sample.

3. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of manufacturer. Epoxy resin shall be smooth and flush with the dikes.

4. The attaching device shall be prong and clutch type. The prongs shall be located on the vertical center line, equidistant from each end and 3/4 inch ± 1/32 inch (1.91 cm ± 0.08 cm) apart and soldered or fused in place.

Custodian:
Army - IH
Air Force - 45

Review activities:
Air Force - 32, 82, 99
DLA - CT

Preparing activities:
Army - IH

(Project No. 8455-0794)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:30Z
Check the source to verify that this is the current version before use.