NOT MEASUREMENT SENSITIVE

MIL-I-3575/66B
23 May 1995
SUPERSEDING
MIL-I-3575/66A
23 June 1994

MILITARY SPECIFICATION SHEET

INSIGNIA, BRANCH OF SERVICE, OFFICERS, CHAPLAIN, MUSLIM FAITH, ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-I-3575.

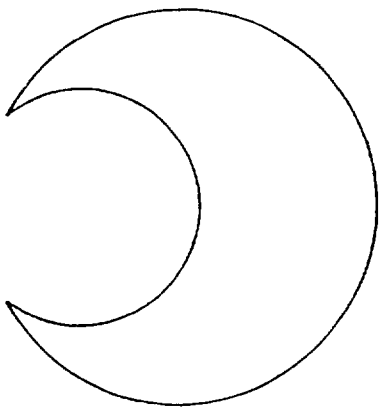

DASH NO.
-1: Regular
-2: Subdued

MATERIAL: Red Brass

FINISH:
-1: Nickel Plated, Mirror-like Polished and shall match TIOH Metal Finish Number 16.
-2: Baked Flat Black Enamel.

DIMENSIONS:
HEIGHT: 1 inch (2.54 cm) (REF)
WIDTH: 31/32 inch (2.46 cm) (REF)
THICKNESS: 0.065 inch ± 0.005 inch (0.165 cm ± 0.012)

NOTES:
1. The term (REF) refers to measurements taken from the Government furnished hub or die.

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:30Z
Check the source to verify that this is the current version before use.

2. The baked flat black enamel for Dash No. -2 shall match FED-STD-595, Chip No. 37038.

3. The attaching device shall be prong and clutch type. The prongs shall be located on the vertical center line, equidistant from each end and 3/4 inch ± 1/32 inch (1.91 cm ± 0.08 cm) apart and soldered or fused in place.

Custodian:
Army - IH

Review activities:
DLA - CT

Preparing activities:
Army - IH

(Project No. 8455-0794)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:30Z
Check the source to verify that this is the current version before use.