[INCH-POUND]
A-A-59367
2 April 1999
SUPERSEDING
MIL-S-23244D
29 March 1991

COMMERCIAL ITEM DESCRIPTION

SHEARING MACHINES, METAL SQUARING, MANUALLY OPERATED

The General Services Administration has authorized the use of this commercial item description in preference to MIL-S- 23244 for all federal agencies.

1. SCOPE. This commercial item description (CID) covers hand and foot operated squaring shears, equipment and accessories herein specified with a shearing capacity of 16 gauge mild steel.

2. CLASSIFICATION. Shearing machines shall be of the following types and sizes.

2.1 Type. Type is defined as the combination of frame design and method of operation. Unless otherwise specified (see 7.3), the types described herein are as follows:

Type I – Bench mounting, gapless frame, hand lever operation.
Type II – Floor mounted, gapless frame, foot treadle operation.
Type III – Floor mounted, gap frame, foot treadle operation.

2.2 Size. Size is defined as the cutting width of the machine. Unless otherwise specified (see 7.3), the sizes described herein are as follows:

Size A – 6 inches
Size B – 12 inches
Size C – 24 inches
Size D – 36 inches
Size E – 48 inches
Size F – 52 inches
Size G – 72 inches

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any data which may improve this document should be sent to: Defense Supply Center Richmond, ATTN: DSCR-VBD, Richmond, VA 23297-5610.

AMSC N/A FSC 3445

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:12Z
Check the source to verify that this is the current version before use.

3. SALIENT CHARACTERISTICS

3.1 Design. The shearing machine shall include all components, parts, and features necessary to meet the performance requirements specified herein. The shearing machine shall be manually operated and designed to accomplish shearing of 16 gauge mild steel by the movement of a crosshead mounted upper shear blade past the stationary lower shear blade. The operating mechanism shall be designed to assure that sufficient force is developed by a single stroke of the lever to accomplish the shearing performance requirements of this CID. The shearing machine shall comply with the requirements of ANSI B11.4 and the safety requirements of OSHA 29 CFR 1910.

3.2 Frame. The frame shall consist of a crosshead, holddown mechanism, bed and shear blades. The minimum cutting length of the shearing machine shall be as specified in table I.

TABLE I. Shearing Machine Types and Sizes.

Type	Size	Minimum cutting length (inches)	Minimum back gauge range (inches)	Minimum front gauge range (inches)
I	A	6	0 - 12	N/A
I	B	12	0 - 12	N/A
I	C	24	0 - 12	N/A
I	D	36	0 - 25	N/A
II	D	36	0 - 25	0 - 30
II	E	48	0 - 25	0 - 30
II, III	F	52	0 - 25	0 - 30
II	G	72	0 - 25	0 - 30

3.2.1 Crosshead. The crosshead shall be constructed of either iron or steel, designed to guide the upper shear blade during shearing action. The crosshead shall be provided with adjustable stops for controlling the distance of blade travel. Crosshead travel shall be accomplished on machined bearing surfaces with provisions to compensate for wear.

3.2.2 Holddown mechanism. Shearing machines with cutting capacities greater than 6 inches in length shall be provided with a holdown, or similar device, for holding the work piece securely in place during cutting operations. The holddown shall be either automatic or manually operated. The holddown mechanism shall provide an unobstructed view of the shearing action from the operator's station when the holddown mechanism is activated.

3.2.3 Bed. The bed shall be of stress free construction either cast iron or steel plate, with a top surface finished to 125 microinches or less and flat to within a tolerance of $^{+}_{-}$ 0.005 inch per linear foot. The bed shall support the lower shear blade. The bed shall be provided with adjustments for shear blade adjustment and wear. The bed shall have provisions for attaching and accommodating positioning gauges as specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:12Z
Check the source to verify that this is the current version before use.

3.2.4 Shear blades. Shear blades shall be high carbon alloy steel, hardened to not less than 57 Rockwell C. Shear blades for machines with a 6 inch cutting width shall be the reversible type, and shall be provided with not less than two cutting edges. Shear blades for machines with cutting lengths of 12 inch and greater shall be the reversible type, and shall be provided with not less than four cutting edges.

3.3 Type I – Bench mounting, gapless frame, hand lever operation. Shearing action of the crosshead shall be accomplished by a hand lever type operating mechanism of either the cam and camshaft type or the gear segment and pinion shaft type. The operating mechanism shall be designed to assure that sufficient force is developed by a single stroke of the hand lever to accomplish shearing. The hand lever shall be not more than 30 inches in nominal length.

3.4 Type II – Floor mounted, gapless frame, foot treadle operation. Shearing action of the crosshead shall be accomplished by a foot trendle type operating. The operating mechanism shall be designed to assure that sufficient force is developed by a single stroke of the foot trendle to accomplish shearing and automatically return the foot trendle to the original operating position when released by the operator.

3.5 Type III – Floor mounted, gap frame, foot treadle operation. The shearing machine shall be provided with workpiece clearance gaps recessed in the end housings not less than 18 inches from the lower shear blade. Shearing action of the crosshead shall be accomplished by a foot trendle type operating mechanism. The operating mechanism shall be designed to assure that sufficient force is developed by a single stroke of the foot trendle to accomplish shearing and automatically return the foot trendle to the original operating position when released by the operator. When specified (see 7.3), the machine shall be provided with a slitting gauge for guiding the workpiece during slitting operations.

3.6 Standard equipment. All standard equipment normally provided with the manufacturer's commercial shear shall be provided. Standard equipment shall include a back gauge, bevel gauge and side squaring gauge. Type II and type III machines shall also be supplied with a front gauge.

3.6.1 Back gauge. Shearing machines shall be furnished with a back gauge to provide an adjustable reference edge for positioning the workpiece parallel with the lower shear blade. The reference edge shall be adjustable by a control with a recessed graduated scale of not larger than 1/32 of an inch. The minimum back gauge range shall be in accordance with table 1 for the press specified.

3.6.2 Front gauge. Two front gauge support arms, with adjustable workstops, shall be attached to the bed for positioning the workpiece parallel to the lower shear blade. The reference edge shall be adjustable by a control with a recessed graduated scale of not larger than 1/32 of an inch. The locking workstops shall be in T-slots or grooves, machined throughout the full length of the support arms. The minimum back gauge range shall be in accordance with table 1 for the press specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:12Z
Check the source to verify that this is the current version before use.

3.6.3 Bevel gauge. The machine shall be furnished with an adjustable bevel gauge mounted on the bed for positioning the workpiece to any desired angle up to and including 180 degrees. The bevel gauge shall be detachable.

3.6.4 Side squaring gauge. The bed shall be provided with a side squaring gauge for positioning the workpiece at right angles to the shear blades. A calibrated scale with increments not larger than 1/32 of an inch shall be recessed in the gauge.

3.7 Optional equipment. Optional equipment shall be furnished as specified and shall be fully described by the procuring activity (see 7.3).

3.8 Physical size limitations. When specified (see 7.3), the physical size of the press shall not exceed the height, width, and length restrictions specified by the procuring activity to ensure the press will fit into its operating location.

3.9 Marking on instruments, control panels, charts, and plates. All words on the press, including all instruments, control panels, charts, data plates and related attachments, shall be in the English language. Characters shall be marked in boldface on a contrasting background.

3.10 Data plates. All standard data plates normally provided with the manufacturers standard commercial press shall be furnished. Any additional data plates shall be as specified and fully described by the procuring activity (see 7.3). All data plates shall be corrosion resistant.

3.11 Nameplate. Unless otherwise specified (see 7.3), a corrosion resistant nameplate shall be securely attached to each press. The nameplate shall contain the information listed below.

Nomenclature
Manufacturer Name
Manufacturer Model
Manufacturer Serial Number
Contract Number or Order Number
National Stock Number
Date of Manufacture

3.12 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units. Each product shall fall within specified tolerances using conversion tables contained in the latest revision of FED-STD-376, and shall meet all other requirements of this commercial item description.

4. REGULATORY REQUIREMENTS

4.1 Recovered materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:12Z
Check the source to verify that this is the current version before use.

5. QUALITY ASSURANCE PROVISIONS

5.1 Product conformance. The products provided shall meet the salient characteristics of this commercial item description; conform to the producer's own drawings, specifications, standards and quality assurance practices; and be the same product offered for sale in the commercial market. The government reserves the right to require proof of such conformance.

6. PACKAGING. Preservation, packing, and marking shall be as specified in the contract or order (see 7.3).

7. NOTES

7.1 Part identification number (PIN). The following part identification numbering procedure is for government purposes and does not constitute a requirement for the contractor.

This example describes a part numbering system for CID A-A-59367.

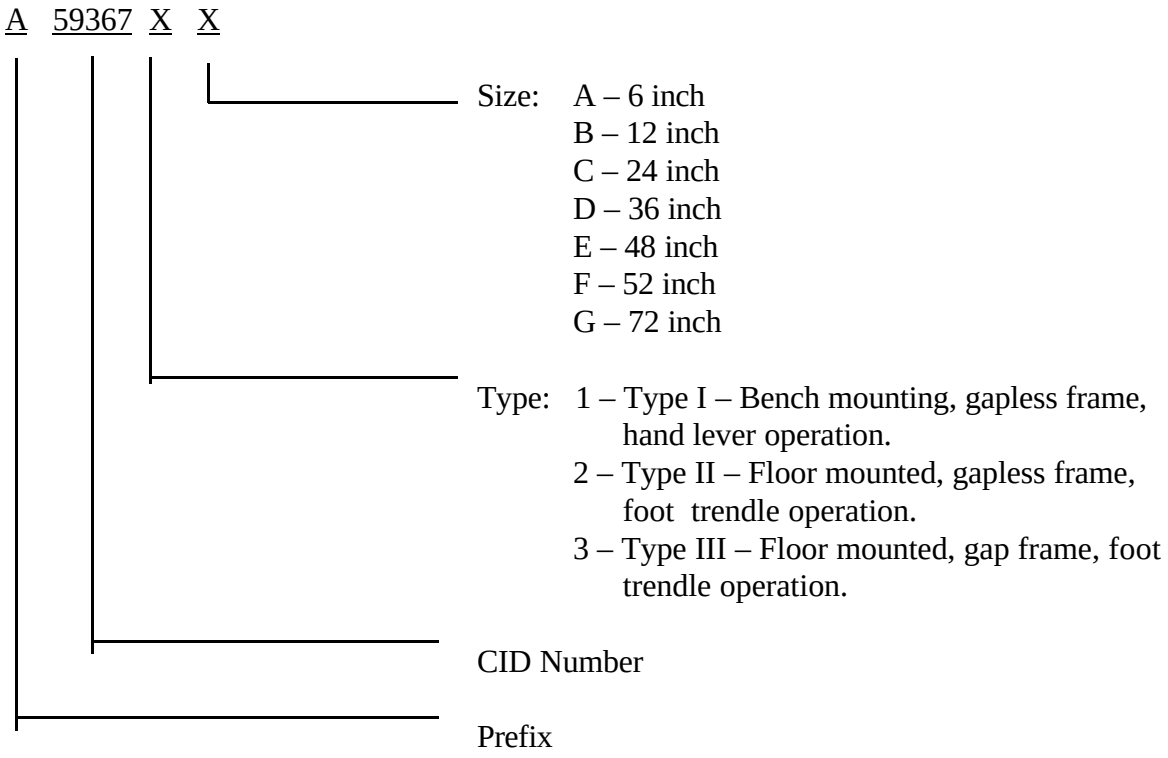

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:12Z
Check the source to verify that this is the current version before use.

7.2 Referenced documents.

7.2.1 ANSI B11.4 is available from the American National Standards Institute, 1430 Broadway, New York, NY 10018-3363.

7.2.2 OSHA, 29 CFR 1910 maybe obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.

7.2.3 FED-STD-376 is available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.

7.2.4 Federal Acquisition Regulation (FAR) maybe obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.

7.3 Ordering data. Purchasers should select the preferred options permitted herein, and include the following information in order:

a. Title, number, and date of this commercial item description.
b. Type (see 2.1).
c. Size (see 2.2).
d. Optional equipment, if required (see 3.7)
e. Physical size limitations, if applicable (see3.8).
f. Additional data plates, if required (see 3.10).
g. Nameplate, if different (see 3.11).
h. Packaging, if different (see 6).

7.4 National stock numbers (NSNs). The following NSNs correspond to this CID. The list is not indicative of all possible NSNs associated with this document.

NSN	Old PIN	New PIN
3445-00-239-0706	M232442A36	A593672D
3445-00-243-2661	M232442B52	A593673F
3445-01-036-9086	M232441A36	A593671D
3445-01-438-7818	M232442B52	A593673F
3445-00-294-6467	M232442B52	A593673F

7.5 Intended use. Shears covered by this commercial item description are for use in machine production, repair, and maintenance shops.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:12Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians
Army - AL
Navy - SH
Air Force - 99

PREPARING ACTIVITY:

DLA - GS
(Project 3445-0149)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:12Z
Check the source to verify that this is the current version before use.