
FEDERAL SPECIFICATION SHEET


FILTER, RADIO FREQUENCY INTERFERENCE

This specification was approved by the Assistant Administrator, Office of Federal Supply and Services, General Services Administration, for the use of all Federal agencies.

The complete requirements for procuring the filters described herein shall consist of this document and the latest issue of W-F-2190/GEN.

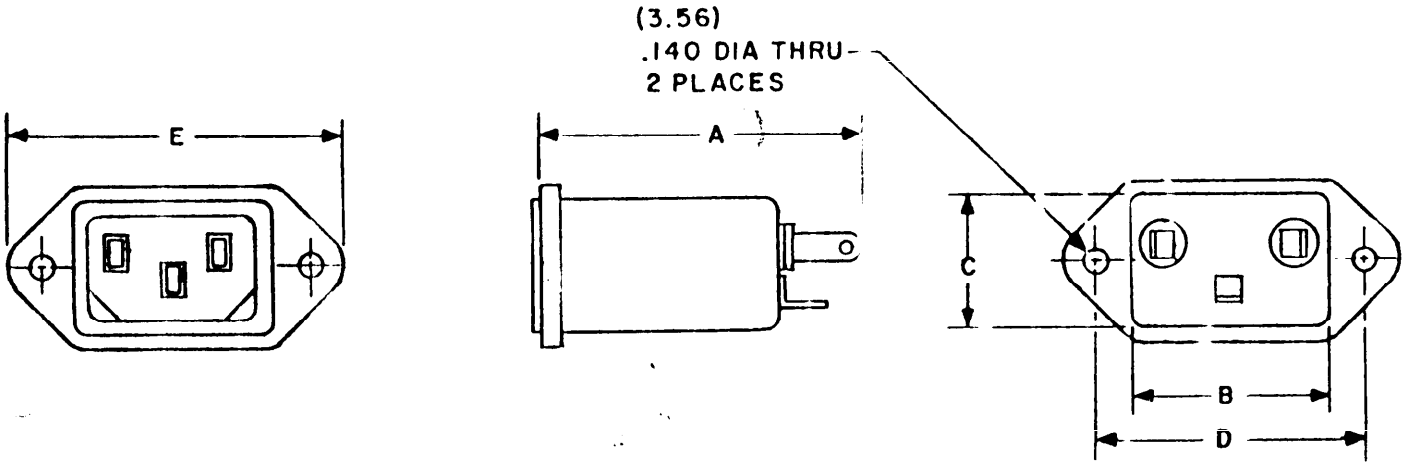

Part number MF2190/11	Maximum dimensions									
	A		B		C		D		E	
	IN	MM	IN	MM	IN	MM	IN	MM	IN	MM
-01	1.97	50.0	1.175	29.8	.83	21.08	1.58	40.1	1.97	50.0
-02	"	"	"	"	"	"	"	"	"	"
-03	"	"	"	"	"	"	"	"	"	"

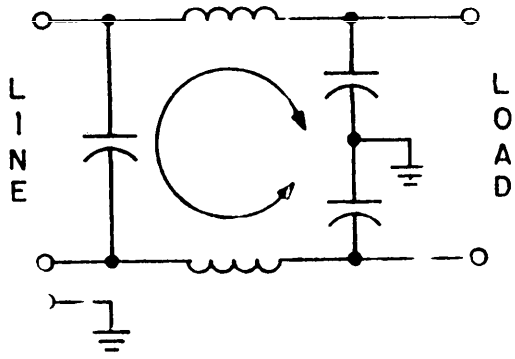

ELECTRICAL SCHEMATIC

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Millimeters are in parenthesis.
4. Receptacle shall be capable of mating with IEC integral male line cord.

FIGURE 1. Case dimensions and electrical schematics.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:37Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Dimension and electrical schematics: See figure 1.

Operating temperature range: 0°C to +65°C.

Maximum leakage current. As measured from either of the two input or output lines to the filter case, the maximum permissible leakage current shall not exceed 0.65 mA at 125 volts, 60 Hz or 1.25 mA at 250 volts, 50 Hz.

Voltage rating:

Rated at 125 volts, ac, over the frequency range of 0 to 400 Hz.

Rated at 250 volts, ac, over the frequency range of 0 to 60 Hz.

Rated current: See table I.

Insertion loss: In accordance with MIL-STD-220 and table I.

Part number: Shall be in accordance with table I and figure 1.

Substitution data: Filters covered by this specification replace commercial part numbers as specified in table II.

TABLE I. Current ratings and insertion loss.

Part number WF2190/11	Current rating (amperes per line)	Minimum no-load insertion loss (dB) at +25°C in accordance with MIL-STD-220				
		.15 MHz	.20 MHz	.50 MHz	10 MHz	20 MHz
-01	1	15	20	30	45	45
-02	3	10	15	25	"	"
-03	6	8	10	20	"	"

Source: https://assist.dla.mil - Downloaded: 2026-10-26T11:37Z
Check the source to verify that this is the current version before use.

TABLE II. Substitution data. 1/ 2/

Part number WF2190/11	FSCM 73631	05245	23880	56289	93790	13619
	Vendor part number					
-01	F2100CA01	1EF1	CA-1	1JX5411A	APF10 0CEI	RF9600-W01
-02	F2100CA03	3EF1	CA-3	3JX5421A	APF30 0CEI	RF9600-W03
-03	F2100CA06	6EF1	CA-6	6JX5431A	APF60 0CEI	RF9600-W06

TABLE II. Substitution data 1/ 2/ - Continued.

Part number WF2190/11	FSCM 02777	13050	96733	96733	122 4
	Vendor part number				
-01	F85104	610G1	F2EF011	F2C011	9679-101-9191
-02	F85105	610G3	F2EF031	F2C031	9679-101-9201
-03	F85106	610G6	F2EF061	F2C061	9679-101-9192

1/ Set of vendor part numbers is not necessarily complete. Additional vendor part numbers will be added as they become available.

2/ CAUTION. Do not use the vendor part number for item procurement. The similar vendor part number may not satisfy the performance requirements specified herein.

MILITARY INTERESTS:

Custodians

Army - ER
Navy - EC
Air Force - 85

Review Activities

Army - AR, MI
Navy - SH
Air Force - 11, 17, 99

User Activities

Army - AT, AV, ME
Navy - AS, MC, OS, YD
Air Force - 19

CIVIL AGENCY COORDINATING ACTIVITIES:

GSA - FSS
NCS -
NASA - MSF, LRC, JSK

PREPARING ACTIVITY:

DLA - ES

DOD project 5915-0271-11

U.S. GOVERNMENT PRINTING OFFICE : 1984 - 421-706/823

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:37Z
Check the source to verify that this is the current version before use.