FEDERAL SPECIFICATION SHEET

FILTER, RADIO FREQUENCY INTERFERENCE

This specification was approved by the Assistant Administrator, Office of Federal Supply and Services, General Services Administration, for the use of all Federal agencies.

The complete requirements for procuring the filters described herein shall consist of this document and the latest issue of W-F-2190/GEN.

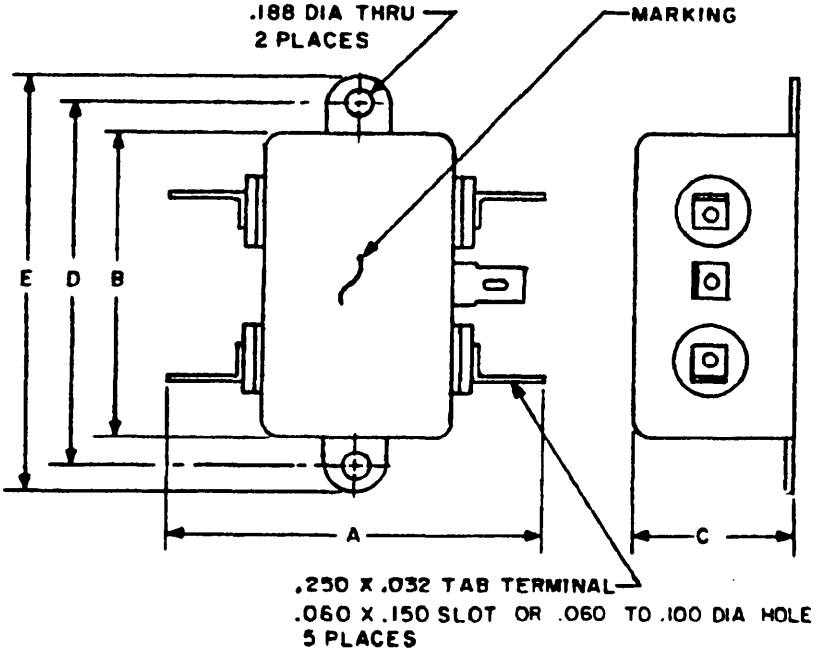



FIGURE 1. Case dimensions and electrical schematics.

FSC 5915

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:37Z
Check the source to verify that this is the current version before use.

INCHES	MM
.032	.81
.060	1.52
.150	3.81
.188	4.77
.250	6.35

Part number WF2190/1	Maximum dimensions										Electrical schematic
	A		B		C		D		E		
	IN	MM	IN	MM	IN	MM	IN	MM	IN	MM	
-01	2.18	55.37	1.75	44.4	.63	15.9	2.13	54.1	2.50	63.5	A
-02	3.05	77.47	2.00	50.8	.88	22.3	2.38	60.4	2.78	70.6	B
-03	2.18	55.37	1.75	44.4	.63	15.9	2.13	54.1	2.50	63.5	A
-04	3.05	77.47	2.00	50.8	.88	22.3	2.38	60.4	2.78	70.6	B
-05	2.55	64.77	1.75	44.4	.75	19.0	2.13	54.1	2.50	63.5	A
-06	3.05	77.47	2.00	50.8	1.13	28.7	2.38	60.4	2.78	70.6	B
-07	2.55	64.77	1.75	44.4	.75	19.0	2.13	54.1	2.50	63.5	A
-08	3.05	77.47	2.00	50.8	1.13	28.7	2.38	60.4	2.78	70.6	B
-09	2.55	64.77	1.75	44.4	1.13	28.7	2.13	54.1	2.50	63.5	A
-10	3.30	83.82	2.00	50.8	1.13	28.7	2.38	60.4	2.78	70.6	B
-11	3.30	83.82	2.00	50.8	1.13	28.7	2.38	60.4	2.78	70.6	A
-12	3.30	83.82	2.50	63.5	1.50	38.1	2.94	74.7	3.32	84.3	B

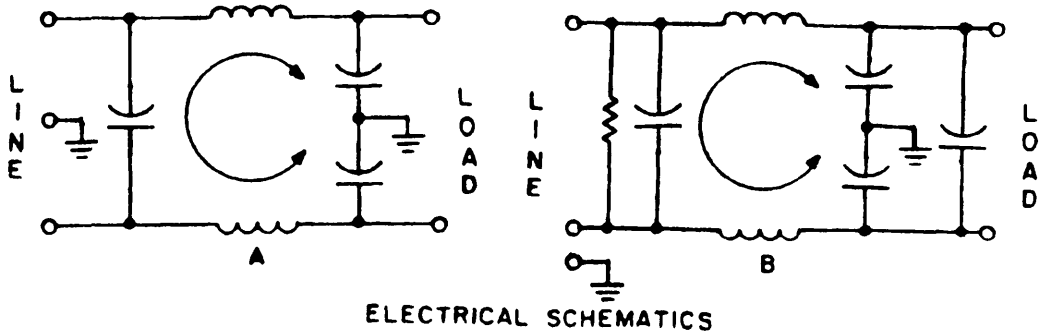

ELECTRICAL SCHEMATICS

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

FIGURE 1. Case dimensions and electrical schematics - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:37Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Dimension and electrical schematics: See figure 1.

Operating temperature range: 0°C to +65°C.

Maximum leakage current: As measured from either of the two input or output lines to the filter case, the maximum permissible leakage current shall not exceed 0.65 mA at 125 volts, 60 Hz or 1.25 mA at 250 volts, 50 Hz.

Voltage rating:

Rated at 125 volts, ac, over the frequency range of 0 to 400 Hz.

Rated at 250 volts, ac, over the frequency range of 0 to 60 Hz.

Rated current: See table I.

Insertion loss: In accordance with MIL-STD-220 and table I.

Part number: Shall be in accordance with table I and figure 1.

Substitution data: Filters covered by this specification replace commercial part numbers as specified in table II.

TABLE I. Current ratings and insertion loss.

Part number WF2190/1	Current rating (amperes per line)	Minimum no-load insertion loss (dB) at +25°C in accordance with MIL-STD-220				
		.15 MHz	.20 MHz	.50 MHz	10 MHz	20 MHz
-01	1.0	15	20	30	50	50
-02	1.0	15	20	30	"	"
-03	2.0	10	15	25	"	"
-04	2.0	10	15	25	"	"
-05	3.0	15	20	30	"	"
-06	3.0	15	20	30	"	"
-07	5.0	10	15	25	"	"
-08	5.0	"	"	"	"	"
-09	10.0	"	"	"	"	"
-10	10.0	"	"	"	"	"
-11	20.0	"	"	"	"	"
-12	20.0	"	"	"	"	"

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:37Z
Check the source to verify that this is the current version before use.

TABLE II. Substitution data. 1/ 2/

Part number WF2190/1	FSCM 96733	96733	12294	73631	05245
	Vendor part number				
-01	F2B011	F2A011	9679-100-9001	F1100AA01	1B1
-02	F2K011	F2B011	9679-101-9001	F1200AA01	1K1
-03	F2B021	F2A021	9679-100-9002	F1100AA03	2B1
-04	F2K021	F2B021	9679-101-9002	F1200AA03	2K1
-05	F2B031	F2A031	9679-100-9003	F1100AA03	3B1
-06	F2B031	F2B031	9679-101-9003	F1200AA03	3K1
-07	F2B051	F2A051	9679-100-9005	F1100AA06	5B1
-08	F2K051	F2B051	9679-101-9004	F1200AA06	5K1
-09	F2B101	F2A101	9679-100-9010	F1100AA10	10B1
-10	F2K101	F2B101	9679-101-9005	F1200AA10	10K1
-11	F2B201	F2A201	9679-100-9020	F1100AA20	20B1
-12	---	---	9679-101-9006	F1200AA20	20K1

TABLE II. Substitution data 1/ 2/ - Continued.

Part number WF2190/1	FSCM 23880	56289	93790	13619	02777	13050	19130
	Vendor part number						
-01	GA1A-1	1JX5101A	APF111L	RF5400-J01	F85002	600A2	RNF-1L1
-02	GA1B-1	1JX5201A	APF121L	RF5500-J01	F85036	605A2	RNF-1P1
-03	GA1A-2	2JX5102A	APF211L	RF5400-J02	F85008	600A2	RNF-2L1
-04	GA1B-2	2JX5202A	APF221L	RF5500-J02	F85042	605A2	RNF-2P1
-05	GA1A-3	3JX5103A	APF311L	RF5400-J03	F85014	600A5	RNF-3L1
-06	GA1B-3	3JX5203A	APF321L	RF5500-J03	F85048	605A5	RNF-3P1
-07	GA1A-5	5JX5104A	APF511L	RF5400-J05	F85020	600A5	RNF-5L1
-08	GA1B-5	5JX5204A	APF521L	RF5500-J05	F85054	605A5	RNF-5P1
-09	GA1A-10	10JX5105A	APF1011L	RF5400-J10	F85026	600A10	RNF-10L1
-10	GA1B-10	10JX5205A	APF1021L	RF5500-J10	F85060	605A10	RNF-10P1
-11	GA1A-20	20JX5106A	APF2011L	RF5400-J20	F85032	600A20	---
-12	GA1B-20	---	APF2021L	RF5500-J20	F85066	605A20	---

1/ Set of vendor part numbers is not necessarily complete. Additional vendor part numbers will be added as they become available.

2/ CAUTION. Do not use the vendor part number for item procurement. The similar vendor part number may not satisfy the performance requirements specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:37Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians

Army - ER
Navy - EC
Air Force - 85

Review Activities

Army - AR, MI
Navy - SH
Air Force - 11, 17, 99

User Activities

Army - AT, AV, ME
Navy - AS, MC, OS, YD
Air Force - 19

CIVIL AGENCY COORDINATING ACTIVITIES:

GSA - FSS
NCS -
NASA - MSF, LRC, JFK

PREPARING ACTIVITY:

DLA - ES

DOD project 5915-0271-1

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:37Z
Check the source to verify that this is the current version before use.