FEDERAL SPECIFICATION SHEET

FILTER, RADIO FREQUENCY INTERFERENCE

This specification was approved by the Assistant Administrator, Office of Federal Supply and Services, General Services Administration, for the use of all Federal agencies.

The complete requirements for procuring the filters described herein shall consist of this document and the latest issue of W-F-2190/GEN.

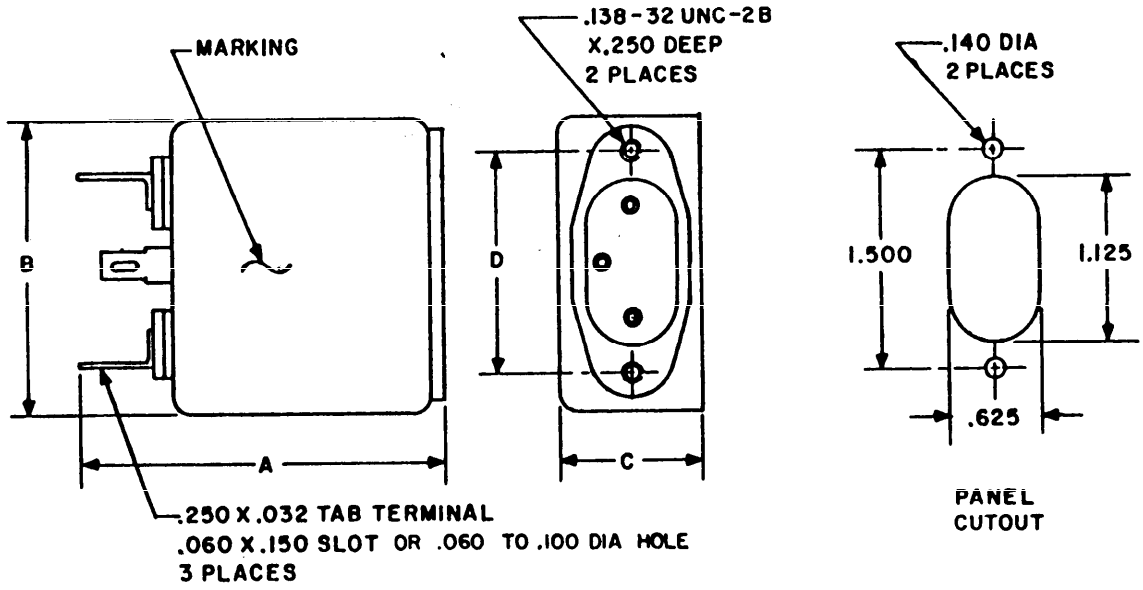



FIGURE 1. Case dimensions and electrical schematics.

FSC 5915

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:37Z
Check the source to verify that this is the current version before use.

INCHES	MM
.032	.81
.060	1.52
.140	3.56
.150	3.81
.250	6.35
.625	15.88
1.125	28.57
1.500	38.10

Part number WF2190/4	Maximum dimensions								Electrical schematic
	A		B		C		D		
	IN	MM	IN	MM	IN	MM	IN	MM	
-01	2.40	60.9	2.00	50.8	0.75	19.0	1.50	38.1	A
-02	2.65	67.3	2.00	"	0.88	22.3	1.50	"	B
-03	2.40	60.9	2.00	"	0.75	19.0	1.50	"	A
-04	2.65	67.3	2.00	"	0.88	22.3	1.50	"	B
-05	2.65	"	2.00	"	0.75	19.0	1.50	"	A
-06	2.65	"	2.00	"	1.13	28.7	1.50	"	B
-07	2.65	"	2.00	"	0.75	19.0	1.50	"	A
-08	2.65	"	2.00	"	1.13	28.7	1.50	"	B
-09	2.65	"	2.00	"	1.13	28.7	1.50	"	A

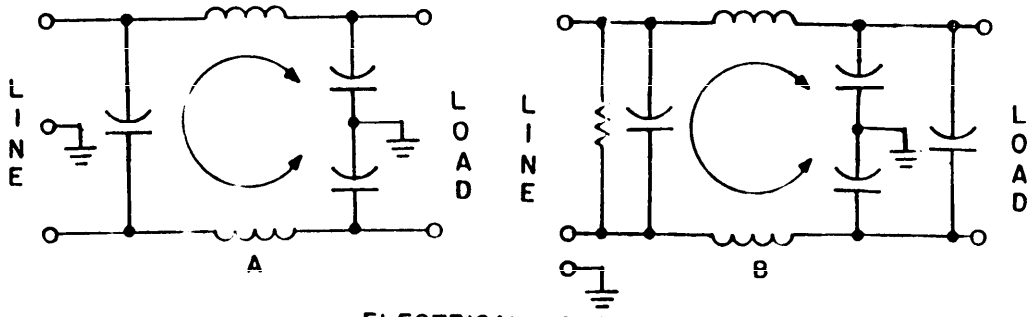

ELECTRICAL SCHEMATICS

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

FIGURE 1. Case dimensions and electrical schematics - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:37Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Dimension and electrical schematics: See figure 1.

Operating temperature range: 0°C to +65°C.

Maximum leakage current: As measured from either of the two input or output lines to the filter case, the maximum permissible leakage current shall not exceed 0.65 mA at 125 volts, 60 Hz or 1.25 mA at 250 volts, 50 Hz.

Voltage rating:

Rated at 125 volts, ac, over the frequency range of 0 to 400 Hz.

Rated at 250 volts, ac, over the frequency range of 0 to 60 Hz.

Rated current: See table I.

Insertion loss: In accordance with MIL-STD-220 and table I.

Part number: Shall be in accordance with table I and figure 1.

Substitution data: Filters covered by this specification replace commercial part numbers as specified in table II.

TABLE I. Current ratings and insertion loss.

Part number WF2190/4	Current rating (amperes per line)	Minimum no-load insertion loss (dB) at +25°C in accordance with MIL-STD-220				
		.15 MHz	.20 MHz	.50 MHz	10 MHz	20 MHz
-01	1.0	15	20	30	50	50
-02	1.0	15	20	30	"	"
-03	2.0	10	15	25	"	"
-04	2.0	10	15	25	"	"
-05	3.0	15	20	30	"	"
-06	3.0	15	20	30	"	"
-07	5.0	10	15	25	"	"
-08	5.0	"	"	"	"	"
-09	10.0	"	"	"	"	"

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:37Z
Check the source to verify that this is the current version before use.

TABLE II. Substitution data. 1/ 2/

Part number WF2190/4	FSCM				
	73631	05245	23880	56289	93790
	Vendor part number				
-01	---	1B4	CD1-2	1JX5101D	APF111CL
-02	---	1K4	CD1A-1	1JX5201D	APF121CL
-03	---	2B4	CD3-2	2JX5102D	APF211CL
-04	---	2K4	CD3-1A	2JX5202D	APF221CL
-05	---	3B4	CD2-3	3JX5103D	APF311CL
-06	---	3K4	CD1A-3	3JX5203D	APF321CL
-07	---	5B4	CD2-6	5JX5104D	APF511CL
-08	---	5K4	CD1A-6	5JX5204D	APF521CL
-09	F1200DD10	10B4	CD2-10	10JX5105D	APF1011C

TABLE II. Substitution data 1/ 2/ - Continued.

Part number WF2190/4	FSCM				
	13619	02777	13050	19130	12294
	Vendor part number				
-01	RF5400W01	F85005	600D2	RNF-1L6	9679-101-9051
-02	RF5500W01	F85039	605D2	RNF-1P6	9679-101-9061
-03	RF5400W02	F85011	600D2	RNF-2L6	9679-101-9052
-04	RF5500W02	F85045	605D2	RNF-2P6	9679-101-9062
-05	RF5400W03	F85017	600D5	RNF-3L6	9679-101-9053
-06	RF5500W03	F85051	605D5	RNF-3P6	9679-101-9063
-07	RF5400W05	F85023	600D5	RNF-5L6	9679-101-9054
-08	RF5500W05	F85057	606D5	RNF-5P6	9679-101-9064
-09	RF5400W10	F85029	600C10	RNF-10L6	9679-101-9055

1/ Set of vendor part numbers is not necessarily complete. Additional vendor part numbers will be added as they become available.

2/ CAUTION. Do not use the vendor part number for item procurement. The similar vendor part number may not satisfy the performance requirements specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:37Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians

Army - ER
Navy - EC
Air Force - 85

Review Activities

Army - AR, MI
Navy - SH
Air Force - 11, 17, 99

User Activities

Army - AT, AV, ME
Navy - AS, MC, OS, YD
Air Force - 19

CIVIL AGENCY COORDINATING ACTIVITIES:

GSA - FSS
NCS -
NASA - MSF, LRC, JFK

PREPARING ACTIVITY

DLA - ES

DOD project 5915-0271-1

U.S. GOVERNMENT PRINTING OFFICE : 1984 - 421- 95/5693

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:37Z
Check the source to verify that this is the current version before use.