FEDERAL SPECIFICATION SHEET

FILTER, RADIO FREQUENCY INTERFERENCE

This specification was approved by the Assistant Administrator, Office of Federal Supply and Services, General Services Administration, for the use of all Federal agencies.

The complete requirements for procuring the filters described herein shall consist of this document and the latest issue of W-F-2190/GEN.

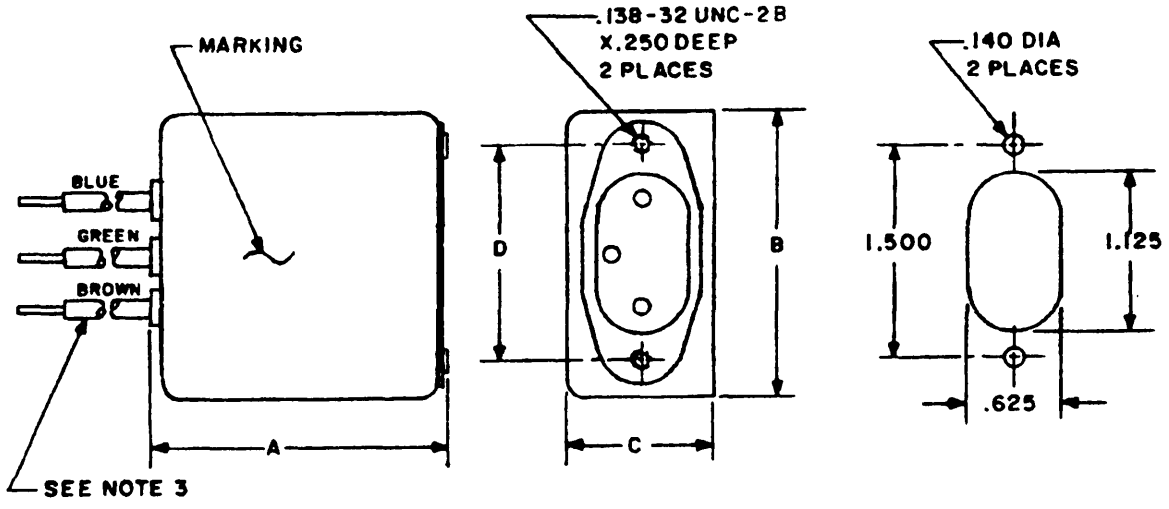



FIGURE 1. Case dimensions and electrical schematics.

FSC 5915

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:37Z
Check the source to verify that this is the current version before use.

INCHES	MM
.140	3.56
.250	6.35
.625	15.88
1.125	28.57
1.500	38.10

Part number MF2190/5	Maximum dimensions								Electrical schematic
	A		B		C		D		
	IN	MM	IN	MM	IN	MM	IN	MM	
-01	1.88	47.8	2.00	50.8	0.75	19.0	1.50	38.1	A
-02	2.13	54.1	2.00	"	0.88	22.3	1.50	"	B
-03	1.88	47.8	2.00	"	0.75	19.0	1.50	"	A
-04	2.13	54.1	2.00	"	0.88	22.3	1.50	"	B
-05	2.13	"	2.00	"	0.75	19.0	1.50	"	A
-06	2.13	"	2.00	"	1.13	28.7	1.50	"	B
-07	2.13	"	2.00	"	0.75	19.0	1.50	"	A
-08	2.13	"	2.00	"	1.13	28.7	1.50	"	B
-09	2.13	"	2.00	"	1.13	28.7	1.50	"	A

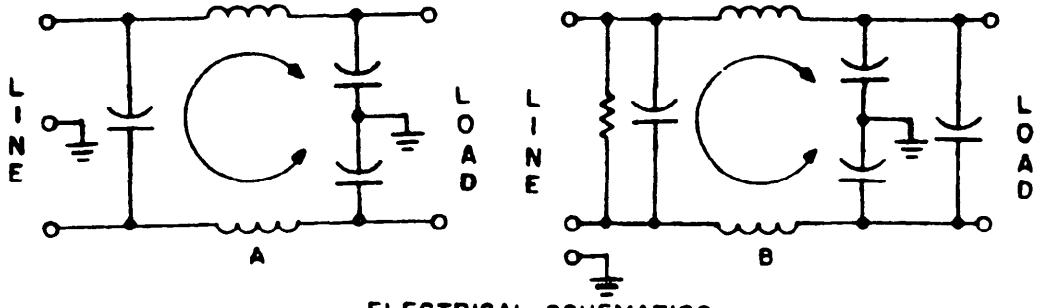

ELECTRICAL SCHEMATICS

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. All wire leads are 4.00 inches long, minimum (101.6 mm) of #20 AWG and shall be the color indicated.

FIGURE 1. Case dimensions and electrical schematics - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:37Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Dimension and electrical schematics: See figure 1.

Operating temperature range: 0°C to +65°C.

Maximum leakage current: As measured from either of the two input or output lines to the filter case, the maximum permissible leakage current shall not exceed 0.65 mA at 125 volts, 60 Hz or 1.25 mA at 250 volts, 50 Hz.

Voltage rating:

Rated at 125 volts, ac, over the frequency range of 0 to 400 Hz.

Rated at 250 volts, ac, over the frequency range of 0 to 60 Hz.

Rated current: See table I.

Insertion loss: In accordance with MIL-STD-220 and table I.

Part number: Shall be in accordance with table I and figure 1.

Substitution data: Filters covered by this specification replace commercial part numbers as specified in table II.

TABLE I. Current ratings and insertion loss.

Part number WF2190/5	Current rating (amperes per line)	Minimum no-load insertion loss (dB) at +25°C in accordance with MIL-STD-220				
		.15 MHz	.20 MHz	.50 MHz	10 MHz	20 MHz
-01	1.0	15	20	30	50	50
-02	1.0	15	20	30	"	"
-03	2.0	10	15	25	"	"
-04	2.0	10	15	25	"	"
-05	3.0	15	20	30	"	"
-06	3.0	5	20	30	"	"
-07	5.0	10	15	25	"	"
-08	5.0	"	"	"	"	"
-09	10.0	"	"	"	"	"

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:37Z
Check the source to verify that this is the current version before use.

TABLE II. Substitution data. 1/ 2/

Part number WF2190/5	FSCM				
	05245	23880	56289	93790	13619
	Vendor part number				
-01	1B5	CE1-2	1JX5101E	APF111CW	RF5400-X01
-02	1K5	CE1A-1	1JX5201E	APF121CW	RF5500-X01
-03	2B5	---	2JX5102E	APF211CW	RF5400-X02
-04	2K5	---	2JX5202E	APF221CW	RF5500-X02
-05	3B5	CE2-3	3JX5103E	APF311CW	RF5400-X03
-06	3K5	CE1A-3	3JX5203E	APF321CW	RF5500-X03
-07	5B5	CE2-6	5JX5104E	APF511CW	RF5400-X05
-08	5K5	CE1A-6	5JX5204E	APF521CW	RF5500-X05
-09	10B5	CE2-10	10JX5105E	APF1011CW	RF5400-X10

TABLE II. Substitution data 1/ 2/ - Continued.

Part number WF2190/5	FSCM			
	02777	13050	19130	12294
	Vendor part number			
-01	F85006	600E2	RNF-1L7	9679-101-9071
-02	F85040	605E2	RNF-1P7	9679-101-9081
-03	F85012	600E2	RNF-2L7	9679-101-9072
-04	F85046	605E2	RNF-2P7	9679-101-9082
-05	F85018	600E5	RNF-3L7	9679-101-9073
-06	F85052	605E5	RNF-3P7	9679-101-9083
-07	F85024	600E5	RNF-5L7	9679-101-9074
-08	F85058	605E5	RNF-5P7	9679-101-9084
-09	F85030	600E10	RNF-10L7	9679-101-9075

1/ Set of vendor part numbers is not necessarily complete. Additional vendor part numbers will be added as they become available.

2/ CAUTION. Do not use the vendor part number for item procurement. The similar vendor part number may not satisfy the performance requirements specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:37Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians

Army - ER
Navy - EC
Air Force - 85

Review Activities

Army - AR, MI
Navy - SH
Air Force - 11, 17, 99

User Activities

Army - AT, AV, ME
Navy - AS, MC, OS, YD
Air Force - 19

CIVIL AGENCY COORDINATING ACTIVITIES:

GSA - FSS
NCS -
NASA - MSF, LRC, JFK

PREPARING ACTIVITY:

DLA - ES

DOD project 5915-0271-5

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:37Z
Check the source to verify that this is the current version before use.