MIL-HDBK-173A
11 September 1973

SUPERSEDING

MIL-HDBK-173
24 June 1966

DEPARTMENT OF THE ARMY TECHNICAL MANUAL 11-487M
MILITARY STANDARDIZATION HANDBOOK

AUDIO EQUIPMENT

FSC 5965

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF DEFENSE
Washington, D.C. 20301

MIL-HDBK-173
Audio Equipment

1. This standardization handbook was developed by the Department of Defense with the assistance of Industry in accordance with established procedures.

2. This publication was approved on 11 September 1973 for printing and inclusion in the military standardization handbook series.

3. This document provides basic and fundamental information on audio equipment including chest-sets, handsets, headsets, loudspeakers and microphones. It provides information and guidance to personnel concerned with selection of the above items used with audio amplifiers, intercommunication and radio receiving equipment. The handbook is not intended to be referenced in purchase specifications except for informational purposes, nor shall it supersede any specification requirements.

4. Every effort has been made to reflect the latest information on audio equipment. It is the intent to review this handbook periodically to insure its completeness and currency. Users of this document are encouraged to report any errors discovered and any recommendations for changes or inclusions to the U.S. Army Electronics Command (AMSEL-RD-ET-3), Ft. Monmouth, N.J. or to the Defense Electronics Supply Center (DESC-EMD), Dayton, Ohio 45444.



Source: https://assist.dla.mil -- Downloaded: 202610-26T13:37Z
Check the source to verify that this is the current version before use.

CONTENTS

(Sections numerically listed by Federal Stock Number)

Section		Page
1	INTRODUCTION (General Information, Purpose, and Scope)	1.1.1
2	CHEST SETS, ELECTRICAL	2.1.1
	(Alphabetical/numerical listing)	2.1.1
	Federal stock number — Item name/part number	
	5965-164-8076 — Chest Set H-18/GT	2.3.1
	5965-329-9085 — Chest Set AN/GSA-6( )	2.2.1
3	LOUDSPEAKERS, PERMANENT MAGNET	3.1.1
	(Alphabetical/numerical listing)	3.1.1
	Federal stock number — Item name/part number	
	5965-011-3639 — Loudspeaker LS-590 ( )/U	3.11.1
	5965-128-2974 — Loudspeaker P5V	3.9.1
	5965-221-5775 — Loudspeaker AP-11-ST592	3.4.1
	5965-243-6420 — Loudspeaker LS-166/U	3.5.1
	5965-252-0803 — Loudspeaker NT-491814	3.27.1
	5965-280-3808 — Loudspeaker LS-180/U	3.8.1
	5965-280-8475 — Loudspeaker LS-116/U	3.3.1
	5965-284-6579 — Loudspeaker LS-306 ( )/SIC	3.25.1
	5965-284-6708 — Loudspeaker P5T-C5696; 612833	3.10.1
	5965-296-2547 — Loudspeaker LS-169/G	3.24.1
	5965-296-6052 — Loudspeaker PM-69E	3.14.1
	5965-518-4343 — Loudspeaker LS-170 ( )/PFP-1	3.15.1
	5965-518-4344 — Loudspeaker 12984	3.16.1
	5965-519-6610 — Loudspeaker SK8163	3.17.1
	5965-543-0264 — Loudspeaker 3A070T	3.18.1
	5965-581-9978 — Loudspeaker SP8B	3.19.1
	5965-583-4106 — Loudspeaker LS-450/B	3.20.1
	5965-588-4870 — Loudspeaker LS-455/U	3.7.1
	5965-615-0758 — Loudspeaker LS-444/WIH	3.22.1
	5965-636-1761 — Loudspeaker LS-215 ( )/U	3.23.1
	5965-636-2462 — Loudspeaker LS-305 ( )/SIC	3.25.1
	5965-876-2375 — Loudspeaker LS-454/U	3.2.1
	5965-879-1159 — Loudspeaker LS-446/U	3.12.1
	5965-892-3597 — Loudspeaker LS-474/U	3.26.1
	5965-892-3665 — Loudspeaker LS-445/U	3.6.1

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:37Z
Check the source to verify that this is the current version before use.

CONTENTS (Continued)

(Sections numerically listed by Federal Stock Number)

Section			Page
4	HEADSETS		4.1.1
	(Alphabetical/numerical listing)		4.1.1
	Federal stock number	Item name/part number	
	5965-043-3460	H-251/U	4.16.1
	5965-084-0531	H-139 ( )/GR	4.8.1
	5965-116-5363	H-226/PPS-5	4.14.1
	5965-160-1055	HS-16A	4.17.1
	5965-160-2451	716D	4.22.1
	5965-170-4815	"A" #200	4.2.1
	5965-222-0282	H-32 ( )/U	4.4.1
	5965-223-4572	H-65 ( )/U	4.6.1
	5965-226-2915	H-227 ( )/U	4.15.1
	5965-243-7782	H-16 ( )/U	4.3.1
	5965-253-1302	P-104J535-1	4.20.1
	5965-256-8687	24076	4.23.1
	5965-280-3629	NT-49985A	4.19.1
	5965-284-8925	159	4.21.1
	5965-285-0745	NT-49507B	4.18.1
	5965-504-6370	H-113/U	4.7.1
	5965-542-7125	H-171 ( )/G	4.11.1
	5965-651-7372	H-43B/U	4.5.1
	5965-682-2575	H-183 ( )/U	4.12.1
	5965-841-1372	H-158/AIC	4.10.1
	5965-856-0552	H-154/AIC	4.9.1
	5965-892-3353	H-216 ( )/U	4.13.1
5	HEADSET - MICROPHONES		5.1.1
	(Alphabetical/numerical listing)		5.1.1
	Federal stock number	Item name/part number	
	5965-069-8885	Headset - Microphone H-182( )/PT	5.13.1
	5965-082-4037	Headset - Microphone H-161C/GR	5.10.1
	5965-221-0999	Headset - Microphone H-66/U	5.4.1
	5965-237-8048	Headset - Microphone H-62/U	5.2.1
	5965-237-8049	Headset - Microphone H-63/U	5.3.1
	5965-583-4865	Headset - Microphone H-108B/U	5.7.1
	5965-627-8382	Headset - Microphone H-101A/U	5.6.1
	5965-669-6871	Headset - Microphone H-91A/U	5.5.1
	5965-670-2931	Headset - Microphone H-163/U	5.11.1
	5965-682-2769	Headset - Microphone H-144C/U	5.8.1
	5965-715-4031	Headset - Microphone H-172/U	5.12.1
	5965-755-4656	Headset - Microphone H-157/AIC	5.9.1
	5965-892-1068	Headset - Microphone H-210/G	5.14.1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

CONTENTS (Continued)

(Sections numerically listed by Federal Stock Number)

Section		Page
6	HEADSET - CHEST SETS	6.1.1
	(Alphabetical/numerical listing)	6.1.1
	Federal stock number — Item name/part number	
	5965-243-0146 — Headset-Chest Set H-36/U	6.5.1
	5965-501-2938 — Headset-Chest Set H-44/U	6.4.1
	5965-587-0767 — Headset-Chest Set H-25/GT	6.3.1
	5965-900-6401 — Headset-Chest Set H-200/U	6.2.1
	5965-940-8699 — Headset-Chest Set H-202/U	6.2.1
7	HANDSETS	7.1.1
	(Alphabetical/numerical listing)	7.1.1
	Federal stock number — Item name/part number	
	5965-043-3463 — Handset H-250/U	7.18.1
	5965-163-9947 — Handset H-33F/PT	7.6.1
	5965-164-6632 — Handset H-94( )/U	7.9.1
	5965-170-6473 — Handset TS-9( )	7.19.1
	5965-249-8157 — Handset A257-2	7.2.1
	5965-294-6113 — Handset A555	7.3.1
	5965-543-1837 — Handset H-165( )/U	7.14.1
	5965-642-8997 — Handset H-121( )/U	7.11.1
	5965-644-0333 — Handset H-111( )/U	7.10.1
	5965-644-0334 — Handset H-90( )/U	7.8.1
	5965-665-3480 — Handset NT-51007A	7.20.1
	5965-669-9145 — Handset H-60( )/PT	7.7.1
	5965-679-9501 — Handset H-169/U	7.15.1
	5965-686-7067 — Handset H-207( )/VRC	7.17.1
	5965-808-6261 — Handset A560/S50	7.5.1
	5965-816-7984 — Handset A560/S10	7.4.1
	5965-840-8849 — Handset H-203/U	7.16.1
	5965-892-0972 — Handset H-138( )/U	7.12.1
	5965-892-3850 — Handset H-156( )/U	7.13.1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

CONTENTS (Continued)

(Sections numerically listed by Federal Stock Number)

Section			Page
8	MICROPHONES		8.1.1
	(Alphabetical/numerical listing)		8.1.1
	Federal stock number	Item name/part number	
	5965-013-7560	Microphone M-31( )/U	8.5.1
	5965-162-8287	Microphone M-24( )/U	8.4.1
	5965-170-4794	Microphone M-23( )/U	8.3.1
	5965-170-4832	Microphone M-11( )/U	8.2.1
	5965-179-7762	Microphone M-80C/U	8.9.1
	5965-296-2686	Microphone M-35( )/U	8.6.1
	5965-296-3117	Microphone M-65( )/U	8.8.1
	5965-431-2476	Microphone M-103/AIC	8.16.1
	5965-524-5520	Microphone M-56( )/G	8.7.1
	5965-752-5820	Microphone M-110/U	8.17.1
	5965-755-4643	Microphone M-87/A1C	8.10.1
	5965-843-9957	Microphone M-101/AIC	8.14.1
	5965-845-6325	Microphone M-92C/U	8.11.1
	5965-854-0658	Microphone M-100/AIC	8.13.1
	5965-857-6622	Microphone M-102/AIC	8.15.1
	5965-900-8102	Microphone M-133( )/U	8.18.1
	5965-978-2795	Microphone M-94A/A	8.12.1
9	LOUDSPEAKERS, HORN AND DIAPHRAGM		9.1.1
	(Alphabetical/numerical listing)		9.1.1
	Federal stock number	Item name/part number	
	5965-128-2983	Loudspeaker LS-103( )/TIQ-2	9.2.1
	5965-221-5786	Loudspeaker LS-104( )/TIQ-3	9.3.1
	5965-284-7456	Loudspeaker M15	9.6.1
	5965-296-1808	Loudspeaker, LS-387/SIC	9.5.1
	5965-296-3398	Loudspeaker NT-49546	9.7.1
	5965-608-0130	Loudspeaker LS-211/AIC-13	9.4.1
	5965-636-2181	Loudspeaker LS-388/SIC	9.5.1

Source: https://assist.dla.mil -- Downloaded: 202640-26T13:37Z
Check the source to verify that this is the current version before use.

SECTION 1

INTRODUCTION

1. GENERAL INFORMATION

1.1 Purpose.

a. To provide a handbook, intended as a guide, to assist designers in the selection of parts and to furnish reference material that will serve to further the Standardization Program.

b. To outline criteria pertaining to the use, choice, and application of audio equipment for military functions.

1.2 Scope. This handbook consists of audio equipment that is used by the Army, Navy, and Air Force.

1.3 Drawing configurations. The drawings used in this handbook are typical and are not necessarily the exact configuration for each item of equipment.

1.4 Data not available. Blank spaces have been left under appropriate headings to permit the user of this publication to enter any data that could not be determined during preparation.

1.5 Page numbering. The page-numbering sequence was established to make possible further additions or deletions to this handbook without disrupting the initial page-numbering sequence.

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:37Z
Check the source to verify that this is the current version before use.

SECTION 2

CHEST SETS


Nomenclature, model or part number	Page
AN/GSA-6( )	2.2.1
H-18/GT	2.3.1

Source: https://assist.dla.mil -- Downloaded: 202640-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: CHEST SET

NOMENCLATURE: AN/GSA-6( )

FEDERAL STOCK NO: 5965-329-9085

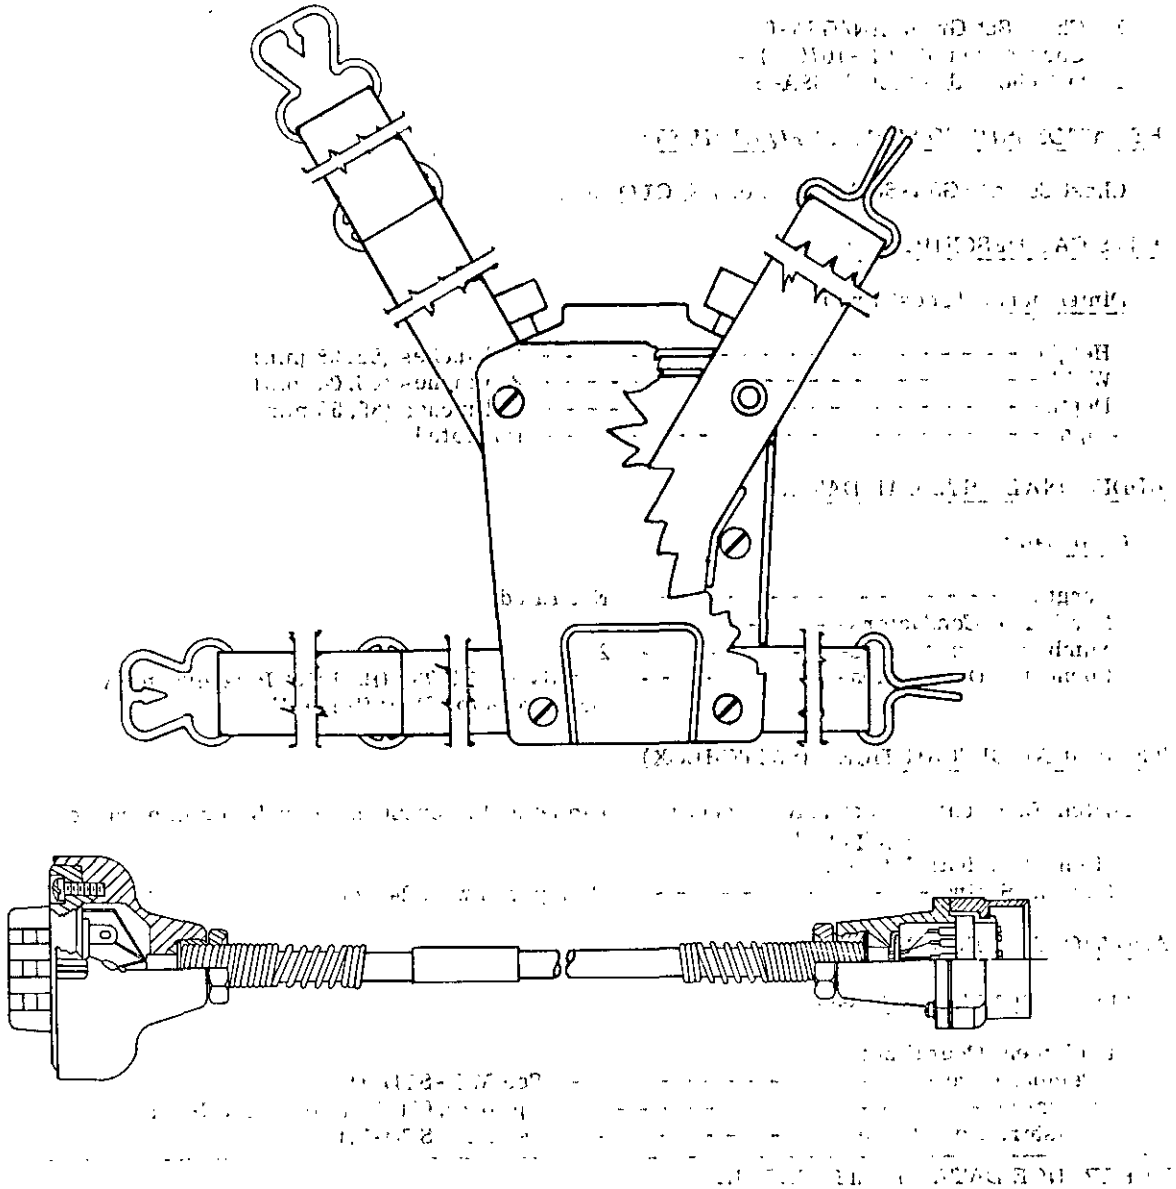

FUNCTIONAL DESCRIPTION:

Chest Set Group AN/GSA-6( ) is an assembly of Switchbox SA-142( )/GSA-6 and Cord Assembly CX-1070( )/4. This equipment incorporates a means of selectively connecting a headset and microphone to radio or interphone equipment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: CHEST SET

NOMENCLATURE: AN/GSA-6( ) (Cont)

FEDERAL STOCK NO: 5965-329-9085

CONSISTS OF:

1 Chest Set Group AN/GSA-6
1 Cord Assembly CX-1070( )/4
1 Switchbox SA-142( )/GSA-6

RELATIONSHIP TO SIMILAR EQUIPMENT:

Chest Set AN/GSA-6( ) is part of AN/GLQ-2( )

PHYSICAL DESCRIPTION:

Dimensions: (Chest Unit)

Height	3.7 inches (93.98 mm)
Width	2.5 inches (66.04 mm)
Depth	1.4 inches (35.56 mm)
Weight	Not rated

ADDITIONAL PHYSICAL DATA:

Cord Data:

Length	Not rated
Number of Conductors	8
Number of Connectors	2
Connector Designation	Per SM-C-146931 (Bail Out Plug Assembly) and Connector Plug U-161/U

TECHNICAL DESCRIPTION: (SWITCHBOX)

Switch Function: Selectively connecting a headset and microphone to radio or interphone equipment

Switch Electrical Ratings:

Current Rating	2 amperes with 24 Vdc

ADDITIONAL TECHNICAL DATA:

Environmental Limitations:

Equipment Operating:

Temperature	See MIL-STD-169
Elevation	Up to 10,000 feet above sea level
Moisture Resistance	See MIL-STD-170

REFERENCE DATA and LITERATURE

MIL-C-13113


MANUFACTURER CODE	PART NUMBER
80058	AN/GSA-6( )

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: CHEST SET

NOMENCLATURE: H-18/GT

FEDERAL STOCK NO: 5965-164-8076

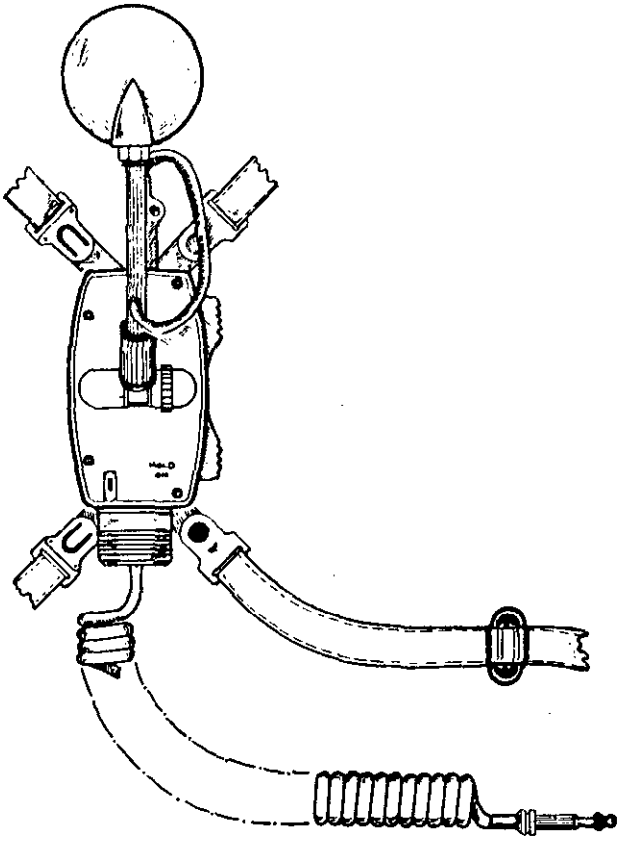

FUNCTIONAL DESCRIPTION:

Chest Set, electrical, H-18/GT is a telephone type transmitter mounted on a chest plate by an adjustable steel arm. This equipment is used with Radio Set AN/CRD-2, Radio Set AN/TTG-1, Switchboard BD-71, Switchboard BD-72, Switchboard BD-91, Switchboard BD-101, Flash Range Set GR-4, Flash Range Set GR-8, Radio Set AN/TRL, Switchboard BD-110, Radar Set AN/FPG-2; Telephone Central Office Set TC-1, Telephone Central Office Set TC-2, and Telephone Central Set TC-4.

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: CHEST SET
NOMENCLATURE: H-18/GT (Cont)
FEDERAL STOCK NO: 5965-164-8076

CONSISTS OF:

1 Chest Unit H-17/GT
1 Cord CX-67/GR
1 Signal Strap ST-25, ST-24
1 Switch
1 Connector

RELATIONSHIP TO SIMILAR EQUIPMENT: Chest Set H-28/GR

PHYSICAL DESCRIPTION:

Dimensions: (Chest Unit)

Height	6 inches (152.40 mm)
Width	2-1/4 inches (57.15 mm)
Depth	4-1/2 inches (114.30 mm)
Weight	Not rated

ADDITIONAL PHYSICAL DATA:

Microphone Data:

Type	Carbon
Mounting	Chest Plate Mounted

Cord Data:

Length	Not rated
No. of Conductors	3
No. of Connectors	2
Connector Designation	JK-53 Plug (Chest Set End) U-31/GT (System End)

TECHNICAL DESCRIPTION: (MICROPHONE)

Frequency Range - 600 to 3,000 Hz

TECHNICAL DESCRIPTION: (SWITCHBOX)

Switch Function: Connects Microphone circuit and control circuit contacts
Switch Electrical Ratings:

Current Rating	2 amperes control circuit 150 mA microphone circuit
Connector Designation	Microphone Jack mates with Plug PL-291 Headset Jack mates with Plug PL-54

Source: https://assist.dla.mil -- Downloaded: 202640-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: CHEST SET

NOMENCLATURE: H-18/GT (Cont)

FEDERAL STOCK NO: 5965-164-8076

ADDITIONAL TECHNICAL DATA:

Environmental Limitations:

Equipment Operating:

Temperature	-80° F to +160° F
Elevation	Up to 10,000 feet above sea level
Relative Humidity	Up to 100 percent including condensation caused by temperature changes
Vibration	No mechanical resonance below 55 Hz

REFERENCE DATA and LITERATURE

MIL-C-13064
MIL-M-13189
SC-D-17105
ARCS Research and Development Corp Standardization of Chest Sets Purification Report Contract DA 36-039, SC66416, Final Report Technical Analysis Phase Contract DA 36-039, SC66416
MSS 5965-2

MANUFACTURER CODE	PART NUMBER
80058	H-18/GT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

SECTION 3

CONE TYPE

LOUDSPEAKERS


Nomenclature, model or part number	Page
AP-11-ST592	3.4.1
LS-116/U	3.3.1
LS-166/U	3.5.1
LS-169/G	3.24.1
LS-170( )/PFP-1	3.15.1
LS-180/U	3.8.1
LS-215( )/U	3.23.1
LS-305( )/SIC, LS-306( )/SIC	3.25.1
LS-444/WIH	3.22.1
LS-445/U	3.6.1
LS-446/U	3.12.1
LS-447/U	3.13.1
LS-448/U	3.21.1
LS-450/B	3.20.1
LS-454/U	3.2.1
LS-455/U	3.7.1
LS-474/U	3.26.1
LS-590( )/U	3.11.1
NT-491814	3.27.1
PM-69E	3.14.1
P5T-C5696	3.10.1
SK8163	3.17.1
SP8B	3.19.1
3A070T	3.18.1
5PV	3.9.1
12984	3.16.1
612833	3.10.1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: LOUDSPEAKER

NOMENCLATURE: LS-454/U

FEDERAL STOCK NO: 5965-876-2375

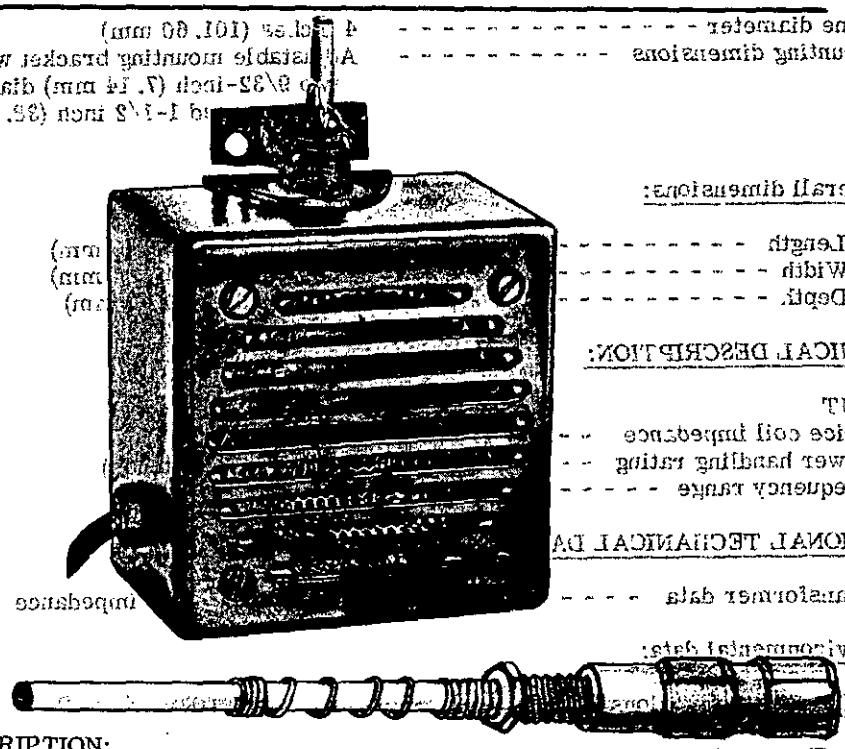

FUNCTIONAL DESCRIPTION:

This unit is a 4-inch, direct radiator, dynamic type loudspeaker. It is housed in a metal inclosure and is resistant to weather, gun-blast, immersion, humidity, temperature extremes, and bounce. The unit is intended for use with ground service tactical equipments where resistance to gunfire and immersion are requirements.

CONSISTS OF:

1 Loudspeaker Unit - Type LS-445/U.
1 Cabinet - Metal-with-Adjustable Clamp.
1 Cord - Type COS-2(23).
1 Plug - Type U229/U.
1 Transformer - In Case.

RELATIONSHIP TO SIMILAR EQUIPMENT:

This speaker is similar to the LS-590/U and the LS-166/U.

MANUFACTURER CODE	PART NUMBER
80058	
81771	LS-454/U
06818	LS-454/U
23001	LS-454/U
74201	LS-454/U
87771	LS-454/U

Source: https://assist.dla.mil -- Downloaded: 2026-04-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: LOUDSPEAKER

NOMENCLATURE: LS-454/U (Cont)

PHYSICAL DESCRIPTION:

Cone diameter	4 inches (101.60 mm)
Mounting dimensions	Adjustable mounting bracket with two 9/32-inch (7.14 mm) diameter holes spaced 1-1/2 inch (38.10 mm) center to center

Overall dimensions:

Length	7.031 inches (178.59 mm)
Width	5.656 inches (143.66 mm)
Depth	3.312 inches (84.12 mm)

TECHNICAL DESCRIPTION:

INPUT

Voice coil impedance	8 ohms
Power handling rating	2 watts (warble tones)
Frequency range	300 to 7,000 Hz

ADDITIONAL TECHANICAL DATA:

Transformer data	600 ohms primary impedance

Environmental data:

Operating conditions:

Temperature	From -65°F to +160°F
Elevation	5,000 feet above sea level
Relative humidity	95 percent

Nonoperating conditions:

Temperature	From -80°F to +160°F for 72 hours
Elevation	50,000 feet above sea level
Relative humidity	100 percent

REFERENCE DATA AND LITERATURE

MIL-L-12632; MIL-L-12606


MANUFACTURER CODE	PART NUMBER
80058	LS-454/U
80063	LS-454/U
87771	LS-454/U
04848	LS-454/U
32001	LS-454/U
74201	LS-454/U
87771	LS-454/U

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: LOUDSPEAKER

NOMENCLATURE: LS-116/U

FEDERAL STOCK NO: 5965-280-8475

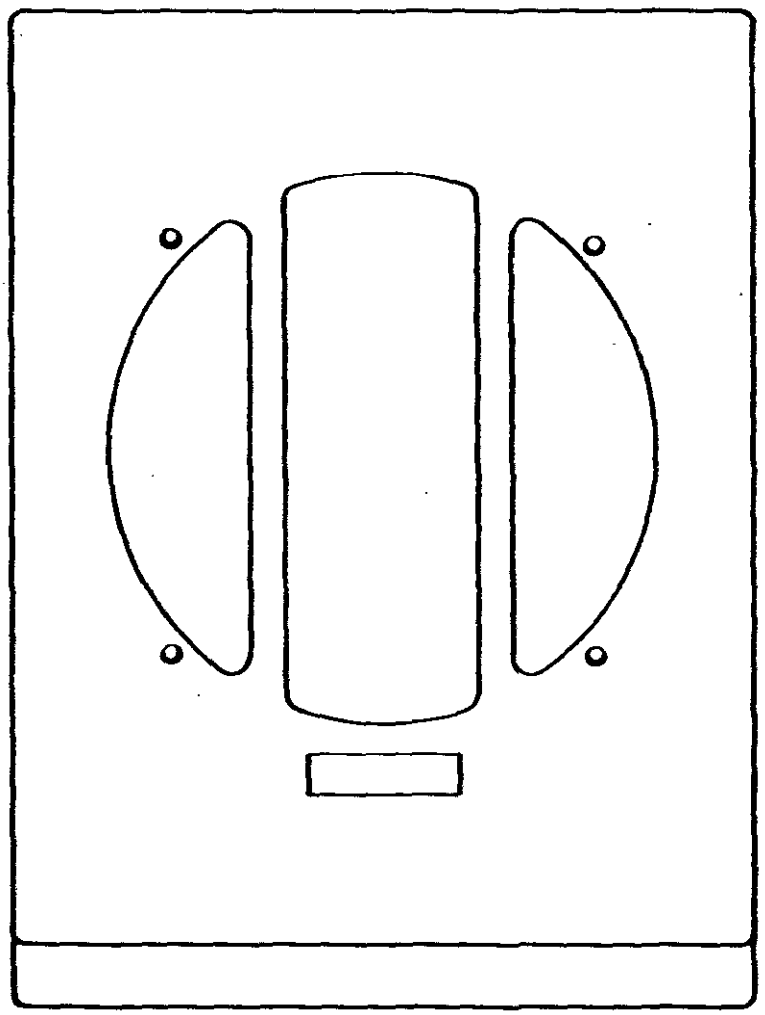

FUNCTIONAL DESCRIPTION:

The LS-116/U is a permanent magnet 12 inch loudspeaker mounted in a wooden cabinet. It is intended for use in the reproduction of speech or music from radio equipment, recorder-reproducers or public address systems.

CONSISTS OF:

1 Loudspeaker LS-448/U
1 12 Inch Loudspeaker
1 Output Transformer
1 Cable Assembly
1 Terminal Board and Cable Assembly
1 Cabinet

RELATIONSHIP TO SIMILAR EQUIPMENT:

Source: https://assist.dla.mil -- Downloaded: 202640-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: LOUDSPEAKER

NOMENCLATURE: LS-116/U (Cont)

FEDERAL STOCK NO: 5965-280-8475

PHYSICAL DESCRIPTION:

Nominal Diameter	12 inches (304.80 mm)
Mounting Dimensions	2 mounting brackets with 1/4 inch slotted hole located on the top spaced 8-3/16 inches center to center; 1 mounting bracket with 3/16 inch diameter hole located on the bottom
Over-all Dimensions:	
Length	17.312 inches (439.72 mm)
Width	9.75 inches (247.65 mm)
Height	14.625 inches (371.48 mm)

ADDITIONAL PHYSICAL DATA:

Cabinet Data	Completely inclosed in a "tilt-type" wall cabinet with the front opening covered with grille cloth

TECHNICAL DESCRIPTION:

INPUT	
Voice coil impedance	8 ohms
Power handling rating	14 watts normal; 20 watts peak (warble tones)
Frequency range	150 to 7,000 Hz.

ADDITIONAL TECHINCAL DATA:

Input Transformer Data	Primary winding is tapped to provide impedances of 500/1,000/1,500/2,000 ohms ±10 percent at 1,000 cps when an 8 ohm loudspeaker is connected to the secondary winding and has a power handling capacity of 14 watts at 1,000 Hz.

ENVIRONMENTAL DATA:

Operating Conditions:	
Temperature	From -65°F to +160°F
Elevation	Up to 10,000 feet above sea level
Relative Humidity	Up to 95 percent
Salt-Laden Air	As encountered in coastal regions
Nonoperating Conditions:	
Temperature	From -80°F to +160°F for 72 hours
Elevation	Up to 50,000 feet above sea level
Relative Humidity	Up to 100 percent

REFERENCE DATA and LITERATURE

MIL-L-13078
MIL-L-10911
Final Report-Standardization of Loudspeakers Prepared by Stromberg-Carlson


MANUFACTURER CODE	PART NUMBER
80063	LS-116/U

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: LOUDSPEAKER

NOMENCLATURE: COMMERCIAL AP-11-ST592

FEDERAL STOCK NO: 5965-221-5775



MANUFACTURER CODE	PART NUMBER
32001	AP-11-ST592

Source: https://assist.dla.mil -- Downloaded: 202640-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: LOUDSPEAKER

NOMENCLATURE: COMMERCIAL AP-11-ST592 (Cont)

FEDERAL STOCK NO: 5965-221-5775

CONSISTS OF:

1 Loudspeaker, Permanent Magnet Jensen Mfg. Co., Part No. AP-11-ST592

RELATIONSHIP TO SIMILAR EQUIPMENT:

This loudspeaker is similar to Jensen Mfg. Co. Loudspeaker Model AP-10-ST590 except that it does not have a mounting base.

PHYSICAL DESCRIPTION:

Nominal Diameter	5 inches (127.00 mm)
Mounting Dimensions	8 holes 1/4 inch diameter equally spaced on 4-3/4 inch mounting diameter.

Over-all dimensions:

Diameter	5 inches (127.00 mm)
Depth	5.125 inches (130.18 mm)
Weight	1-1/4 pounds

ADDITIONAL PHYSICAL DATA:

Case Finish	Gray Hammer

TECHNICAL DESCRIPTION:

INPUT

Voice coil impedance	3 to 4 ohms
Power handling rating	5 watts maximum (warble tones)
Frequency range	Not Rated

REFERENCE DATA and LITERATURE

Jensen Mfg. Company Catalog 1070-B and 1070
MSS 5965-6


MANUFACTURER CODE	PART NUMBER
32001	AP-11-ST592

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: LOUDSPEAKER

NOMENCLATURE: LS-166/U

FEDERAL STOCK NO: 5965-243-6420

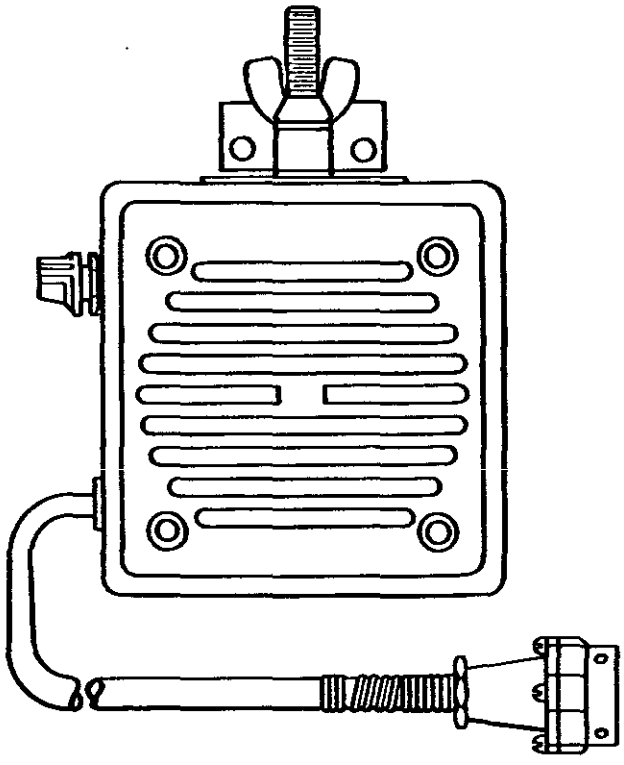

FUNCTIONAL DESCRIPTION:

This unit is a four inch, direct radiator, dynamic type loudspeaker. It is housed in a metal inclosure and is resistant to weather, gunblast, immersion, humidity, temperature extremes, and bounce. The unit is intended for use with ground service tactical equipments where resistance to gun-fire and immersion are requirements.

CONSISTS OF:

1 Permanent Magnet Loudspeaker LS-448/U
1 Cable CX-1576/U

RELATIONSHIP TO SIMILAR EQUIPMENT:

PHYSICAL DESCRIPTION:

Cone Diameter	4 inches (101.60 mm)
Mounting Dimensions	Adjustable mounting bracket with two 9/32 inch diameter holes spaced 1-1/2 inch C to C
Plug	U-77/U

Over-all Dimensions:


Length	7.031 inches (178.59 mm)
Width	5.656 inches (143.66 mm)
Depth	3.312 inches (84.12 mm)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: LOUDSPEAKER

NOMENCLATURE: LS-166/U (Cont)

FEDERAL STOCK NO: 5965-243-6420



ADDITIONAL PHYSICAL DATA:

Case Material - - - - - - - - - Metal

TECHNICAL DESCRIPTION:

INPUT

Voice coil impedance - - - -	8 ohms
Power handling rating - - - -	2 watts (warble tones)
Frequency range - - - - - - -	300 to 7,000 Hz

ADDITIONAL TECHNICAL DATA:

Transformer Data - - - - - - - - 600-ohms primary impedance

Environmental Data:

Operating Conditions:

Temperature - - - - - - - -	From -65°F to +160°F
Elevation - - - - - - - - -	5,000 feet above sea level
Relative Humidity - - - -	95 percent

Nonoperating Conditions:

Temperature - - - - - -	From -80°F to +160°F for 72 hours
Elevation - - - - - - - - -	50,000 feet above sea level
Relative Humidity - - - -	100 percent

REFERENCE DATA and LITERATURE

MIL-L-12632
MSS 5965-6


MANUFACTURER CODE	PART NUMBER
80058 80063 87771	LS-166/U LS-166/U LS-166/U

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: LOUDSPEAKER

NOMENCLATURE: LS-445/U

FEDERAL STOCK NO: 5965-892-3665

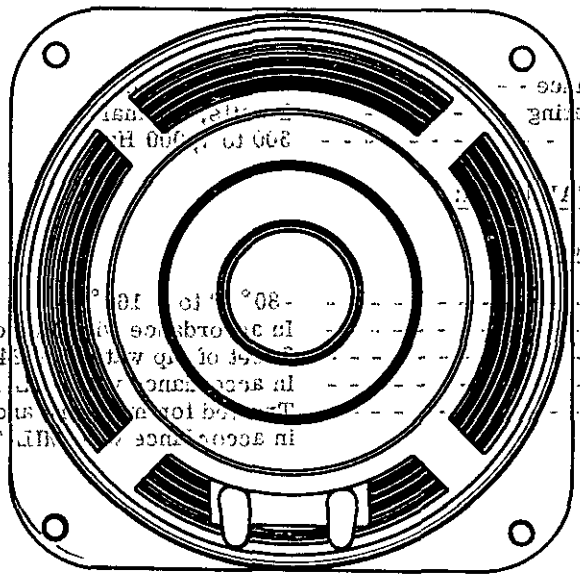

FUNCTIONAL DESCRIPTION:

Loudspeaker LS-445/U is an unencased, 2-watt, gunblast and immersion resistant permanent magnet type loudspeaker unit. It has a 4-inch diameter cone with a voice coil impedance of 8 ohms.

CONSISTS OF:

1	Permanent Magnet Loudspeaker	LS-445/U

RELATIONSHIP TO SIMILAR EQUIPMENT:

This is the loudspeaker unit of LS-454/U, LS-166/U and LS-590 ( )/U.

PHYSICAL DESCRIPTION:

Diameter - 4 inches (101.60 mm)

Mounting Dimensions:

Four number 10 - 24 thd tapped holes on 3-5/16 inch by 3-5/16 inch mounting centers.

Terminal/Connector Designation - - - - - Two Solder Type terminals

Over-all Dimensions:

Length - - - - -	4 inches	(101.60 mm)
Width - - - - -	4 inches	(101.60 mm)
Depth - - - - -	2.375 inches (maximum)	(60.33 mm)
Weight - - - - -	1/2 pounds	

Source: https://assist.dla.mil -- Downloaded: 202640-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: LOUDSPEAKER

NOMENCLATURE: LS-445/U (Cont)

FEDERAL STOCK NO: 5965-892-3665

TECHNICAL DESCRIPTION:

INPUT

Voice coil impedance	8 ohms ±1 ohm
Power handling rating	2 watts, normal
Frequency range	300 to 7,000 Hz

ADDITIONAL TECHNICAL DATA:

Environmental Service:

Temperature	-80° F to + 160° F
Moisture	In accordance with Method 106, of MIL-STD-202
Immersion	3 feet of tap water for 24 hours
Bounce	In accordance with MIL-L-12606
Fungus	Treated for moisture and fungus resistance in accordance with MIL-T-152

REFERENCE DATA and LITERATURE

MSS 5965-6
MIL-L-12606
Pricing Guide for Signal Corps Equipment SIG 5-5


MANUFACTURER CODE	PART NUMBER
80063	LS-445/U
32001	P4-SB-2
87771	LS-445/U

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: LOUDSPEAKER

NOMENCLATURE: LS-455/U

FEDERAL STOCK NO: 5965-588-4870

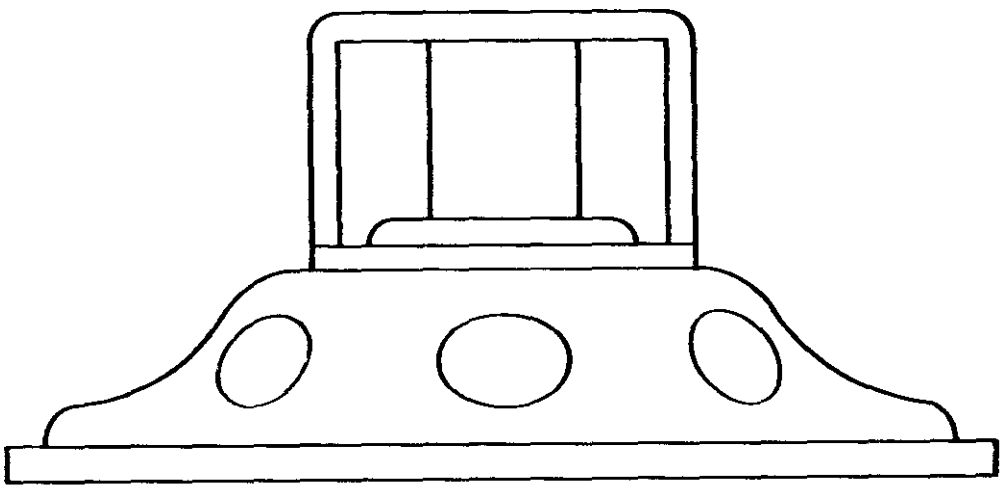

FUNCTIONAL DESCRIPTION:

Loudspeaker LS-455/U is an unencased, 2-watt, permanent magnet type loudspeaker unit. It has a 4-inch diameter cone with a voice coil impedance of 3.2 ohms. It is suitable for use in announcing - equipment, shipboard.

CONSISTS OF:

1 Permanent Magnet Loudspeaker LS-455/U

RELATIONSHIP TO SIMILAR EQUIPMENT:

This speaker, with appropriate transformer, is interchangeable with NT-49817.

PHYSICAL DESCRIPTION:

Diameter - 4 inches (101.60 mm)

Mounting Dimensions:

Four .187 dia. holes on 3.312 inch mounting centers and four .250 dia. holes on .687 x 4.562 inch mounting centers.

Over-all Dimensions:

Length - 4.062 inches (103.17 mm)
Width - 4.062 inches (103.17 mm)
Depth - 1.875 inches (maximum) (47.63 mm)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: LOUDSPEAKER

NOMENCLATURE: LS-455/U (Cont)

FEDERAL STOCK NO: 5965-588-4870

TECHNICAL DESCRIPTION:


INPUT

Voice coil impedance	3.2 ohms
Power handling rating	5 watts, peak
Frequency range	200 to 5,000 Hz.

ADDITIONAL TECHNICAL DATA:

Environmental Service:

Moisture	In accordance with Method 106 of MIL-STD-202
Shock	MIL-T-17113 (Type 1)
Vibration	MIL-STD-167 (Type 1)

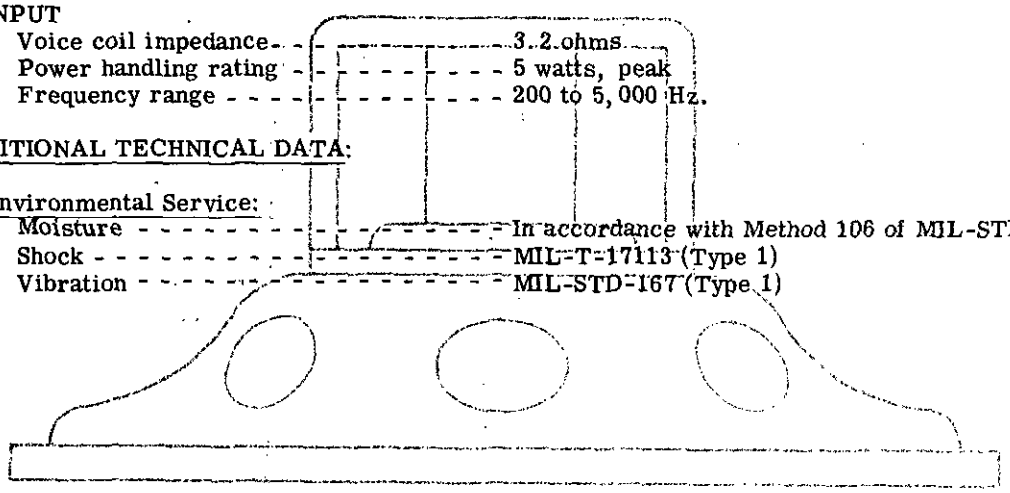

REFERENCE DATA and LITERATURE

Navy (BuShips) Dwg. RE 49C724
MSS 5965-6


MANUFACTURER CODE	PART NUMBER
80063	LS-455/U
87771	C4BN06001

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: LOUDSPEAKER

NOMENCLATURE: LS-180/U

FEDERAL STOCK NO: 5965-280-3808

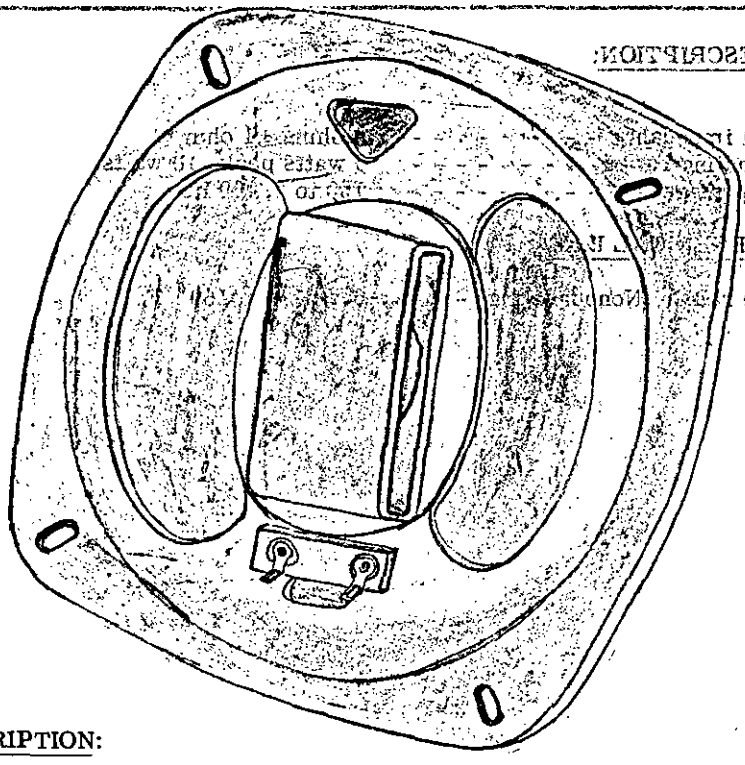

FUNCTIONAL DESCRIPTION:

This unit is a permanent magnet unencased loudspeaker. It is capable of withstanding extreme temperature changes. The unit is rugged and light, and is designed for general purpose use. This speaker is moisture, vibration, and shock resistant.

CONSISTS OF:

1	Loudspeaker, Permanent Magnet	LS-180/U

RELATIONSHIP TO SIMILAR EQUIPMENT:

PHYSICAL DESCRIPTION:

Diameter	8 inches (203.20 mm)
Mounting dimensions	Four 0.200 x 0.375 inch mounting slots spaced 90 degrees apart on 7.625 inch diameter.
Terminal/connector designation	Two solder lug type on terminal board

Overall dimensions:

Diameter	8.44 inches maximum (214.38 mm)
Depth	5 inches maximum (127.00 mm)

PART NUMBER	MANUFACTURER CODE
LS-180/U	80058
LS-180/U	81349
LS-180/U	04648

Source: https://assist.dla.mil -- Downloaded: 202640-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: LOUDSPEAKER

NOMENCLATURE: LS-180/U (Cont)

FEDERAL STOCK NO: 5965-280-3808

TECHNICAL DESCRIPTION:

INPUT

Voice coil impedance	8 ohms ±1 ohm
Power handling rating	5 watts peak -10 watts
Frequency range	150 to 7, 000 Hz

ADDITIONAL TECHNICAL DATA:

Temperature range (Nonoperating)	-65° F to + 160° F

REFERENCE DATA and LITERATURE

MIL-L-10911/3
SC-827-4698


MANUFACTURER CODE	PART NUMBER
80058	LS-180/U
81349	LS-180/U
04848	LS-180/U

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: LOUDSPEAKER

NOMENCLATURE: COMMERCIAL P5-V

FEDERAL STOCK NO: 5965-128-2974

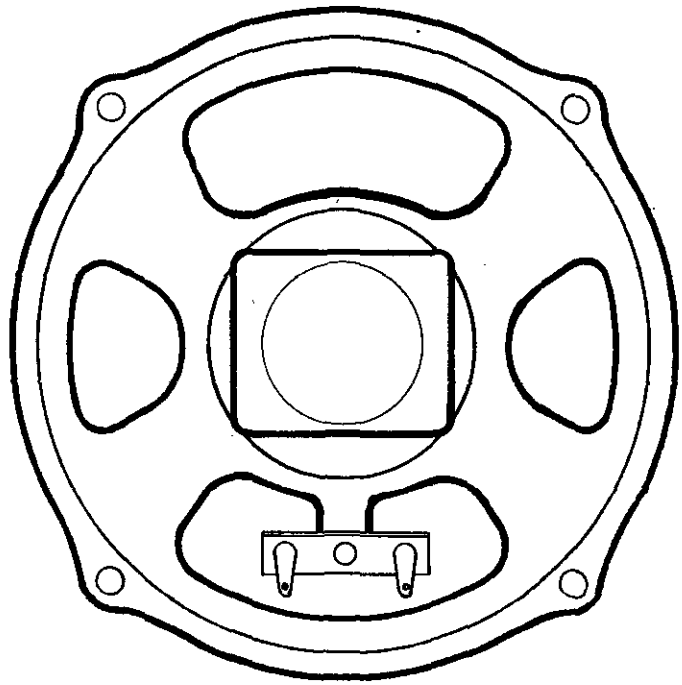

FUNCTIONAL DESCRIPTION:

This unit is a permanent magnet unencased loudspeaker. The nominal diameter is 5 inches. The unit is rugged and is designed for general purpose use. This speaker is moisture and fungus resistant.

CONSISTS OF:

1	Loudspeaker, Permanent Magnet	P5V

RELATIONSHIP TO SIMILAR EQUIPMENT:

The loudspeaker is interchangeable with P5VSTT07.

PHYSICAL DESCRIPTION:

Diameter	4.69 inches (119.13 mm)
Mounting Dimensions	Four 0.200 inch diameter mounting holes spaced 90 degrees apart on 4.69 inch diameter.
Terminal/Connector Designation	2 solder lug type on terminal board

Over-all Dimensions:

Diameter	5.06 inches maximum (128.52 mm)
Depth	2.25 inches maximum (57.15 mm)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: LOUDSPEAKER

NOMENCLATURE: P5-V (Cont)

FEDERAL STOCK NO: 5965-128-2974

TECHNICAL DESCRIPTION:

INPUT

Voice coil impedance - - - - - - - - -	3.2 ohms ±1 ohm.
Power handling rating- - - - - - - - -	5.5 watts rms; peak 11 watts.

ADDITIONAL TECHNICAL DATA:

Magnet Material - - - - - - - - - - - -	Alnico V.
Magnet Weight - - - - - - - - - - - - -	1.47 ounces.
Voice Coil Diameter - - - - - - - - - -	0.56 nominal.

REFERENCE DATA and LITERATURE

Jensen Mfg. Company Dwg. No. 5401193
MIL-P-3115 (terminal strip)
QQ-P-416 Type II, Class A (steel parts)


MANUFACTURER CODE	PART NUMBER
32001	P5-V

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: LOUDSPEAKER

NOMENCLATURE: COMMERCIAL P5T-C5696; 612833

FEDERAL STOCK NO: 5965-284-6708

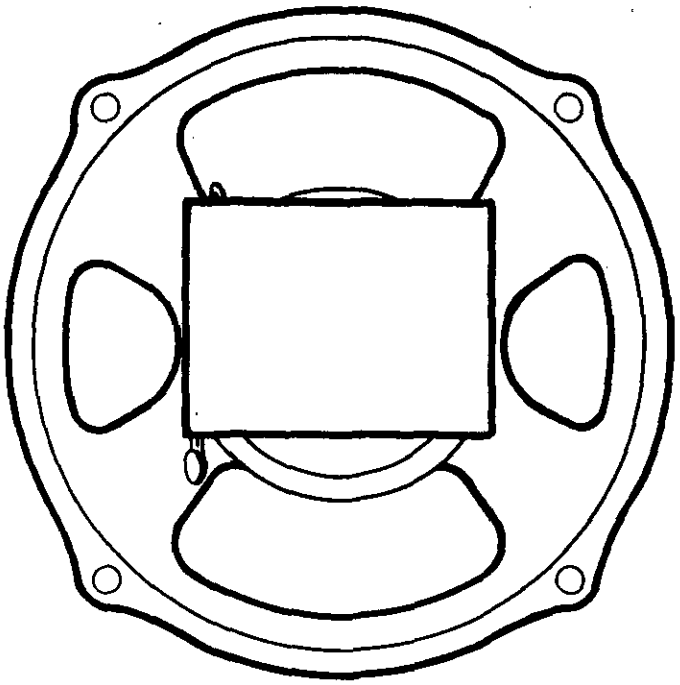

FUNCTIONAL DESCRIPTION:

This unit is a permanent magnet moving voice coil-type loudspeaker. It is designed to be used with 16 mm. sound motion picture projection sets suitable for use under the severe operating and handling conditions encountered in service in tropical temperature and arctic climates both ashore and afloat.

CONSISTS OF:

1 Permanent Magnet Loudspeaker P5T-C5696

RELATIONSHIP TO SIMILAR EQUIPMENT:

Used on Motion Picture Sound Projector AQ-2A(1)

PHYSICAL DESCRIPTION:

Diameter	5 inches (127.00 mm)
Mounting Dimensions	Four holes 5/32 inches in diameter spaced 90 degrees apart on 2-11/32 inch radius
Terminal/Connector Designation	Solder Lug Type

Over-all Dimensions:

Diameter	5 inches (127.00 mm)
Depth	2.625 inches (66.68 mm)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: LOUDSPEAKER

NOMENCLATURE: *COMMERCIAL P5T-C5696; 612833 (Cont)*

FEDERAL STOCK NO: 5965-284-6708

ADDITIONAL PHYSICAL DATA:

Magnet Material	Alnico No. 5 or equal
Cone Treatment	Fungus Resistant
Air Gap Clearance	0.009 inch either side of the voice coil

TECHNICAL DESCRIPTION:

INPUT

Voice coil impedance	8 ohms ± 10 percent
Power handling rating	10 watts (warble tones)
Frequency range	80 to 8,000 Hz.

ADDITIONAL TECHNICAL DATA:

REFERENCE DATA and LITERATURE

MIL-P-49
Bell and Howell Drawing No. 612833
MSS 5965-6


MANUFACTURER CODE	PART NUMBER
32001	P5T-C5696
06650	612833

Source: https://assist.dla.mil -- Downloaded: 202640-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: LOUDSPEAKER

NOMENCLATURE: LS-590( )/U

FEDERAL STOCK NO: 5965-011-3639

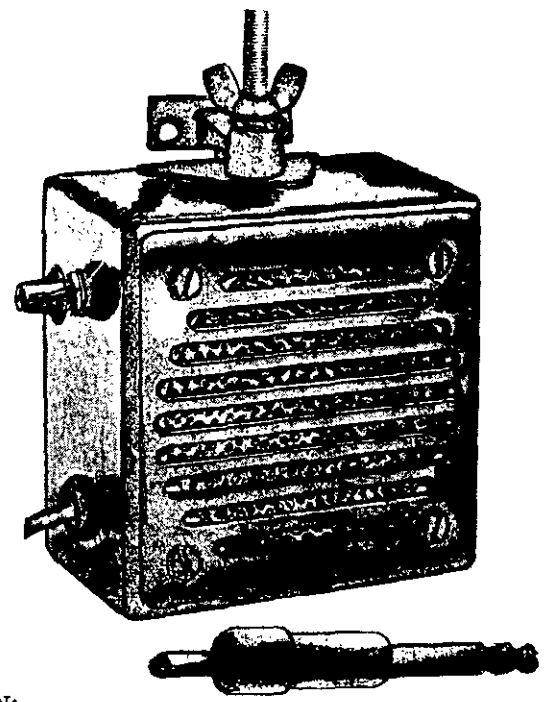

FUNCTIONAL DESCRIPTION:

This unit is a 4-inch, direct radiator, dynamic type loudspeaker. It is housed in a metal inclosure and is resistant to weather, gun-blast, immersion, humidity, temperature extremes, and bounce. The unit is intended for use with ground service tactical equipments where resistance to gunfire and immersion are requirements. The loudspeaker is equipped with a switch. The switch is a two-position switch. One position connects to a 4, 000 ohm impedance, and the other position connects to a 250 ohm position.

CONSISTS OF:

1 - Loudspeaker Unit - Type LS445/U
1 - Cabinet - Metal with Adjustable Clamp
1 - Cord - Type COS-2(18)
1 - Plug - Type - 055B

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: LOUDSPEAKER

NOMENCLATURE: LS-590( )/U (Con't)

FEDERAL STOCK NO: 5965-011-3639

RELATIONSHIP TO SIMILAR EQUIPMENT:

Type LS-590( )/U is a replacement for loudspeaker LS-11-A and LS-203/U. The LS-590( )/U is similar to the LS-166/U and the LS-454/U.

PHYSICAL DESCRIPTION:

Diameter	4 inches (101.60 mm)
Mounting dimensions	Adjustable mounting bracket with two 9/32-inch (7.14 mm) diameter holes spaced 1-1/2 inch center to center.
Plug	PJ-055B

Overall dimensions:

Length	7.031 inches (178.59 mm)
Width	4.906 inches (124.61 mm)
Depth	3.312 inches (84.12 mm)

TECHNICAL DESCRIPTION:

INPUT

Voice coil impedance	8 ohms
Power handling rating	2 watts (warble tones)
Frequency range	300 to 7,000 Hz

ADDITIONAL TECHNICAL DATA:

Transformer data	Multi-stage - 4,000 ohms primary impedance and 250 ohms primary impedance
Resistant characteristics	Resistant to gun-blast, immersion, humidity, temperature extremes, and bounce

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:37Z
Check the source to verify that this is the currentversion before use.

ITEM NAME: LOUDSPEAKER

NOMENCLATURE: LS-590( )/U (Con't)

FEDERAL STOCK NO: 5965-011-3639

Environmental data:

Operating conditions:

Temperature	From -65°F to +160°F
Elevation	5, 000 feet above sea level
Relative humidity	95 percent
Salt-laden air	As encountered in coastal regions

Nonoperating conditions:

Temperature	From -80°F to +160°F for 72 hours
Elevation	50, 000 feet above sea level
Relative humidity	100 percent

REFERENCE DATA and LITERATURE

MIL-L-12606
MIL-L-12632


MANUFACTURER CODE	PART NUMBER
80058	LS-590( )/U
80063	LS-590( )/U
87771	LS-590( )/U
04848	LS-590( )/U

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: LOUDSPEAKER

NOMENCLATURE: LS-446/U

FEDERAL STOCK NO: 5965-879-1159

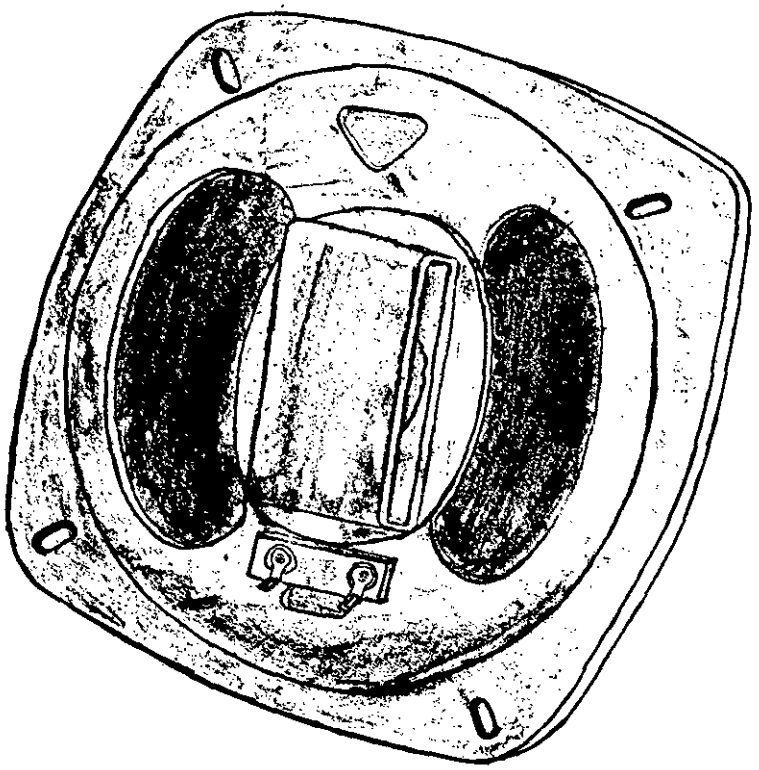

FUNCTIONAL DESCRIPTION:

This unit is a permanent magnet unencased loudspeaker. It is capable of withstanding extreme temperature changes. The unit is rugged and light, and is designed for general purpose use. This speaker is moisture, vibration, and shock resistant.

CONSISTS OF:

1	Loudspeaker, Permanent Magnet	LS-446/U

RELATIONSHIP TO SIMILAR EQUIPMENT:

PHYSICAL DESCRIPTION:

Diameter	6 inches (152.4 mm)
Mounting dimensions	Four 0.200 x 0.375 inch mounting slots spaced 90 degrees apart on 6.125 inch (155.58 mm) diameter.
Terminal/connector designation	Two solder lug type on terminal board

Overall dimensions:

Diameter	6.94 inches maximum (176.28 mm)
Depth	3.38 inches maximum (85.85 mm)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: LOUDSPEAKER

NOMENCLATURE: LS-446/U (Con't)

FEDERAL STOCK NO: 5965-879-1159

TECHNICAL DESCRIPTION:

INPUT

Voice coil impedance	3 to 4.5 ohms (3.2 ohms nominal)
Power handling rating	5 watts rms; peak - 8 watts rms.
Frequency range	150 to 7,000 Hz

ADDITIONAL TECHNICAL DATA:

Temperature range (nonoperating)	-65°F to +160°F

REFERENCE DATA and LITERATURE

MIL-L-10911/2


MANUFACTURER CODE	PART NUMBER
80058	LS-446/U
81349	LS-446/U
04848	LS-446/U

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: LOUDSPEAKER

NOMENCLATURE: LS-447/U

FEDERAL STOCK NO: *(NOT AVAILABLE)*

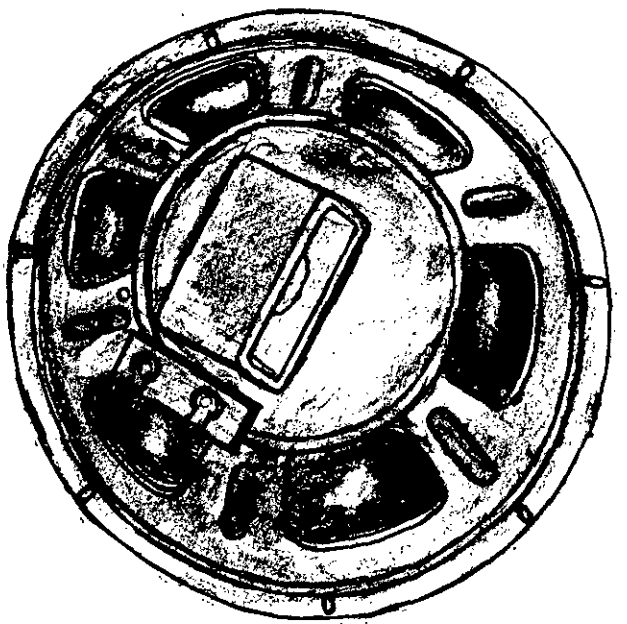

FUNCTIONAL DESCRIPTION:

This unit is a permanent magnet unencased loudspeaker. It is capable of withstanding extreme temperature changes. The unit is rugged and light, and is designed for general purpose use. This speaker is moisture, vibration, and shock resistant.

CONSISTS OF:

1	Loudspeaker, Permanent Magnet	LS-447/U

RELATIONSHIP TO SIMILAR EQUIPMENT:

PHYSICAL DESCRIPTION:

Diameter	10 inches (254.0 mm)
Mounting dimensions	Eight 0.218 x 0.375 inch mounting slots spaced 45 degrees apart on 9.625 inches (244.48) diameter.
Terminal/connector designation	Two solder lug type on terminal board
Overall dimensions:	
Diameter	10.25 inches maximum (260.35 mm)
Depth	6 inches maximum (152.4 mm)

Source: https://assist.dla.mil -- Downloaded: 202640-26T13:37Z
Check the source to verify that this is the currentversion before use.

ITEM NAME: LOUDSPEAKER
NOMENCLATURE: LS-447/U (Cont)
FEDERAL STOCK NO: (NOT AVAILABLE)

TECHNICAL DESCRIPTION:

INPUT

Voice coil impedance	3 to 4.5 ohms (3.20 ohms nominal)
Power handling rating	10 watts rms; peak - 20 watts
Frequency range	150 to 7,000 Hz

ADDITIONAL TECHNICAL DATA:

Temperature range (nonoperating)	-65°F to +160°F

REFERENCE DATA and LITERATURE

MIL-L-10911/4


MANUFACTURER CODE	PART NUMBER
80058	LS-447/U
81349	LS-447/U
04848	LS-447/U

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: LOUDSPEAKER

NOMENCLATURE: COMMERCIAL PM-69E

FEDERAL STOCK NO: 5965-296-6052

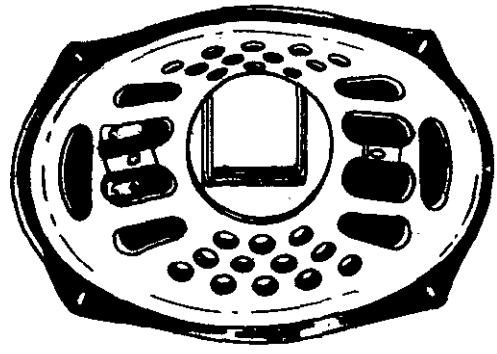

FUNCTIONAL DESCRIPTION:

This loudspeaker is a permanent magnet, oval type speaker suitable for use with automotive radios, public address systems, and for general purpose use.

CONSISTS OF:

1 Loudspeaker Cleveland Electronics Type PM-69E

RELATIONSHIP TO SIMILAR EQUIPMENT:

PHYSICAL DESCRIPTION:

Nominal Diameter _ _ _ _ _ _ _ _ _ _ 6 X 9 inches, oval

Over-all Dimensions:

Length _ _ _ _ _ _ _ _ _ _ _ _ _ _ _ 9.125 inches (231.78 mm)
Width _ _ _ _ _ _ _ _ _ _ _ _ _ _ _ 6.375 inches (161.93 mm)
Depth _ _ _ _ _ _ _ _ _ _ _ _ _ _ _ 3.375 inches (85.73 mm)

Mounting Dimensions:

Four mounting slots spaced 4-5/8 inches by 6-9/16 inches center to center.

Weight _ _ _ _ _ _ _ _ _ _ _ _ _ _ _ _ 3/4 pounds
Terminal/Connector Type _ _ _ _ _ _ 2 - Clip Type (Fahnestock)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: LOUDSPEAKER

NOMENCLATURE: COMMERCIAL PM-69E (Cont)

FEDERAL STOCK NO: 5965-296-6052

ADDITIONAL PHYSICAL DATA:

Magnet Material	Alnico V
Magnet Weight	2.15 ounces

TECHNICAL DESCRIPTION:

INPUT

Voice coil impedance	3.2 ohms ± 10 percent
Power handling rating	4 watts, normal; 10 watts, peak (warble tones)
Frequency range	60 to 8,000 Hz

ADDITIONAL TECHNICAL DATA:

Cone Resonant Frequency	70 to 95 Hz

REFERENCE DATA and LITERATURE

Cleveland Electronics Company Drawing PM69E
Cleveland Electronics Company Catalog Form 562A
MSS 5965-6


MANUFACTURER CODE	PART NUMBER
86194	PM-69E

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: LOUDSPEAKER

NOMENCLATURE: LS-170 ( )/PFP-1

FEDERAL STOCK NO: 5965-518-4343

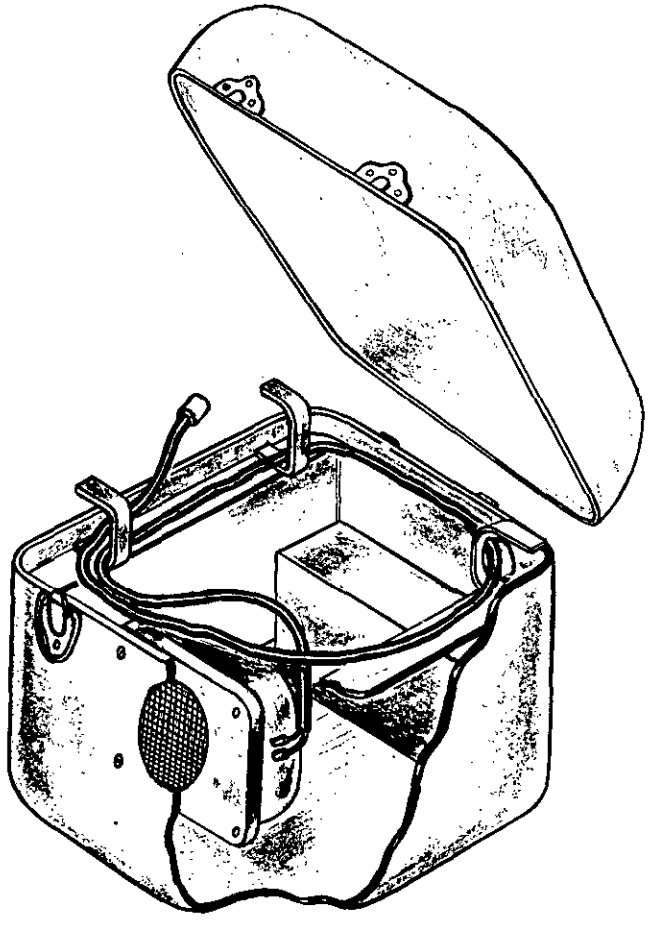

FUNCTIONAL DESCRIPTION:

This unit is a permanent magnet moving coil type loudspeaker. The loudspeaker is housed in a carrying case and is designed to be used with 16 mm sound motion picture projection sets suitable for use under severe operating and handling conditions encountered in service in tropical temperature and arctic climates both ashore and afloat.

CONSISTS OF:

1 Permanent Magnet Loudspeaker 620066

RELATIONSHIP TO SIMILAR EQUIPMENT:

This loudspeaker is the same as FSN 5965-518-4344 except it is without transformer. Used on Motion Picture Sound Projection Equipment IC/QEB-1D, AS-2(1), AS-7A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: LOUDSPEAKER
NOMENCLATURE: LS-170 ( )/PFP-1 (Cont)
FEDERAL STOCK NO: 5965-518-4343

PHYSICAL DESCRIPTION:

Nominal Diameter	8 inches (203.20 mm)
Mounting Dimensions	4 mounting holes spaced 90 degrees apart on a 3-13/16 inch (96.84 mm) radius
Terminal/Connector Designation	Solder Lug Type

Over-all Dimensions:

Diameter	8.125 inches (206.38 mm)
Depth	4.31 inches (109.47 mm)

ADDITIONAL PHYSICAL DATA:

Case Dimensions:

Length	14 inches (355.60 mm)
Width	9 inches (228.60 mm)
Height	14 inches (355.60 mm)

Cable Data:

Length	75 feet (22.86 m)
Connector	Cannon type XLR-3-12C

Magnet Material	Alnico No. 5 or equal

TECHNICAL DESCRIPTION:

INPUT

Voice coil impedance	16 ohms ± 10 percent at 1,000 Hz.
Power handling rating	25 watts, normal, 40 watts, peak (warble tones)
Frequency range	100 to 10,000 Hz.

ADDITIONAL TECHNICAL DATA:

REFERENCE DATA and LITERATURE

DWG SC-DL-339163
MSS 5965-6

MANUFACTURER CODE	PART NUMBER
32001	P8Q-C6881
06650	620066
80063	LS-170 ( )/PFP-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: LOUDSPEAKER

NOMENCLATURE: COMMERCIAL 12984

FEDERAL STOCK NO: 5965-518-4344

No illustration available

FUNCTIONAL DESCRIPTION:

This unit is a permanent magnet moving coil type loudspeaker. The loudspeaker is housed in a carrying case and is designed to be used with 16 m. m. sound motion picture projection sets suitable for use under severe operating and handling conditions encountered in service in tropical temperature and arctic climates both ashore and afloat.

CONSISTS OF:

1 Permanent Magnet Loudspeaker 12984

RELATIONSHIP TO SIMILAR EQUIPMENT:

Part of, Navy Type IC/QEB-1D, Projector Set, Motion Picture Sound. This loudspeaker is the same as LS-170 ( )/PFP-1 except it has a transformer.

PHYSICAL DESCRIPTION:

Diameter	8 inches (203.20 mm)
Mounting Dimensions	8 mounting holes spaced 45 degrees apart on a 3-13/16 inch (96.84 mm) radius
Terminal/Connector Designation	Solder Lug Type

Over-all Dimensions:

Diameter	8.125 inches (206.38 mm)
Depth	4.375 inches (111.13 mm)

ADDITIONAL PHYSICAL DATA:

Case Dimensions:

Length	14 inches (355.60 mm)
Width	9 inches (228.60 mm)
Height	14 inches (355.60 mm)

Cable Data:

Length	75 feet (22.86 m)
Connector	Cannon type XL-13-12SC
Magnet Material	Alnico No. 5 or equal

TECHNICAL DESCRIPTION:

INPUT

Voice coil impedance	16 ohms ± 10 percent at 1,000 Hz
Power handling rating	25 watts, normal; 40 watts, peak (5 minutes)
Frequency range	100 to 10,000 Hz

ADDITIONAL TECHNICAL DATA:

Transformer Data:

Primary Impedance	1000 ohms
Secondary Taps	Will permit the output power to be reduced from 20 watts to 0.31 watts in steps of 3 dB with a 70 volt input signal

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: LOUDSPEAKER

NOMENCLATURE: COMMERCIAL 12984 (Cont)

FEDERAL STOCK NO: 5965-518-4344

REFERENCE DATA and LITERATURE

MSS 5965-6
Final Report- "Standardization of Loudspeakers" Prepared by Stromberg-Carlson
MIL-P-49


MANUFACTURER CODE	PART NUMBER
17462	12984

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: LOUDSPEAKER

NOMENCLATURE: COMMERCIAL SK 8163

FEDERAL STOCK NO: 5965-519-6610

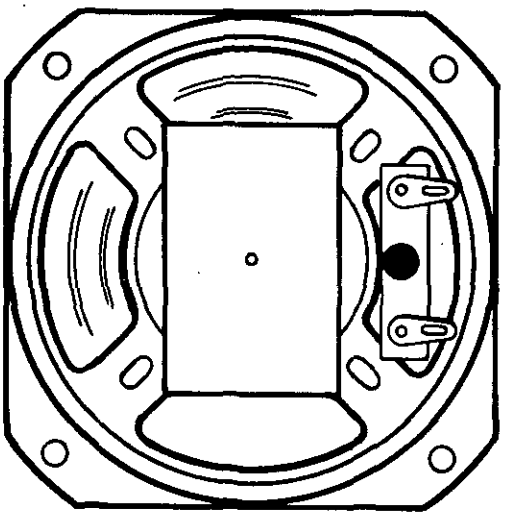

FUNCTIONAL DESCRIPTION:

This unit is a permanent magnet dynamic type loudspeaker capable of reproducing sounds in the frequency range of 400 to 4000 Hz. The unit is rugged and capable of operation under severe environmental conditions.

CONSISTS OF:

1 Permanent Magnet Loudspeaker SK 8163

RELATIONSHIP TO SIMILAR EQUIPMENT:

PHYSICAL DESCRIPTION:

Diameter	3-1/2 inches (88.90 mm)
Mounting Dimensions	Four mounting holes 3/16 inch in diameter spaced on 2-25/32 inch mounting centers.
Terminal/Connector Designation	Solder Lug Type

Over-all Dimensions:

Length	3.438 inches (87.33 mm)
Width	3.438 inches (87.33 mm)
Depth	2 inches (50.80 mm)

Source: https://assist.dla.mil -- Downloaded: 202640-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: LOUDSPEAKER

NOMENCLATURE: COMMERCIAL SK 8163 (Cont)

FEDERAL STOCK NO: 5965-519-6610

ADDITIONAL PHYSICAL DATA:

Magnet Material ..... Alnico No. 5 (2.15 ounce)

TECHNICAL DESCRIPTION:

INPUT

Voice coil impedance	3.2 ohms ± 10 percent
Power handling rating	5 watts (warble tones)
Frequency range	400 to 4,000 Hz.

ADDITIONAL TECHNICAL DATA:

Environmental Data:

Operating Conditions:

Altitude	10,000 feet above sea level
Temperature	From -54 to + 85 degrees C
Humidity	100 percent

Nonoperating Conditions:

Altitude	40,000 feet above sea level
Temperature	From -29 to + 71 degrees C
Humidity	100 percent

REFERENCE DATA and LITERATURE

Olympic Radio Drawing No. SK 8163
MSS 5965-6


MANUFACTURER CODE	PART NUMBER
85995	SK 8163

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: LOUDSPEAKER

NOMENCLATURE: COMMERCIAL 3A070T

FEDERAL STOCK NO: 5965-543-0264



FUNCTIONAL DESCRIPTION:

This unit is a 3-1/2 inch permanent magnet speaker utilizing a 0.65 ounce Alnico V magnet. A mylar plastic film on the cone provides a resistance to moisture, dirt, and sand abrasion. Air gap surfaces are cadmium plated and enameled. The unit is therefore suitable for use in outdoor service.

CONSISTS OF:

1	Loudspeaker	Quam Nichols Model No. 3A070T

RELATIONSHIP TO SIMILAR EQUIPMENT:

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: LOUDSPEAKER

NOMENCLATURE: COMMERCIAL 3A070T (Cont)

FEDERAL STOCK NO: 5965-543-0264

PHYSICAL DESCRIPTION:

Nominal Diameter . . . . . 3-1/2 inches (88.90 mm)

Overall Dimensions:

Length . . . . . 3.469 inches (88.11 mm)
Width . . . . . 3.469 inches (88.11 mm)
Depth . . . . . 1.516 inches (38.51 mm)

Mounting Dimensions:

Four 0.200 inch diameter holes located 90 degrees apart and 2-25/32 inches (70.64 mm) center to center.

Magnet Weight . . . . . 0.65 ounces

TECHNICAL DESCRIPTION:

INPUT
Voice coil impedance . . . . 3.2 ohms
Power handling rating . . . 2.5 watts, peak (warble tones)
Frequency range . . . . . 150 to 5,000 Hz

ADDITIONAL TECHNICAL DESCRIPTION:

REFERENCE DATA and LITERATURE

Quam Nichols Catalog 63
Military Supply Standard MSS 5965-6


MANUFACTURER CODE	PART NUMBER
74199	3A070T

Source: https://assist.dla.mil -- Downloaded: 202640-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: LOUDSPEAKER

NOMENCLATURE: COMMERCIAL SP8B

FEDERAL STOCK NO: 5965-581-9978



FUNCTIONAL DESCRIPTION:

This unit is a full range permanent magnet loudspeaker in which the mass of the bass cone and its voice coil coupling compliance are so proportioned as to decouple the bass cone mechanically, above the crossover frequency. It is free from phasing dips, and can be used for general purpose full range reproduction.

CONSISTS OF:

1 Loudspeaker, Electro-Voice, Model SP8B

RELATIONSHIP TO SIMILAR EQUIPMENT:

Source: https://assist.dla.mil -- Downloaded: 202640-26T13:37Z
Check the source to verify that this is the currentversion before use.

ITEM NAME: LOUDSPEAKER

NOMENCLATURE: COMMERCIAL SP8B (Cont)

FEDERAL STOCK NO: 5965-581-9978

PHYSICAL DESCRIPTION:

Diameter . . . . . 8-3/8 Inches (212.73 mm)

Mounting Dimensions:

Four holes 9/32 inch diameter equally spaced on 7-5/8 inch (193.68 mm) mounting circle.

Terminal/Connector Designation . . . Two binding posts

Over-all Dimensions:

Diameter . . . . . 8.375 inches (212.73 mm)
Depth . . . . . 4.75 inches (120.65 mm)
Baffle Aperture . . . . . 7.125 inches diameter (180.98 mm)

Weight . . . . . 6 pounds 15 ounces

ADDITIONAL PHYSICAL DATA:

Materials:

Frame . . . . . Die Cast Zinc
Magnet . . . . . Ceramic

TECHNICAL DESCRIPTION:

INPUT
Voice coil impedance . . . . 16 ohms
Power handling rating . . . . 20 watts, normal; 40 watts, peak
Frequency range . . . . . 50 to 13,000 Hz

ADDITIONAL TECHNICAL DATA:

SPECIAL FEATURES:

Incorporates mechanical tweeter

REFERENCE DATA and LITERATURE

MSS 5965-6
Electro-Voice Specification Sheet . . . . Part No. 53232
Electro-Voice Customer Spec Sheet . . . Part No. 808-1635C

MANUFACTURER CODE	PART NUMBER
81134	SP8B

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: LOUDSPEAKER

NOMENCLATURE: LS-450/B

FEDERAL STOCK NO: 5965-583-4106

No illustration available

FUNCTIONAL DESCRIPTION:

The LS-450/B is a permanent magnet dynamic loudspeaker for speech communication between the interior of a submarine and the bridge or escape hatch. It may also be used as a microphone in two-way conversation. The unit will operate under pressure conditions from atmospheric pressure to high pressure present at submarine operating depths. The unit is protected against normal sea exposure and freezing spray conditions by encapsulating the moving voice coil assembly in silicone rubber.

CONSISTS OF:

1 Loudspeaker, Permanent Magnet, LS-450/B

RELATIONSHIP TO SIMILAR EQUIPMENT:

Electrically and dimensionally interchangeable with the IC/SHA-IR Loudspeaker (Per BuShips Dwg. 900-S 6502-73987 Rev. O). The output sound pressure level of the LS-450/B is about 8 dB lower than the IC-SHA-IR output level with the same input power.

PHYSICAL DESCRIPTION:

Diameter	6 inches (152.40 mm)
Mounting Dimensions	Four mounting holes 9/16 inch (14.29 mm) in diameter on 2-3/8 inch by 3-7/8 inch (60.33 by 98.43 mm) mounting centers
Terminal/Connector Designation	Two No. 8-32 binder head machine screws on terminal board.

Over-all Dimensions:

Diameter	6 inches (152.40 mm)
Depth	5 inches (127.00 mm)
Weight	14 pounds

ADDITIONAL PHYSICAL DATA:

TECHNICAL DESCRIPTION:

INPUT

Voice coil impedance	16 ohms
Power handling rating	5 watts (25 watts, max) (warble tones)
Frequency range	600 to 5,000 Hz

ADDITIONAL TECHNICAL DATA:

Output as a Microphone	.01 volts with 16 ohms load at 100 dB sound pressure level 775-1225 Hz.

Environmental Data:

Pressure Proof
Freeze Proof
Submersible

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: LOUDSPEAKER

NOMENCLATURE: LS-450/B (Cont)

FEDERAL STOCK NO: 5965-583-4106

REFERENCE DATA and LITERATURE

MIL-L-24296 (Ships)
MIL Drawing 815-185-3087


MANUFACTURER CODE	PART NUMBER
80058	LS-450/B
32001	LS-450/B

Source: https://assist.dla.mil -- Downloaded: 202640-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: LOUDSPEAKER

NOMENCLATURE: LS-448/U

FEDERAL STOCK NO: (NOT AVAILABLE)

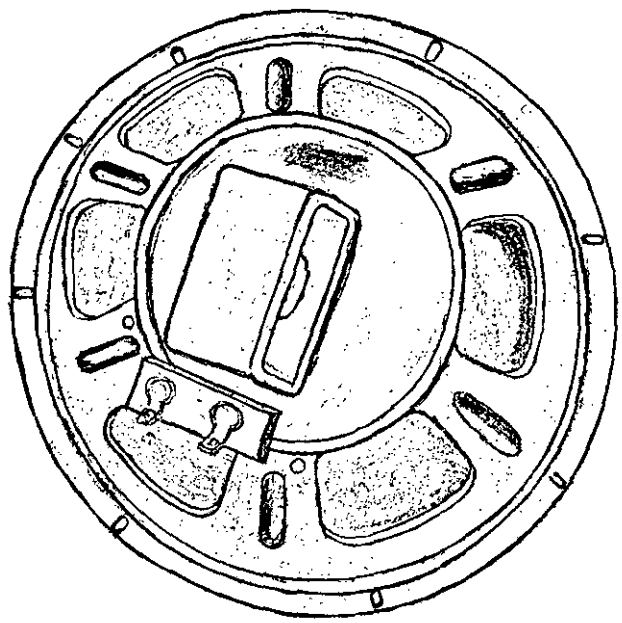

FUNCTIONAL DESCRIPTION:

This unit is a permanent magnet unencased loudspeaker. It is capable of withstanding extreme temperature changes. The unit is rugged and light, and is designed for general purpose use. The speaker is moisture, vibration, and shock resistant.

CONSISTS OF:

1	Loudspeaker, Permanent Magnet	LS-448/U

RELATIONSHIP TO SIMILAR EQUIPMENT:

PHYSICAL DESCRIPTION:

Diameter	12 inches (304.8 mm)
Mounting dimensions	Eight 0.250 x 0.375 inch mounting slots spaced 45 degrees apart on 11.562-inch (293.67 mm) diameter
Terminal/connector designation	Two solder lug type on terminal board

Overall dimensions:

Diameter	12.25 inches maximum (311.15 mm)
Depth	6.50 inches maximum (165.10 mm)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: LOUDSPEAKER

NOMENCLATURE: LS-448/U (Cont)

FEDERAL STOCK NO: (NOT AVAILABLE)

TECHNICAL DESCRIPTION:

INPUT

Voice coil impedance - - - - - - - -	7 to 9 ohms
Power handling rating - - - - - - -	14 watts rms; peak - 20 watts rms
Frequency range - - - - - - - - - -	150 to 7, 000 Hz

ADDITIONAL TECHNICAL DATA:

Temperature range (nonoperating) - - -	-65°F to +160°F

REFERENCE DATA and LITERATURE

MIL-L-10911/5

MANUFACTURER CODE	PART NUMBER
80058	LS-448/U
81349	LS-448/U
04848	LS-448/U

Source: https://assist.dla.mil -- Downloaded: 202640-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: LOUDSPEAKER

NOMENCLATURE: LS-444/WIH

FEDERAL STOCK NO: 5965-615-0758

No illustration available

FUNCTIONAL DESCRIPTION:

The LS-444/WIH is a direct radiator, permanent magnet type loudspeaker. The unit is furnished with a matching transformer and controls within an enclosure. The loudspeaker is intended for use with Naval motion picture and entertainment installations.

CONSISTS OF:

1 Permanent Magnet Loudspeaker LS-444/WIH

Including:

1 Channel Selector
1 Volume Control
1 Transformer

RELATIONSHIP TO SIMILAR EQUIPMENT:

Similar to LS-443/WIH

PHYSICAL DESCRIPTION:

Diameter	8 inches (203.20 mm)
Mounting Dimensions	Three 1/2 inch (12.70 mm) diameter mounting holes on isoscelese triangle with 8-3/4 inch (222.25 mm) base and 8 inch (203.2 mm) altitude.

Over-all Dimensions:

Length	15 inches (381.00 mm)
Width	9 inches (228.60 mm)
Height	15 inches (381.00 mm)

ADDITIONAL PHYSICAL DATA:

Material of Enclosure	Metal or fibrous glass reinforced polyester plastic

TECHNICAL DESCRIPTION:

INPUT

Voice coil impedance	8 ohms
Power handling rating	5 watts (warble tones)
Frequency range	120 to 7,000 Hz

ADDITIONAL TECHNICAL DATA:

Transformer Winding Data	Primary winding tapped at; 5 volt-amperes, 2.5 VA, 1.25 VA, .63 VA, .31 VA, .15 VA with a 8 ohm resistive load and a 70.7 volt line. Secondary winding tapped at; 5 VA, 1.25 VA, and .31 VA with an 8 ohm resistive load and 70.7 V applied to the 5 VA Primary winding.
Channel Selector	5 positions. It will be so connected that it will switch its two output leads to any one of 4 separate inputs. The unconnected position shall be at the CCW end and marked "OFF"

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: LOUDSPEAKER

NOMENCLATURE: LS-444/WIH (Cont)

FEDERAL STOCK NO: 5965-615-0758

Volume Control	6 Positions. It will connect one lead from the channel selector to the various taps of the line-to-voice coil transformer.

REFERENCE DATA and LITERATURE

MIL-L-17080
MSS 5965-6


MANUFACTURER CODE	PART NUMBER
80064	LS-444/WIH
81349	LS-444/WIH

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: LOUDSPEAKER

NOMENCLATURE: LS-215 ( )/U

FEDERAL STOCK NO: 5965-636-1761

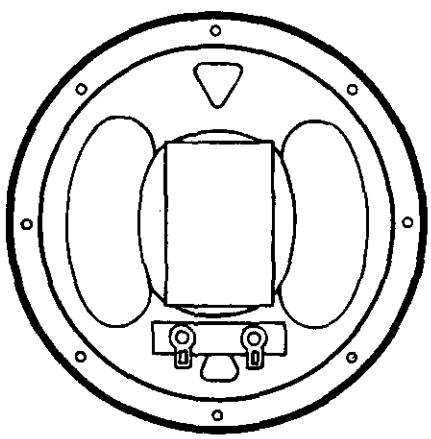

FUNCTIONAL DESCRIPTION:

The LS-215 ( )/U is a permanent magnet, direct radiator, dynamic type loudspeaker. It employs an input transformer and is housed in a metal inclosure. It is intended for general purpose use in radio, wire, and public address equipment which is generally sheltered.

CONSISTS OF:

1 Loudspeaker, Permanent Magnet, LS-215 ( )/U

RELATIONSHIP TO SIMILAR EQUIPMENT:

PHYSICAL DESCRIPTION:

Diameter	6 inches (152.40 mm)
Mounting Dimensions (of housing)	Four No. 1/4-20 screws on 6-1/4 inch by 6-1/4 inch (158.75 mm) mounting centers.
Mounting Dimensions (of speaker)	Eight mounting holes 0.200 inch (5.08 mm) in diameter spaced 45 degrees apart on 3.062 inch (77.77 mm) radius.
Terminal/Connector Designation	Three screw type on a connecting block.

Over-all Dimensions:

Length	8 inches (203.20 mm)
Width	8 inches (203.20 mm)
Depth	4 inches (101.6 mm)
Weight (Speaker Only)	2 pounds maximum

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: LOUDSPEAKER

NOMENCLATURE: LS-215 ( )/U (Cont)

FEDERAL STOCK NO: 5965-636-1761

ADDITIONAL PHYSICAL DATA:

Case Material	Metal
Terminal Markings	1 - 3, 8000 ohms; 1 - 2, 600 ohms; 2 - 3, 4000 ohms

TECHNICAL DESCRIPTION:

INPUT

Voice coil impedance	4 ohms
Power handling rating	2 watts, nominal
Frequency range	150 to 7,000 Hz

ADDITIONAL TECHNICAL DATA:

Environmental Data:

Nonoperating Conditions:

Temperature	From -80°F (24 hr. max.) to +160°F (4 hr. max.)
Relative Humidity	97% indefinite, 100% for 4 hours.
Elevation	25,000 feet above sea level.

Operating Conditions:

Temperature	From -65°F (72 hr. max.) to +150°F (4 hr. max.)
Relative Humidity	97% and 100% for 4 hours.
Elevation	10,000 feet above sea level
Resistant Characteristics	Resistant to: dust, salt, air, vibration, bounce, and shock

REFERENCE DATA and LITERATURE

MIL-L-10911
MIL-L-13073
MSS 5965
Final Report-"Standardization of Loudspeakers" Prepared by Stromberg-Carlson


MANUFACTURER CODE	PART NUMBER
80058	LS-215 ( )/U
81349	LS-215 ( )/U

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:37Z
Check the source to verify that this is the currentversion before use.

ITEM NAME: LOUDSPEAKER

NOMENCLATURE: LS-169/G

FEDERAL STOCK NO: 5965-296-2547

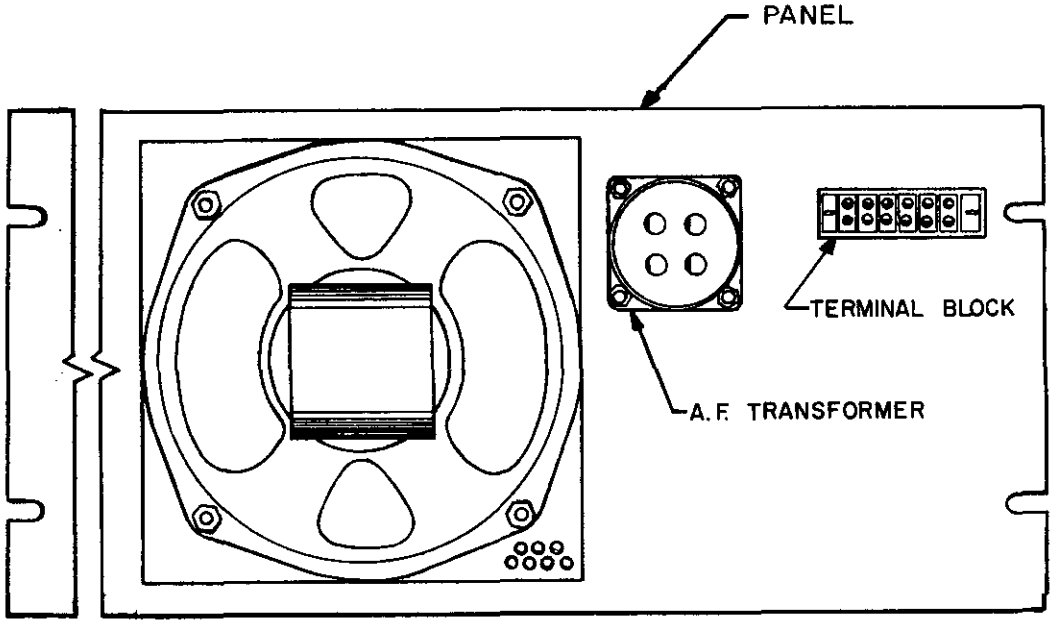

FUNCTIONAL DESCRIPTION:

The LS-169G is a six-inch permanent magnet loudspeaker suitable for general use.

CONSISTS OF:

1	Loudspeaker, Permanent Magnet	NT491814
1	Panel and Grill	
1	Attenuator	
1	Terminal Block Type 8TB6	

RELATIONSHIP TO SIMILAR EQUIPMENT:

PHYSICAL DESCRIPTION:

Speaker Dimensions:

Nominal Diameter	6 inches (152.4 mm)
Depth	4-3/8 inches (111.13 mm)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: LOUDSPEAKER
NOMENCLATURE: LS-169/G (Cont)
FEDERAL STOCK NO: 5965-296-2547

Panel Dimensions:
Length - - - - - - - - - - - - - - - - - 19 inches (482.6 mm)
Height - - - - - - - - - - - - - - - - - 6-1/2 inches (165.1 mm)

Mounting Dimensions:

Four mounting slots 7/16 x 1/4 inches are located at the corners of a 18-1/4 x 4 inches rectangle.

Weight - - - - - - - - - - - - - - - - - 6 pounds

ADDITIONAL PHYSICAL DATA:

Panel Material - - - - - - - - - - - - Aluminum

TECHNICAL DESCRIPTION:

INPUT
Voice coil impedance - - - - - - - - - - 4 ohms
Power handling rating - - - - - - - - - - 2 watts, normal; 5 watts, peak
Frequency range - - - - - - - - - - - - 200 to 5,000 Hz

ADDITIONAL TECHNICAL DATA:

Harmonic distortion - - - - - - - - - - - - 7 percent maximum

Transformer Impedance at Primary - - - 600 ohms

REFERENCE DATA and LITERATURE

BuShips Drawing RE 49F 773
BuShips Drawing RE 49C 764


MANUFACTURER CODE	PART NUMBER
80058	LS-169/G

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: LOUDSPEAKER

NOMENCLATURE: LS-305( )/SIC; LS-306( )/SIC

FEDERAL STOCK NO: 5965-636-2462; 5965-284-6579

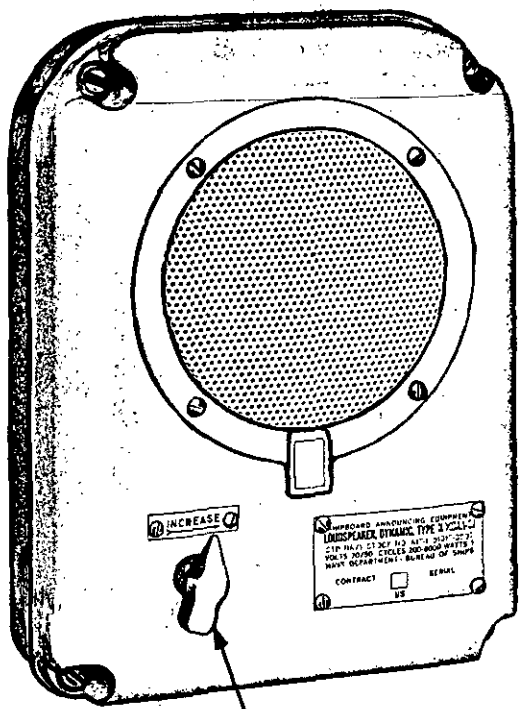

FUNCTIONAL DESCRIPTION:

The LS-305( )/SIC and LS-306( )/SIC are low power loudspeakers intended for reproduction of speech and alarm signals in sheltered areas of ships, such as living spaces, in which the noise level is comparatively low.

CONSISTS OF:

1 Loudspeaker, Dynamic LS-305( )/SIC or LS-306( )/SIC

RELATIONSHIP TO SIMILAR EQUIPMENT:

Source: https://assist.dla.mil -- Downloaded: 202640-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: LOUDSPEAKER
NOMENCLATURE: LS-305( )/SIC; LS-306( )/SIC (Cont)
FEDERAL STOCK NO: 5965-636-2462; 5965-284-6579

PHYSICAL DESCRIPTION:

Nominal Diameter - - - - - - - - - - - - - - 11 inches (279.4 mm)

Over-all Dimensions;


Length - - - - - - - - - - - - - - - - - - - 10.938 inches (277.83 mm)
Width - 8.25 inches (209.55 mm)
Depth - 4.438 inches (112.73 mm)

Mounting Dimensions:

Refer to the following figure, arrangement of mounting holes:

Weight- 6 lbs. est.

ARRANGEMENT OF MOUNTING HOLES:

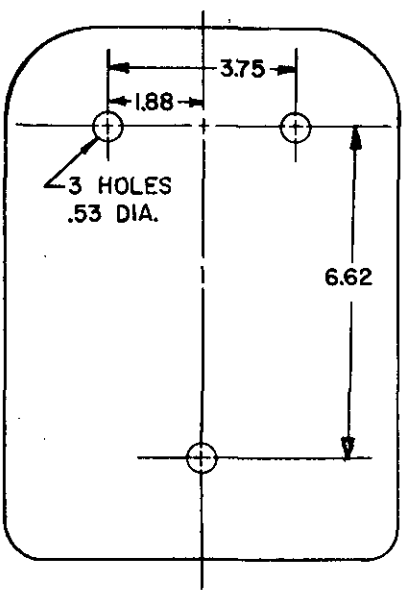

ADDITIONAL PHYSICAL DATA:

Case Material: Aluminum
Finish: Alkyd Resin Enamel, Light Navy Gray

TECHNICAL DESCRIPTION:

INPUT
Voice coil impedance - - - - - - - - - - - 7 ohms
Power handling rating- - - - - - - - - - - Not rated
Frequency range - - - - - - - - - - - - - 200 to 8,000 Hz

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: LOUDSPEAKER

NOMENCLATURE: LS-305( )/SIC; LS-306( )/SIC (Cont)

FEDERAL STOCK NO: 5965-636-2462; 5965-284-6579

ADDITIONAL TECHNICAL DATA:

Transformer Data:

The line transformer is tapped to allow use with either a 50 to 70 volt audio line. The input impedances available at the 70 volt tap at one kilocycle per second are: 5200; 16,900; 41,900; 59,200; 71,000 ohms. The input impedances at the 50 volt tap at one kilocycle are: 2600; 8200; 20,400; 29,200; 35,500 ohms.

REFERENCE DATA and LITERATURE

Jensen Manufacturing Company Instruction Note No. 171B.
MIL-A-20222
MIL-P-15328
MIL-E-15090 (Type 3, Class 2)
MIL-V-173A


MANUFACTURER CODE	PART NUMBER
32001	LS-305( )/SIC or LS-306( )/SIC

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: LOUDSPEAKER

NOMENCLATURE: LS-474/U

FEDERAL STOCK NO: 5965-892-3597

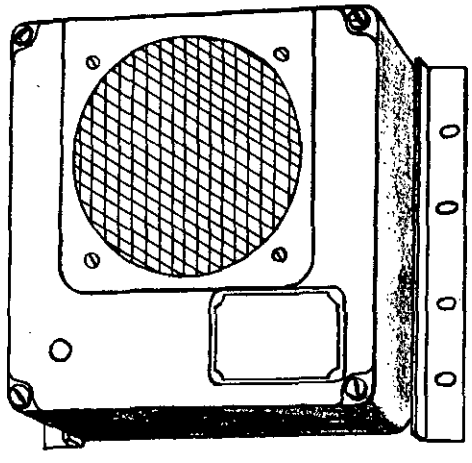

FUNCTIONAL DESCRIPTION:

The LS-474/U Loudspeaker is designed as a general purpose unit having provision for mounting on a wall, rack panel, or table top.

CONSISTS OF:

1 Loudspeaker LS-474/U

Including:
1 Cabinet, Including Mounting Brackets
1 Matching Transformer

RELATIONSHIP TO SIMILAR EQUIPMENT:

Similar to LS-195/U except for the single primary impedance transformer and elimination of attenuator.

ACCESSORIES:

A volume control, FSN N5905-201-3680, can be mounted on the front panel by removing the hole plug.

Two loudspeakers may be mounted on relay rack CY-597A/G.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: LOUDSPEAKER

NOMENCLATURE: LS-474/U (Cont)

FEDERAL STOCK NO: 5965-892-3597

PHYSICAL DESCRIPTION:

Weight - - - - - - - - - - - - - - - - - - Not available

Dimensions:

Length - - - - - - - - - - - - - - - -	8.562 inches (217.47 mm)
Width - - - - - - - - - - - - - - - - -	8.688 inches (220.68 mm)
Depth - - - - - - - - - - - - - - - - -	5 inches (127.0 mm)
Nominal Cone Diameter - - - - - - -	6 inches (152.4 mm)

Mounting Dimensions:

4-7/32 inch diameter mounting holes spaced 4.33 inches center to center.

4 mounting holes on flanges provide for installation on a bulkhead.

TECHNICAL DESCRIPTION:

INPUT

Voice coil impedance - - - - - - - -	3.2 ohms
Power handling rating - - - - - - - -	4 watts, nominal
Frequency range - - - - - - - - - - -	200 to 5,000 Hz

ADDITIONAL TECHNICAL DATA:

Transformer Primary Impedance - - - 600 ohms

REFERENCE DATA and LITERATURE

Fidelity Amplifier Company Instruction Sheet No. 100

MIL-L-17061


MANUFACTURER CODE	PART NUMBER
81349	LS-474/U

Source: https://assist.dla.mil -- Downloaded: 202640-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: LOUDSPEAKER

NOMENCLATURE: NT-491814

FEDERAL STOCK NO: 5965-252-0803

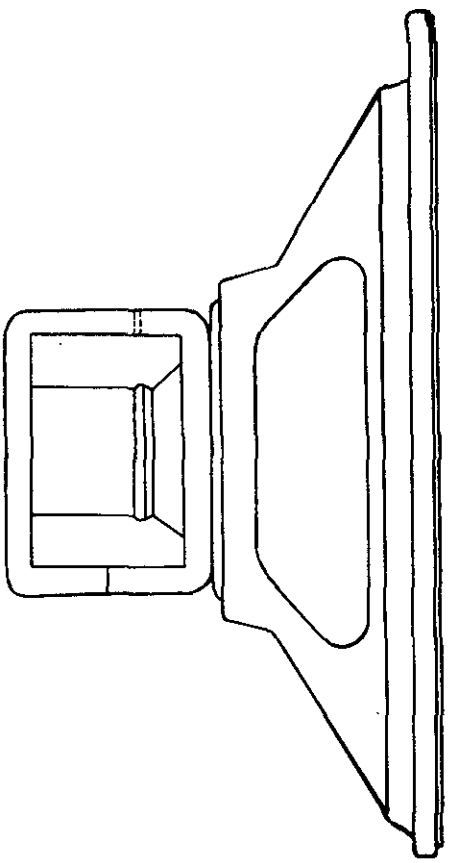

FUNCTIONAL DESCRIPTION:

The NT-491814 is a six-inch low impedance loudspeaker resistant to shock, vibration, and salt spray, which is suitable for shipboard and general purpose use.

CONSISTS OF:

1 Loudspeaker, Permanent Magnet NT-491814

Source: https://assist.dla.mil -- Downloaded: 202640-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: LOUDSPEAKER

NOMENCLATURE: NT-491814 (Cont)

FEDERAL STOCK NO: 5965-252-0803

RELATIONSHIP TO SIMILAR EQUIPMENT:

PHYSICAL DESCRIPTION:

Nominal Diameter	6 inches (152.4 mm)
Diameter	6-1/8 inches (155.58 mm)
Depth	3-1/8 inches (79.38 mm)
Weight	Not available

ADDITIONAL PHYSICAL DATA:

Mounting Dimensions:

Four slots .203 x .297 inches at the corners of a 4-1/4 inch square.

Finish:

All corrosive metal parts finished in gray enamel.

TECHNICAL DESCRIPTION:

INPUT

Voice coil impedance	3.2 ohms at 400 Hz
Power handling rating	4 watts
Frequency range	200 to 5,000 Hz

ADDITIONAL TECHNICAL DATA:

REFERENCE DATA and LITERATURE
RE49C764
MIL-E-16400
MIL-STD-202, Method 102A
MIL-S-901, (Type 1, Grade 1)
MIL-STD-167, (Type 1)

MANUFACTURER CODE	PART NUMBER
70215	B7240

Source: https://assist.dla.mil -- Downloaded: 202640-26T13:37Z
Check the source to verify that this is the current version before use.

SECTION 4

HEADSETS

Nomenclature, model or part number	Page
"A" #200	4.2.1
H-16 ( )/U	4.3.1
H-32 ( )/U	4.4.1
H-43B/U	4.5.1
H-65 ( )/U	4.6.1
H-113/U	4.7.1
H-139 ( )/GR	4.8.1
H-154/AIC	4.9.1
H-158/AIC	4.10.1
H-171 ( )/G	4.11.1
H-183 ( )/U	4.12.1
H-216 ( )/U	4.13.1
H-226/PPS-5	4.14.1
H-227 ( )/U	4.15.1
H-251/U	4.16.1
HS-16A	4.17.1
NT-49507B	4.18.1
NT-49985A	4.19.1
P-104J535-1	4.20.1
159	4.21.1
716D	4.22.1
24076	4.23.1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET

NOMENCLATURE: COMMERCIAL "A" #200

FEDERAL STOCK NO: 5965-170-4815



FUNCTIONAL DESCRIPTION:

This headset contains two crystal type earphone receivers mounted in a metal double band headband. The headset is primarily intended for use with the recorder and reproducer type number TCB-2 made by Dictaphone Corporation. The headset has a relatively flat response and is suitable for general purpose, voice applications in the laboratory or studio.

CONSISTS OF:

2	Earphone Receivers Brush Development Co. Type B-2107
1	Headband

RELATIONSHIP TO SIMILAR EQUIPMENT:

PHYSICAL DESCRIPTION:

Dimensions: (Earphone)

Depth	.938 inches (23.83 mm)
Diameter	2.078 inches (52.78 mm)

Cord Data:

Length	5 feet (1524.00 mm)
No. of Conductors	2
No. of Connectors	2
Connector Designation	Phone Tip, Brush Development Drawing No. B2024
Jacket Material	Cotton Braid

Source: https://assist.dla.mil -- Downloaded: 20261O-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET

NOMENCLATURE: COMMERCIAL "A" #200 (Cont)

FEDERAL STOCK NO: 5965-170-4815

ADDITIONAL PHYSICAL DATA:

Headband Data:

Material	Metal
Padding	Cloth
Type	Double Band Fixed

TECHNICAL DESCRIPTION: (HEADSET)

INPUT

Quantity of Earphones	2
Nominal Impedance	1 megohm ± 20 percent
Frequency Range	100 to 8,000 Hz

ADDITIONAL TECHNICAL DATA:

Environmental Limitations:

Pressure Cycling	0 to 50,000 feet

REFERENCE DATA and LITERATURE


MANUFACTURER CODE	PART NUMBER
09215	"A" #200

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET

NOMENCLATURE: H-16( )/U

FEDERAL STOCK NO: 5965-243-7782

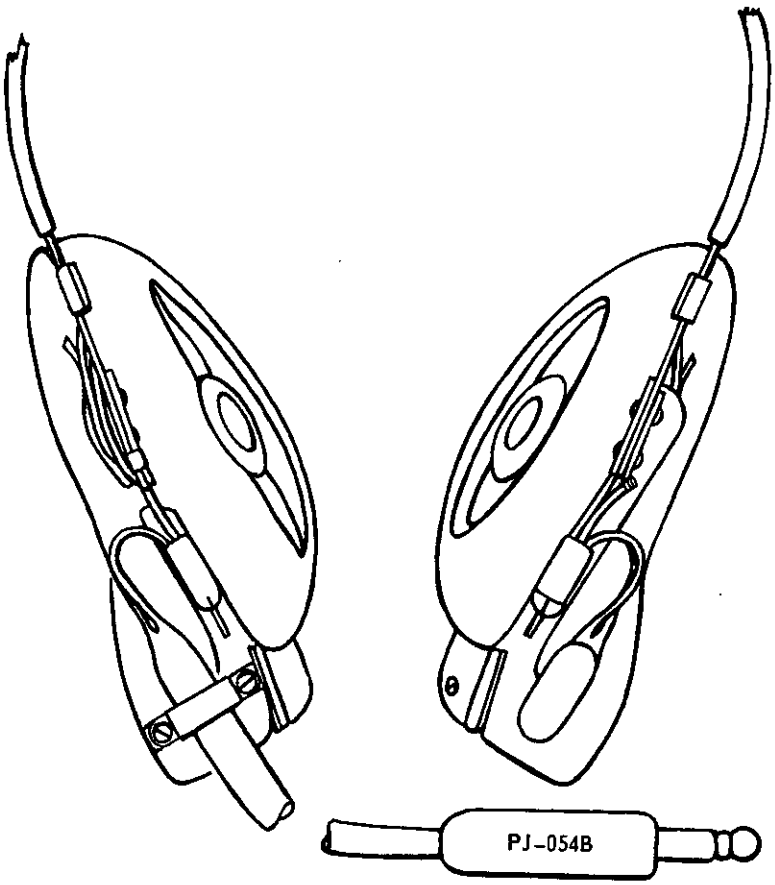

FUNCTIONAL DESCRIPTION:

Headset H-16( )/U is intended to be used in noisy locations such as tanks, destroyers, etc. It consists of two magnetic receiver elements and two matching transformers. The earcups incorporate slide adjustment for attachment to the headband.

CONSISTS OF:

2	Magnesium Earcups, MX-239( )/U and MX-240( )/U
2	Magnetic Receiver Elements R-30-U
2	Matching Transformers
1	Headband MX-175( )/U
1	Cord
1	Plug PJ-054B

RELATIONSHIP TO SIMILAR EQUIPMENT:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET

NOMENCLATURE: H-16( )/U (Cont)

FEDERAL STOCK NO: 5965-243-7782

PHYSICAL DESCRIPTION:

Earphone Dimensions:	
Over-all Diameter	.906 inches (23.02 mm)
Depth	.688 inches (17.46 mm)
Cord Data:	
Length	65.125 inches (1,654.18 mm)
Jacket Material	Rubber
Number of Connectors	1
Connector Designation	PJ-054B

ADDITIONAL PHYSICAL DATA:

Headband Data:	
Type	Single Band Adjustable
Material	Rubber-covered Metal

TECHNICAL DESCRIPTION:

INPUT	
Quantity of Earphones	2
Nominal Impedance	8,000 ohms (in series)
Frequency Range	400 to 2,600 Hz

ADDITIONAL TECHNICAL DATA:

Transformer Data:	
Primary Impedance	400 ohms
Secondary Impedance	20 ohms

ENVIRONMENTAL LIMITATIONS:

Temperature Range:	
In Operation	-40° F to +125° F
In Transportation	-65° F to +183° F
Salt atmosphere	As in coastal regions and ocean transportation
Dust	Withstands particles between 10 and 50 microns in any reasonable distribution and concentration
Altitude	Sea level to 50,000 feet
Immersion	Withstands immersion in 6 inches of water for 10 minutes

REFERENCE DATA and LITERATURE

MIL-H-12487


MANUFACTURER CODE	PART NUMBER
80063	H-16( )/U

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET

NOMENCLATURE: H-32 ( )/U

FEDERAL STOCK NO: 5965-222-0282

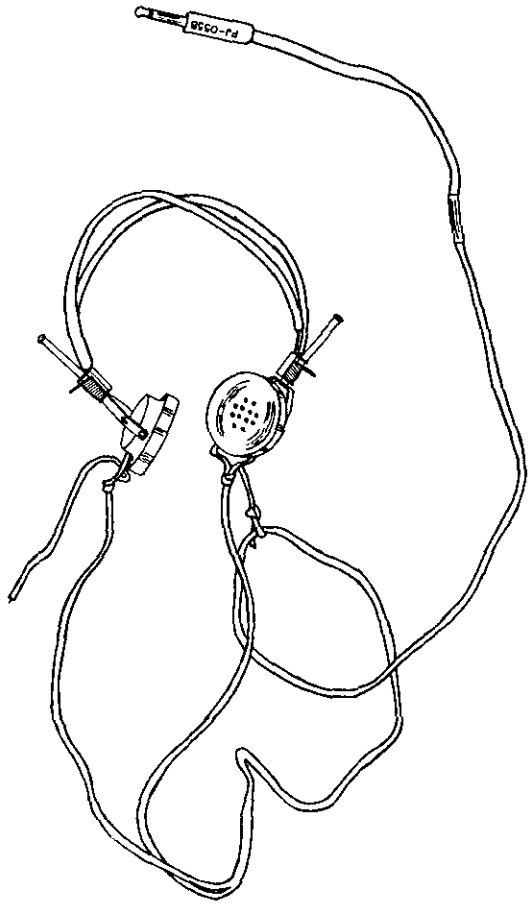

FUNCTIONAL DESCRIPTION:

This headset contains two earphones with adjustable headband, cord, and a telephone plug. It is a special purpose unit.

CONSISTS OF:

1 Headset H-32 ( )/U

RELATIONSHIP TO SIMILAR EQUIPMENT:

PHYSICAL DESCRIPTION:

Dimensions: (Earphone)

Depth	.75 inches (19.05 mm)
Diameter	2.62 inches (66.55 mm)

Headset Cord Data:

Length	60 ± 2 inches (15.24 mm ± 50.8 mm) (from earphones to plug)
No. of Conductors	2
Covering	Rubber
Connector Designation	PJ-055B

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET

NOMENCLATURE: H-32 ( )/U (Cont)

FEDERAL STOCK NO: 5965-222-0282

ADDITIONAL PHYSICAL DATA:

Weight - - - - - - - - - - - - - - - - - 8 oz.

TECHNICAL DESCRIPTION: (HEADSET)

INPUT

Quantity of Earphones - - - - - - - 2
Impedance - - - - - - - - - - - - - 8,500 ± 20% per unit

ADDITIONAL TECHNICAL DATA:

REFERENCE DATA and LITERATURE


MANUFACTURER CODE	PART NUMBER
80058 81812	H-32 ( )/U H-157

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET

NOMENCLATURE: H-43B/U

FEDERAL STOCK NO: 5965-651-7372

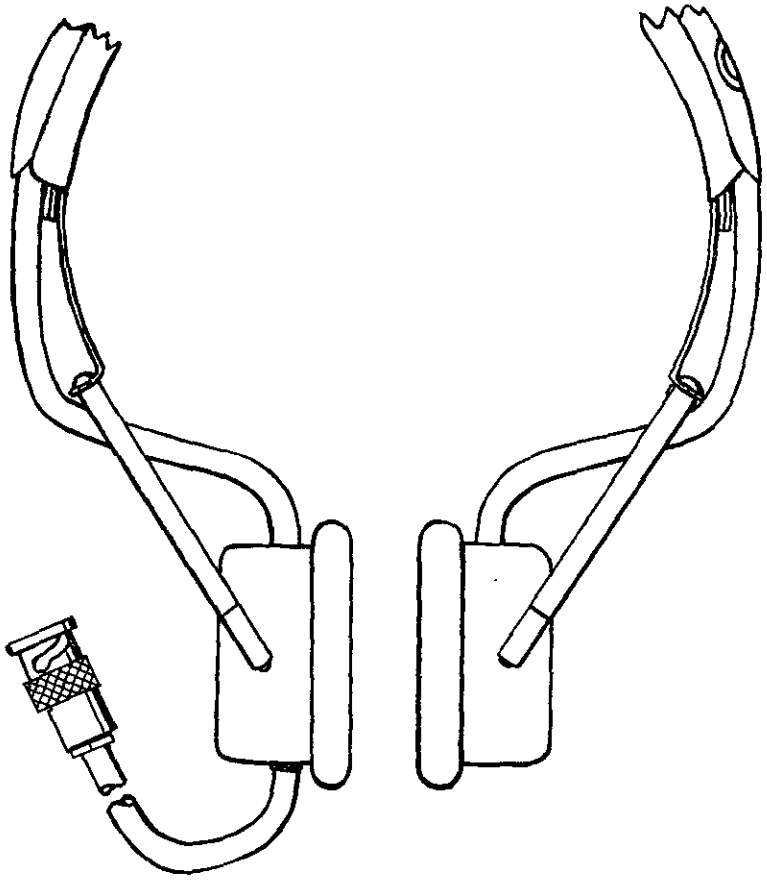

FUNCTIONAL DESCRIPTION:

The H-43B/U is a high impedance two-earphone headset suitable for use under the standard military metal helmet.

CONSISTS OF:

1	Earphone	Navy Type CTE-491964
1	Earphone	Navy Type CTE-491965
1	Headband	Type 14146-1
1	Cord Assembly	
1	Connector	UG-88( )/U

RELATIONSHIP TO SIMILAR EQUIPMENT:

Similar to and interchangeable with headset H-43/U.

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET

NOMENCLATURE: H-43B/U (Cont)

FEDERAL STOCK NO: 5965-651-7372

PHYSICAL DESCRIPTION:

Dimensions: (Earphone)

Depth	1 inch (25.4 mm)
Diameter	2 inches (50.8 mm)

Cord Data:

Length	34 inches (863.6 mm)
No. of Conductors	2
Connector Designation	UG-88( )/U
Jacket Material	Rubber

ADDITIONAL PHYSICAL DATA:

Headband Data:

Material	Steel
Padding	Cloth
Type	Single Band, Adjustable

TECHNICAL DESCRIPTION: (HEADSET)

INPUT

Quantity of Earphones	2
Nominal Impedance	20,000 ohms ± 20 percent (in series)
Frequency Range	Not rated

ADDITIONAL TECHNICAL DATA:

FREQUENCY OF MAXIMUM RESPONSE:

1,000 Hz ± 150 Hz

HARMONIC DISTORTION

15 percent maximum at 1,000 Hz and an input level of one milliwatt

ENVIRONMENTAL LIMITATIONS

Temperature range - - - - - - - - - - -40°C to +55°C

REFERENCE DATA and LITERATURE


MANUFACTURER CODE	PART NUMBER
80058	H-43B/U

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET

NOMENCLATURE: H-65 ( )/U

FEDERAL STOCK NO: 5965-223-4572

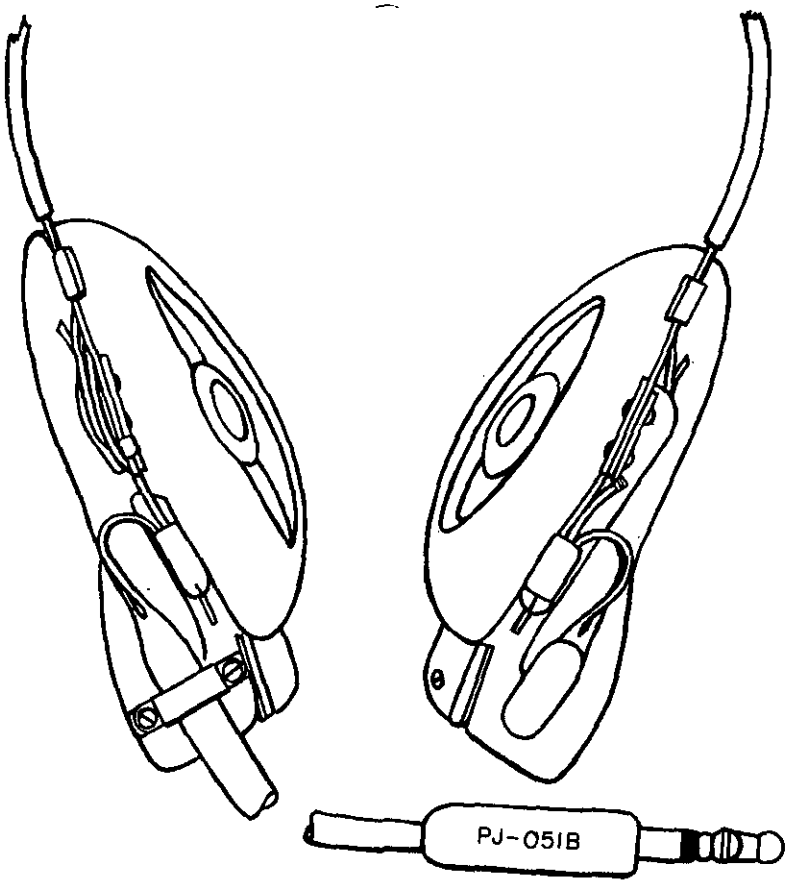

FUNCTIONAL DESCRIPTION:

Headset H-65 ( )/U is designed to be used with radar equipment where the operator is required to monitor two channels at the same time.

CONSISTS OF:

2	Magnesium Earcups, MX-239 ( )/U and MX-240 ( )/U
2	Magnetic Receiver Elements R-30-U
2	Matching Transformers
1	Headband MX-175 ( )/U
1	Cord
1	Plug PJ-051B

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET

NOMENCLATURE: H-65 ( )/U (Cont)

FEDERAL STOCK NO: 5965-223-4572

RELATIONSHIP TO SIMILAR EQUIPMENT:

Headset, Elect. H-65 ( )/U magnetic is similar to Headset, Elect. H-16 ( )/U, except that the connecting cord is approximately 4 feet long and terminates in Plug PJ-051, connected in a manner that an operator can monitor two separate channels at the same time.

PHYSICAL DESCRIPTION:

Earphone Dimensions:

Overall Diameter	.91 inches (23.11 mm)
Depth	.69 inches (17.53 mm)

Cord Data:

Length	48 inches (approx) (1,235.2 mm)
Jacket Material	Rubber
Number of Connectors	1
Connector Designation	PJ-051B

ADDITIONAL PHYSICAL DATA:

Headband Data:

Type	Single Band Adjustable
Material	Rubber-covered Metal

TECHNICAL DESCRIPTION:

INPUT

Quantity of Earphones	2
Nominal Impedance	4,000 ohms (each earphone)
Frequency Range	400 to 2,600 Hz

ADDITIONAL TECHNICAL DATA:

Transformer Data:

Primary Impedance	4,000 to 6,000 ohms
Secondary Impedance	125 ohms

ENVIRONMENTAL LIMITATIONS:

Temperature Range:	
In Operation	-40°F to +125°F
In Transportation	-65°F to +183°F
Salt atmosphere	As in coastal regions and ocean transportation
Dust	Withstands particles between 10 and 50 microns in any reasonable distribution and concentration
Altitude	Sea level to 50,000 feet
Immersion	Withstands immersion in 6 inches of water for 10 minutes

Source: https://assist.dla.mil -- Downloaded: 202640-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET

NOMENCLATURE: H-65 ( )/U (Cont)

FEDERAL STOCK NO: 5965-223-4572

REFERENCE DATA and LITERATURE

MIL-H-12487
SC-DL-19426
SC-DL-24222

MANUFACTURER CODE	PART NUMBER
80063	H-65 ( )/U

Source: https://assist.dla.mil -- Downloaded: 202640-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET

NOMENCLATURE: H-113/U

FEDERAL STOCK NO: 5965-504-6370



FUNCTIONAL DESCRIPTION:

This Electrical Headset, H-113/U, is a general purpose headset used as a receiver for radio and wire equipment. It contains two magnetic earphone receivers suspended on a single band steel headband.

CONSISTS OF:

1 Electrical Headset H-113/U

Consisting of:

2 Earphone Receivers Connecticut Telephone and Electric Corp. Part Number G-14225
1 Headband
2 Earphone Cushions Connecticut Telephone and Electric Corp. Part Number G-14205

RELATIONSHIP TO SIMILAR EQUIPMENT:

PHYSICAL DESCRIPTION:

Dimensions: (Earphone)

Depth	0.603 inch (15.32 mm)
Diameter	1.984 inches (50.39 mm)

Cord Data:

Length	16 inches (351.60 mm)
Number of Conductors	2
Number of Connectors	1
Connector Designation	PJ-054B
Jacket Material	Rubber

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET

NOMENCLATURE: H-113/U (Cont)

FEDERAL STOCK NO: 5965-504-6370

ADDITIONAL PHYSICAL DATA:

Headband Data:

Material	Steel
Padding	Plastic
Type	Single Band, Adjustable

TECHNICAL DESCRIPTION: (HEADSET)

INPUT

Quantity of Earphones	2
Nominal Impedance	600 ohms
Frequency Range	300 to 4,000 Hz

ADDITIONAL TECHNICAL DATA:

ENVIRONMENTAL LIMITATIONS:

Equipment Nonoperating:

Temperature Range	-80° F to +160° F (High temperature extreme not more than 4 hours, and low temperature extreme not more than 24 hours at any one time.)
Relative Humidity	Up to 97 percent for indefinite period. Exposure at 100 percent with condensation for 4 hours.
Elevation	Up to 50,000 feet above sea level.
Orientation	Indefinite storage in any orientation.
Salt Spray	Withstands 20 percent salt spray test, Method 101, Condition A, MIL-STD-202.
Vibration	Withstands Vibration test of MIL-H-11190.
Bounce	Withstands Bounce test of MIL-H-11190.
Shock	Withstands 3 foot drops on each corner, edge, and face onto a 2 inch tin floor backed by concrete or rigid steel frame.
Blast	Withstands gunblast test of MIL-STD-108, degree 2.

Equipment Operating:

Temperature Range	-40° F to +150° F (High temperature extreme not more than 4 hours and low extreme not more than 72 hours.)
Relative Humidity	Up to 97 percent indefinitely 100% with condensation for 4 hours.
Elevation	Up to 15,000 feet above sea level.

REFERENCE DATA and LITERATURE

MIL-H-11190
MSS 5965-1
Telephonics Corporation Final Report of Technical Analysis Phase of Standardization Studies and Surveys of Headsets and Headset-Microphones


MANUFACTURER CODE	PART NUMBER
80058	H-113/U

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET

NOMENCLATURE: H-139 ( )/GR

FEDERAL STOCK NO: 5965-084-0531

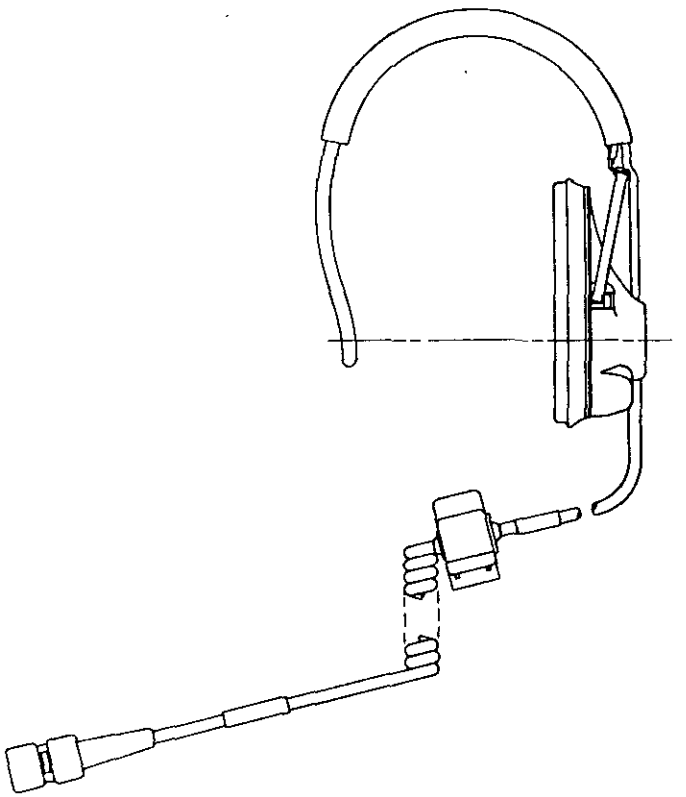

FUNCTIONAL DESCRIPTION:

The headset has a single earphone with a flexible headband and a fold-away earphone intended for use in low and medium ambient noise areas.

CONSISTS OF:

1 Attenuation Plate
1 Impedance Matching Transformer
1 Earphone Receiver, Dynamic
1 Ear cushion
1 Headband
1 Connector - U-182
1 Toggle Switch

RELATIONSHIP TO SIMILAR EQUIPMENT:

The H-139 ( )/GR, H-141 ( )/GR, and H-161 ( )/GR have identical earphone assemblies.

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET

NOMENCLATURE: H-139 ( )/GR (Cont)

FEDERAL STOCK NO: 5965-084-0531

PHYSICAL DESCRIPTION:

Dimensions: (Earphone)

Depth	1.225 inches
Width	3.270 inches
Length	4.225 inches

Cord Data:

Length (contracted)	20 ± 2 inches (508.0 ± 50.8 mm)
Length (extended)	72 ± 2 inches (1829 ± 50.8 mm)
Quantity of Conductors	5
Quantity of Connectors	1
Connector Designation	U-182 ( )/U

ADDITIONAL PHYSICAL DATA:

Headband Data:

Material	Steel
Type	Double Band, Adjustable

TECHNICAL DESCRIPTION: (HEADSET)

INPUT

Quantity of Earphones	1
Nominal Impedance	1,000 ohms at terminal
Frequency Range	300 to 3,500 Hz

ADDITIONAL TECHNICAL DATA:

ENVIRONMENTAL LIMITATIONS:

Elevation (nonoperating)	0 to 50,000 feet
Elevation (operating)	0 to 15,000 feet
Immersion	3 feet water, 2 hours
Salt Spray	20% at 96°F for 48 hours
Blast	SK-N-864
Vibration	Method 201 of MIL-STD-202
Bounce	Package tester
Shock, Drop	6 feet, 12 times concrete floor

REFERENCE DATA and LITERATURE

MIL-E-55119
Drawing SC-DL-436200 covering Headset Electrical H-140 ( )/U shall apply, except the headband is a single earphone type.


MANUFACTURER CODE	PART NUMBER
80063	H-139 ( )/U

Source: https://assist.dla.mil -- Downloaded: 202640-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET

NOMENCLATURE: H-154/AIC

FEDERAL STOCK NO: 5965-856-0552

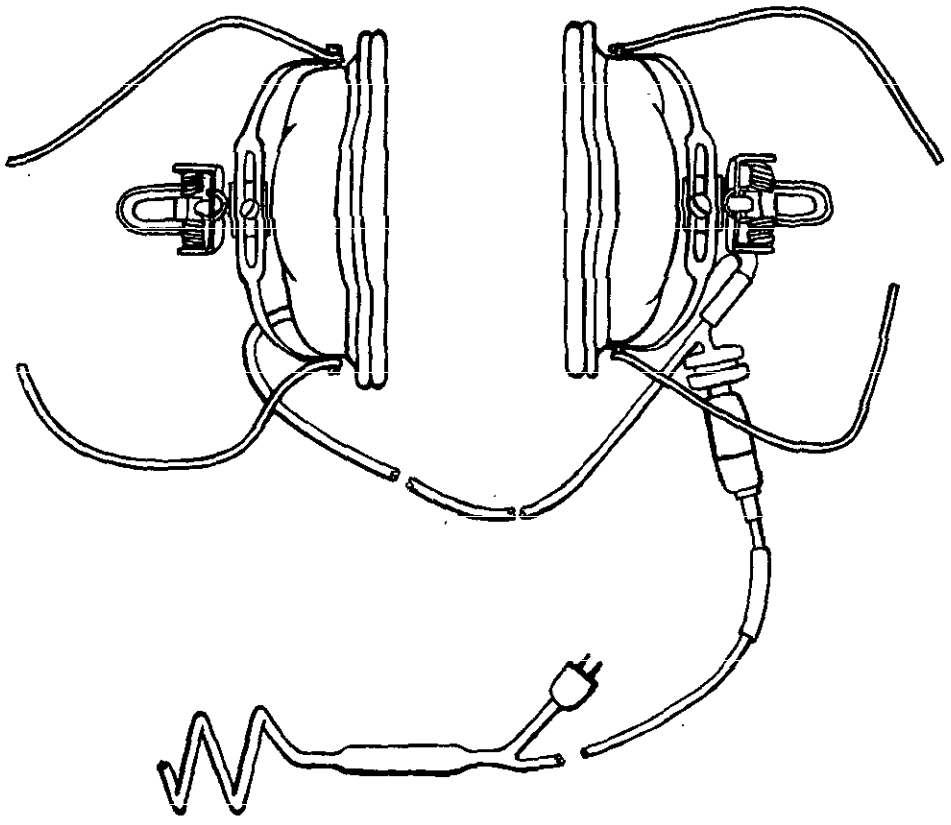

FUNCTIONAL DESCRIPTION:

The H-154/AIC is intended for use with Flying Helmet HGU-2A/P. The headset includes a plug connector to plug in a low-impedance dynamic microphone which is mounted in an oxygen mask. The headset is intended for use with Intercommunication Sets AN/AIC-10 and AN/AIC-18 to provide communication of high intelligibility under the extreme noise conditions encountered in military aircraft.

CONSISTS OF:

2 Earphones H-143/AIC
2 Earphone Shells MX-3678/AIC and MX-3679/AIC
2 Cord Assemblies CX4707A/AIC and CX4708A/AIC

RELATIONSHIP TO SIMILAR EQUIPMENT:

Source: https://assist.dla.mil -- Downloaded: 202640-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET

NOMENCLATURE: H-154/AIC (Cont)

FEDERAL STOCK NO: 5965-856-0552

PHYSICAL DESCRIPTION:

Earphone Dimensions:

Nominal Diameter	2 inches (50.8 mm)
Depth	0.45 inches (11.43 mm)

Cable Data: (CX-4707A/AIC)

Length	1 foot 7 inches (482.6 mm)
Jacket Material	Nylon Braid

Cable Data: (CX-4708/AIC)

Length	2 feet 3 inches (685.8 mm)
Jacket Material	Nylon Braid

ADDITIONAL PHYSICAL DATA:

Headband Data:

Type	Single band, adjustable
Material	Plastic covered steel
Connector type	Phone plug

TECHNICAL DESCRIPTION:

INPUT

Quantity of Earphones	2
Nominal Impedance	10 ohms (in parallel)
Frequency Range	100 to 5,500 Hz

ADDITIONAL TECHNICAL DATA:

ENVIRONMENTAL LIMITATIONS:

Temperature	-55° C to +85° C
Altitude	Sea level to 25,000 feet

REFERENCE DATA and LITERATURE

MIL-H-27467

MIL-E-25670

AF Drawing 60D4292


MANUFACTURER CODE	PART NUMBER
82872	10557
80058	H-154/AIC

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET

NOMENCLATURE: H-158/AIC

FEDERAL STOCK NO: 5965-841-1372

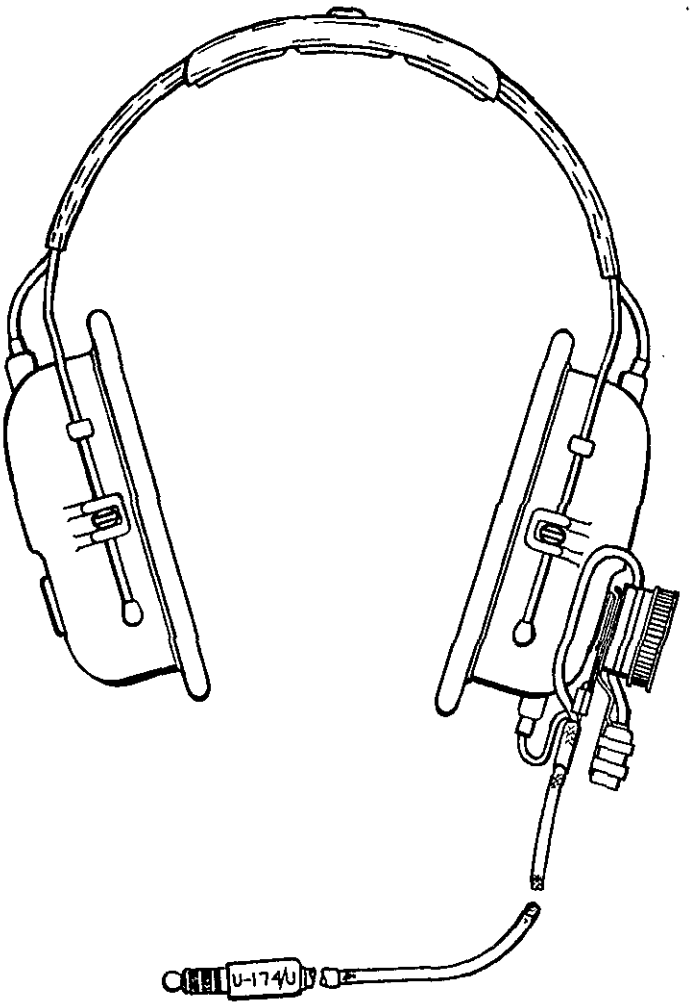

FUNCTIONAL DESCRIPTION:

The H-158/AIC is a headband type headset intended for use at low altitudes as part of Intercommunication Set AN/AIC-10( ) to provide communication of high intelligibility under the extreme noise conditions encountered in Military Aircraft.

CONSISTS OF:

2	Earphones H-143/AIC
2	Earphone Shells MX-2508/AIC and MX-3473/AIC
1	Headband MX-2506/AIC
2	Cord Assemblies CX-4434/U and CX-4435/U
1	Microphone Bracket MT-2007/AIC
1	Connector Telephone plug type U-174/U

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:37Z
Check the source to verify that this is the currentversion before use.

ITEM NAME: HEADSET

NOMENCLATURE: H-158/AIC (Cont)

FEDERAL STOCK NO: 5965-841-1372

RELATIONSHIP TO SIMILAR EQUIPMENT

Headset H-158/AIC is similar to headset-microphone H-157/AIC, except for the microphone.

PHYSICAL DESCRIPTION:

Earphone Dimensions:	
Nominal Diameter	2 inches (50.8 mm)
Depth	0.45 inches (11.43 mm)
Cord Data: (CX-4434/U)	
Length	1 foot 4 inches (406.4 mm)
Jacket Material	Nylon braid
Cord Data: (CX-4435/U)	
Length	2 feet 4.50 inches (723.9 mm)
Jacket Material	Nylon braid

ADDITIONAL PHYSICAL DATA:

Headband Data:	
Type	Single Band
Construction	Extruded plastic webbing over two steel wires
Connector Data:	
Number of Connectors	1
Connector Type	Telephone Plug
Earphone Weight	35 Grams Max.

TECHNICAL DESCRIPTION: (EARPHONE)

INPUT	
Quantity of Earhones	2
Nominal Impedance	10 ohms (in parallel)
Frequency Range	100 to 5,500 Hz

ADDITIONAL TECHNICAL DATA:

ENVIRONMENTAL LIMITATIONS:	
Temperature	-55° C to +85° C
Altitude (Operation	25,000 feet
Altitude (Transportation)	50,000 feet

REFERENCE DATA and LITERATURE

MIL-H-26541
Air Force Drawing 58C 12682

MANUFACTURER CODE	PART NUMBER
80058 82872	H-158/AIC 10558

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET

NOMENCLATURE: H-171 ( )/G

FEDERAL STOCK NO: 5965-542-7125

NO ILLUSTRATION AVAILABLE

FUNCTIONAL DESCRIPTION:

This headset contains two dynamic earphones with a headband that is adjustable, double, and plastic covered steel. The cord has a telephone plug.

CONSISTS OF:

1 Headset H-171 ( )/G

RELATIONSHIP TO SIMILAR EQUIPMENT:

PHYSICAL DESCRIPTION:

Dimensions: (Headset)

Length	4.688 inches (119.08 mm)
Width	3.625 inches (92.08 mm)
Depth	1.594 inches (40.49 mm)

Headset Cord Data:

Length	73 ± 3 inches (1854.2 mm ± 76.2 mm)
No. of Conductors	2
Covering	Nylon braid with latex
Connector Designation	PJ-055B

ADDITIONAL PHYSICAL DATA:

Weight	8 oz.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET

NOMENCLATURE: H-171 ( )/G (Cont)

FEDERAL STOCK NO: 5965-542-7125

TECHNICAL DESCRIPTION: (HEADSET)

INPUT

Quantity of Earphones - - - - - - - - 2
Impedance - - - - - - - - - - - - - - - 11 ohms
Frequency Range - - - - - - - - - - - (Not available)

ADDITIONAL TECHNICAL DATA:

Earphones are Connected in Parallel.

REFERENCE DATA and LITERATURE

MSS 5965-1A

MANUFACTURER CODE	PART NUMBER
80063	H-171 ( )/G

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET

NOMENCLATURE: H-183 ( )/U

FEDERAL STOCK NO: 5965-682-2575

NO ILLUSTRATION AVAILABLE

FUNCTIONAL DESCRIPTION:

This headset contains two dynamic earphones with a single adjustable copper headband, cord, telephone plug, and clip for holding cord assembly to clothing.

CONSISTS OF:

1 Headset H-183 ( )/U

RELATIONSHIP TO SIMILAR EQUIPMENT:

PHYSICAL DESCRIPTION:

Dimensions: (Earphone)

Depth	.75 inches (19.05 mm)
Diameter	2.0 inches (50.8 mm)

Cable Data:

Length	72 inches (1829 mm)
No. of Conductors	2
No. of Connectors	1
Connector Designation	PJ-055B
Jacket Material	Rubber

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET

NOMENCLATURE: H-183 ( )/U (Cont)

FEDERAL STOCK NO: 5965-682-2575

TECHNICAL DESCRIPTION: (HEADSET)

INPUT

Quantity of Earphones - - - - - -	2
Nominal Impedance - - - - - - - -	2 ohms
Frequency Range - - - - - - - - -	Not rated

ADDITIONAL TECHNICAL DATA:

Earphones are Connected in Parallel

REFERENCE DATA and LITERATURE


MANUFACTURER CODE	PART NUMBER
80063	H-183/PP-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET

NOMENCLATURE: H-216 ( )/U

FEDERAL STOCK NO: 5965-892-3353

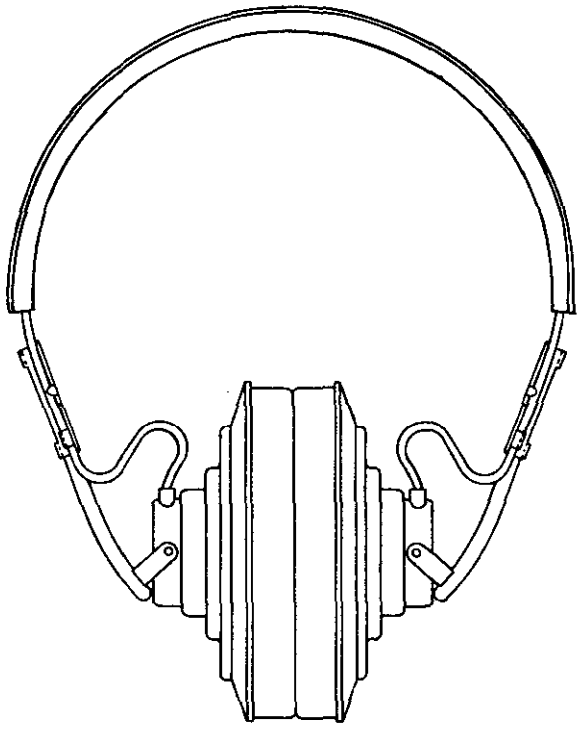

FUNCTIONAL DESCRIPTION:

This headset has an extended frequency range of 100 to 7,000 Hz. This range makes the headset useful for such applications sonar.

CONSISTS OF:

2	Earphones - H-301/U
1	Headband and Cover - HB-7
1	Plug - PJ-054R
2	Earphone Cushions - MS75127

RELATIONSHIP TO SIMILAR EQUIPMENT:

PHYSICAL DESCRIPTION:

Dimensions:

Width	6.25 inches (158.75 mm)
Length (Extended)	9.06 inches (230.12 mm)
Earphone Cushion:	
Height	4.38 inches (111.25 mm)
Depth	3.44 inches (87.38 mm)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET
NOMENCLATURE: H-216 ( )/U (Cont)
FEDERAL STOCK NO: 5965-892-3353

PHYSICAL DESCRIPTION: (Cont)

Cable Data:

Length	72 inches (1829 mm)
No. of Conductors	2
No. of Connectors	1
Connector Designation	PJ-054R
Jacket Material	Cloth

ADDITIONAL PHYSICAL DATA:

Headband Data:

Material	Stainless Steel
Cover	Black Vinyl
Type	Double Band Adjustable

TECHNICAL DESCRIPTION: (HEADSET)

INPUT

Quantity of Earphones	2
Nominal Impedance	600 ohms
Frequency Range	100 to 7,000 Hz

ADDITIONAL TECHNICAL DATA:

Environmental Limitations:

Pressure Cycling	0 to 50,000 feet
Shock	Six-foot drops onto concrete surface with minimal electrical and physical damage.
Salt Spray	5% Salt Solution, Method 101 of MIL-STD-202

REFERENCE DATA and LITERATURE

MIL-H-55353
MS-75105 thru MS-75130


MANUFACTURER CODE	PART NUMBER
80063	H-216 ( )/U

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET

NOMENCLATURE: H-226/PPS-5

FEDERAL STOCK NO: 5965-116-5363

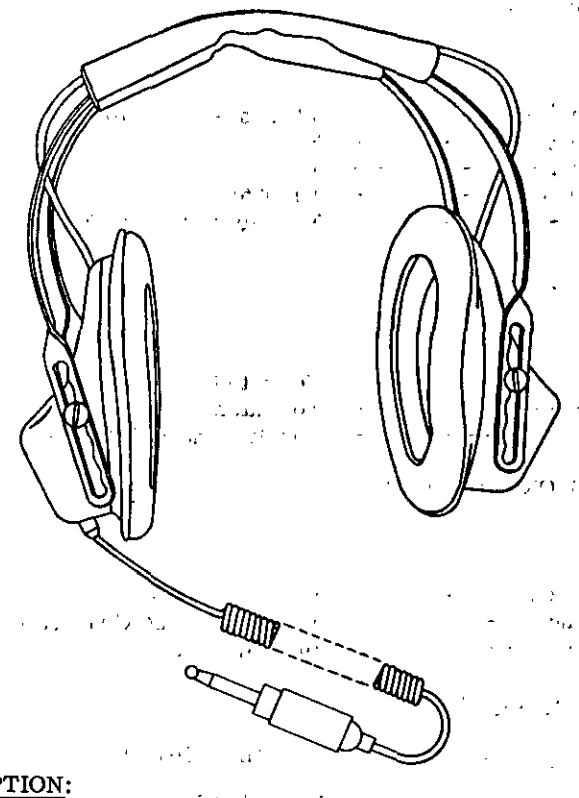

FUNCTIONAL DESCRIPTION:

This headset contains two earphones with adjustable headband, retractile cord and a telephone plug.

CONSISTS OF:

1	Left-hand Receiver
1	Right-hand Receiver
1	Cord Assembly - Miniature Coil per MIL-C-55668
1	Plug PJ-055B

RELATIONSHIP TO SIMILAR EQUIPMENT:

Used as Part of AN/PPS-5 System.

PHYSICAL DESCRIPTION:

Dimensions: (Overall)

Height	8 inches (approx) (203.2 mm)
Width	5.5 inches (approx) (128.27 mm)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET

NOMENCLATURE: H-226/PPS-5 (Cont)

FEDERAL STOCK NO: 5965-116-5363

PHYSICAL DESCRIPTION: (Cont)

Cable Data:

Length (Extended)	72 inches (1829 mm)
No. of Conductors	2
No. of Connectors	1
Connector Designation	PJ-055B
Cord	Miniature Coil per MIL-C-55668

ADDITIONAL PHYSICAL DATA:

Headband Data:

Material	Not rated
Padding	Not rated
Type	Double Band Adjustable

TECHNICAL DESCRIPTION: (HEADSET)

INPUT

Quantity of Earphones	2
Nominal Impedance	500 ohms at the Connector
Frequency Range	20 to 3,500 Hz

ADDITIONAL TECHNICAL DATA:

Environmental Limitations (Procedure I of MIL-STD-810):

Altitude	Method 500
High Temperature	Method 501
Low Temperature	Method 502
Rain	Method 506
Humidity	Method 507
Fungus	Method 508
Salt Fog	Method 509
Sand and Dust	Method 510
Immersion	Method 512
Vibration	Method 514
Shock	Drop - 12 times at 6 feet

REFERENCE DATA and LITERATURE

SM-C-610346
SC DL-SMA 610085


MANUFACTURER CODE	PART NUMBER
80063 81134	H-226A/PPS-5 994-7471

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET

NOMENCLATURE: H-227 ( )/U

FEDERAL STOCK NO: 5965-226-2915

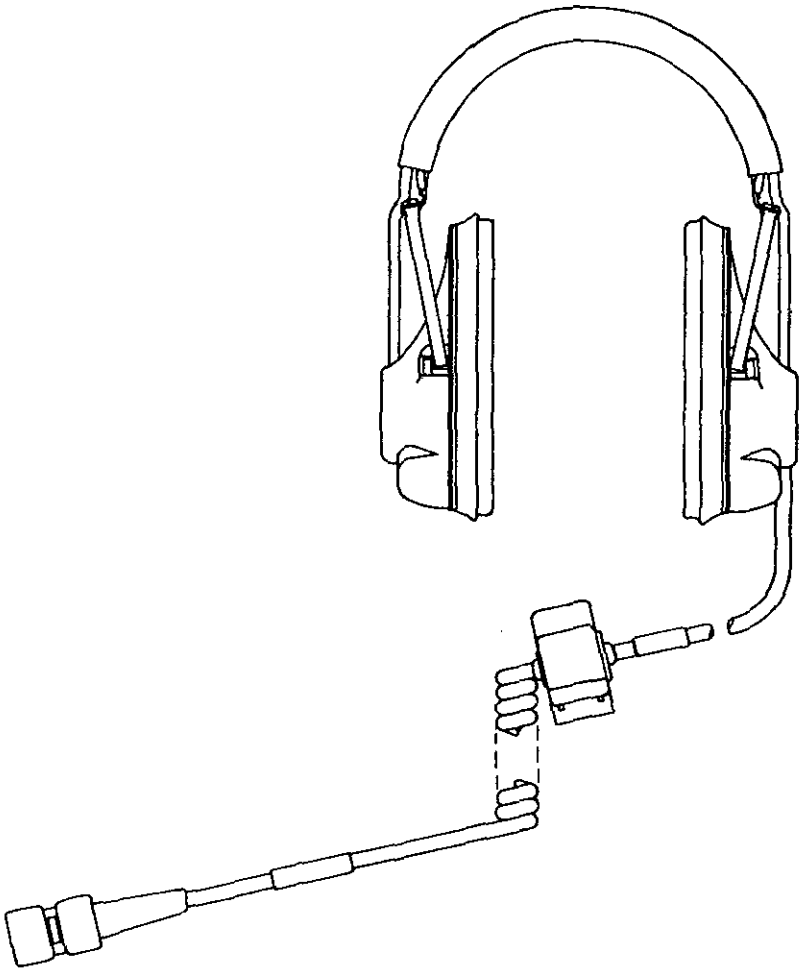

FUNCTIONAL DESCRIPTION:

This headset is a double earphone headset with a flexible headband. The headset is intended for use in medium and high ambient noise areas.

CONSISTS OF:

2	Earphone and Cup Assemblies - SM-D-436220
1	Headband Assembly - SM-C-436228
1	Clothing Clip on Cord - SM-B-436240
1	Retractile Cord Assembly - SM-B-436226
1	Plug - U161

Source: https://assist.dla.mil -- Downloaded: 202640-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET

NOMENCLATURE: H-227( )/U (Cont)

FEDERAL STOCK NO: 5965-226-2915

RELATIONSHIP TO SIMILAR EQUIPMENT:

This headset is identical to headset H-140 ( )/GR, except plug U-161 replaces plug U-182/U. The earphone assemblies of H-139 ( )/GR, H-140 ( )/GR, H-141 ( )/GR, and H-161 ( )/GR are identical.

PHYSICAL DESCRIPTION:

Dimensions: (Earphone)

Depth	1.219 inches (30.96 mm)
Diameter	2.375 inches (60.33 mm)

Cable Data:

Length (Retracted)	10.5 inches (266.70 mm)
Length (Extended)	48 inches (1,036.32 mm)
No. of Conductors	3
No. of Connectors	1
Connector Designation	U-161

ADDITIONAL PHYSICAL DATA:

Headband Data:

Material	Cotton Web
Padding	Cotton Web
Type	Single Band Adjustable

TECHNICAL DESCRIPTION: (HEADSET)

INPUT

Quantity of Earphones	1
Nominal Impedance	250 ohms
Frequency Range	Not rated

ADDITIONAL TECHNICAL DATA:

Environmental Limitations:

Pressure Cycling	0 to 50,000 feet
Shock	12 five-foot drops onto concrete surface with minimal electrical and physical damage.

REFERENCE DATA and LITERATURE

MIL-E-55119
SC-DL-436200


MANUFACTURER CODE	PART NUMBER
80063	H-227 ( )/U

Source: https://assist.dla.mil -- Downloaded: 202640-26T13:37Z
Check the source to verify that this is the currentversion before use.

ITEM NAME: HEADSET

NOMENCLATURE: H-251/U

FEDERAL STOCK NO: 5965-043-3460

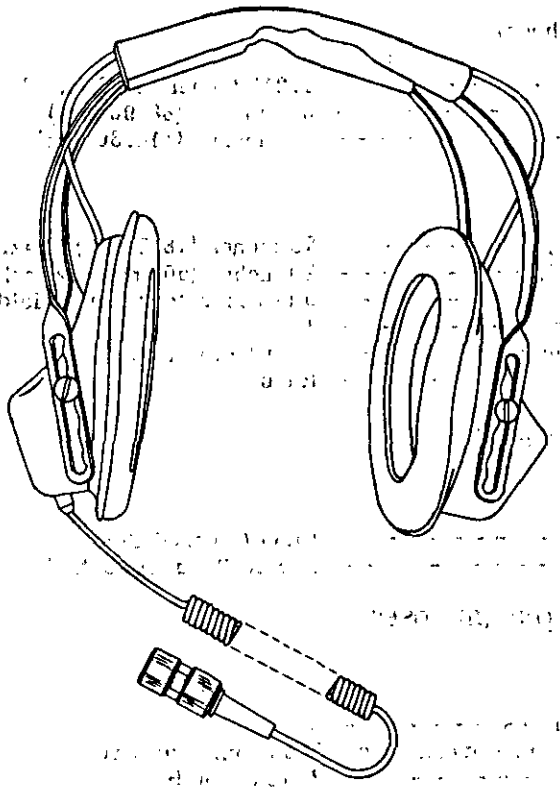

FUNCTIONAL DESCRIPTION:

This headset is suitable for outdoor use with manpack radio sets and fits under the infantryman helmet M-1 and provides maximum comfort consistent with the electrical and acoustical requirements.

CONSISTS OF:

1	Adjustable Headband
2	Plastic Earcups
2	Dynamic Moving Coil Earphones
1	Retractile Cord - MIL-C-55668
1	Plug - U-182BU

RELATIONSHIP TO SIMILAR EQUIPMENT:

This headset was designed for a replacement (electrical, mechanical, and performance) of the H-140/GR headset, with a lighter weight acoustic accessory.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET

NOMENCLATURE: H-251/U (Cont)

FEDERAL STOCK NO: 5965-043-3460

PHYSICAL DESCRIPTION:

Dimensions: (Earphone)

Depth	1.219 inches (30.96 mm)
Width	3.5 inches (88.90 mm)
Height	4.5 inches (114.30 mm)

Cable Data:

Length (extended)	72 inches (1829 mm) (maximum)
Length (retracted)	20 inches (508 mm) ±2 inches (50.8 mm)
No. of Conductors	5 (4 conductors, one shield)
No. of Connectors	1
Connector Designation	Plug U-182 B/U
Jacket Material	Rubber

ADDITIONAL PHYSICAL DATA:

Headband Data:

Material	Vinyl Covered Cloth
Type	Double Band, Adjustable

TECHNICAL DESCRIPTION: (HEADSET)

INPUT

Quantity of Earphones	2
Terminating impedance at connector	500 ohms ± 20 percent
Frequency Range	20 to 3,500 Hz

ADDITIONAL TECHNICAL DATA:

Environmental Limitations:

Altitude, operating	0 to 10,000 feet
Altitude, nonoperating	0 to 50,000 feet
Shock	12 five-foot drops onto concrete surface faced with 1/8 inch asphalt tile, with minimal electrical and physical damage. Height of drop - 6 feet and temperature of -40°F.
Dust	MIL-STD-810, Method 510, Procedure 1
Immersion	MIL-STD-810, Method 512, Procedure 1
Blast	SKN-B-864
Temperature, operating	-40°F to +120°F with solar radiation
Temperature, nonoperating	-65±F to +155°F
Moisture Resistance	MIL-STD-810, Method 507
Vibration	MIL-STD-202, Method 201
Bounce (Loose Cargo)	MIL-STD-810, Method 514, Procedure X1, Part 2
Salt Fog	MIL-STD-810, Test Method 509, Procedure 1
Fungus	MIL-STD-810, Method 508, Procedure 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET

NOMENCLATURE: H-251/U (Cont)

FEDERAL STOCK NO: 5965-043-3460

REFERENCE DATA and LITERATURE

MANUFACTURER CODE	PART NUMBER
80063	H-251/U

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET

NOMENCLATURE: HS-16A

FEDERAL STOCK NO: 5965-160-1055



FUNCTIONAL DESCRIPTION:

Headset HS-16A contains two magnetic earphone receivers mounted in an adjustable, double band steel headband. The headset, for maximum performance, is peaked at 1000 Hz and it is primarily intended for use with Code Practice Equipment Type Number EE-81. However, it is suitable for other code applications.

CONSISTS OF:

1	Electrical Headset	HS-16A
2	Earphone Receiver	Murdock Corp. Type B
1	Headband	HB-1
1	Connecting Cord	CC-338

RELATIONSHIP TO SIMILAR EQUIPMENT:

PHYSICAL DESCRIPTION:

Dimensions: (Earphone)

Depth	1.25 inches (31.75 mm)
Diameter	2.375 inches (60.33 mm)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET

NOMENCLATURE: HS-16A (Cont)

FEDERAL STOCK NO: 5965-160-1055

PHYSICAL DESCRIPTION: (Cont)

Cord Data:

Length	54 inches (1371.60 mm)
Quantity of Conductors	2
Quantity of Connectors	2
Connector Designation	Pin Plugs
Jacket Material	Cotton Braid

ADDITIONAL PHYSICAL DATA:

Headband Data

Material	Steel
Padding	Cloth
Type	Double Band Fixed

TECHNICAL DESCRIPTION: (HEADSET)

INPUT

Quantity of Earphones	2
Nominal Impedances	320 ohms (in series)
Frequency Range	100 to 1,400 Hz

ADDITIONAL TECHNICAL DATA:

Receiver Resonant Frequency	1050 ± 100 cycles per second
Receiver D-C Resistance	56 ohms ± 10%

Environmental Limitations:

Equipment Nonoperating:

Temperature Range	-80° F to +160° F (High temperature extreme not more than 4 hours; low temperature extreme not more than 24 hours at any one time.)
Relative Humidity	Up to 97 percent indefinitely; exposure at 100 percent with condensation for four hours.
Elevation	Up to 25,000 feet above sea level

Equipment Operating:

Temperature Range	-65° F to +150° F (High temperature extreme not more than 4 hours; low extreme not more than 72 hours at any one time)
Relative Humidity	Up to 97 percent indefinitely; 100% with condensation for 4 hours
Elevation	Up to 10,000 feet above sea leval

REFERENCE DATA and LITERATURE

MIL-H-12993
Telephonics Corporation Final Report of Technical Analysis Phase of Standardization Studies and Surveys of Headsets and Headset Microphones
MSS 5965-1

MANUFACTURER CODE	PART NUMBER
80063	HS-16A
76596	HS-16A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET

NOMENCLATURE: NT-49507B

FEDERAL STOCK NO: 5965-285-0745



FUNCTIONAL DESCRIPTION:

This electrical headset contains two magnetic receivers mounted on an adjustable, single band, steel headband. The unit is designed for use under combat helmets and for rugged field conditions. It is salt-spray resistant.

CONSISTS OF:

2 Earphone Receiver NT-49505 (A)
2 Earphone Cushion NT-49506A
1 Headband NT-49504
1 Cord NT-49503B
1 Plug PJ-054B
1 Extension cord (when specified)

RELATIONSHIP TO SIMILAR EQUIPMENT:

PHYSICAL DESCRIPTION:

Dimensions: (Earphone)

Depth	.625 inch(including screw) (15.88 mm)
Diameter	1.9375 inches (49.21 mm)

Cord Data:

Length	9 inches (228.6 mm)
No. of Conductors	2
No. of Connectors	1
Jacket Material	Polychloroprene

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET


NOMENCLATURE: NT-49507B (Cont)

FEDERAL STOCK NO: 5965-285-0745

ADDITIONAL PHYSICAL DATA:

Headband Data:

Material	Steel
Cover	Vinyl
Type	Single Band, Adjustable

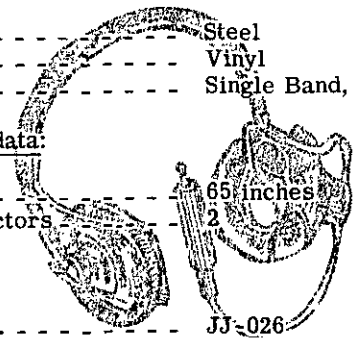

Extension Cord data:

Length	65 inches
No. of Conductors	2

Connector Data:

One jack	JJ-026
One plug	PJ-055B
Jack and plug	Waterproof sheath
Cable	Tinsel insulated class SP of MIL-C-3849

TECHNICAL DESCRIPTION:

INPUT

Quantity of Earphones	2
Nominal Impedance	600 ohms (series)
Frequency Range	300 to 4,000 Hz

ADDITIONAL TECHNICAL DATA:

Environmental Limitations:

Impact	Headset withstands 12 drops from 10 feet to concrete floor
Temperature Range (storage)	-67° F to +149° F

REFERENCE DATA and LITERATURE

MSS 5965-1
Headset MIL-H-3679
Earphone MIL-E-17884
NAVY Drawing, RE51D123, Rev B
Plug PJ-054B, MIL-P-642
Extension Cord, MIL-C-3849
Extension Cord Jack, MIL-J-641
Extension Cord Plug, MIL-P-642

MANUFACTURER CODE	PART NUMBER
78711	20013
82872	---
81812	---


4B5742

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET

NOMENCLATURE: NT-49985A

FEDERAL STOCK NO: 5965-280-3629

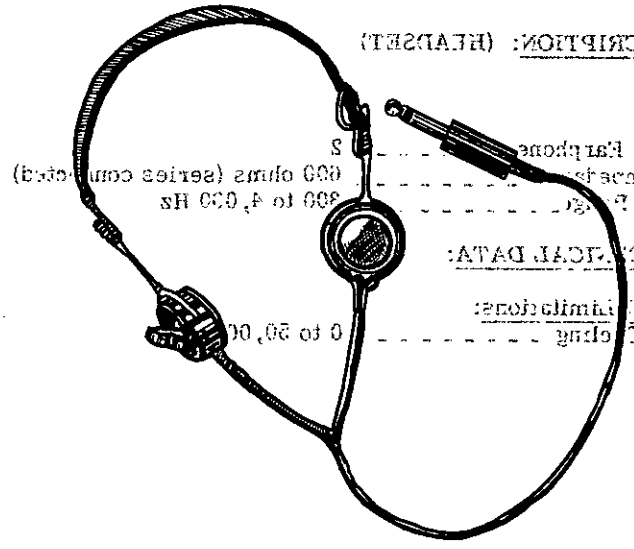

FUNCTIONAL DESCRIPTION:

This headset contains two magnetic earphone receivers mounted on a fixed, double band, metal headband. The headset has a relatively flat response and is suitable for general purpose voice communications. It is also used with Sonic Equipment SPEC-6C (Surface Special Radar).

CONSISTS OF:

2	Earphone Receivers	Type Number 49016
1	Headband	
1	Cord	Type Number 49101

RELATIONSHIP TO SIMILAR EQUIPMENT:

PHYSICAL DESCRIPTION:

Dimensions: (Earphone)

Depth	.750 inch (19.05 mm)
Diameter	1.750 inches (44.45 mm)

Cord Data:

Length	5 feet (1524.00 mm)
Quantity of Conductors	2
Connector Designation	PJ-055B
Jacket Material	Rubber

ADDITIONAL PHYSICAL DATA:

Headband Data:	
Material	Metal
Padding	Leather
Type	Double Band, Fixed

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET

NOMENCLATURE: NT-49985A (Cont)

FEDERAL STOCK NO: 5965-280-3629

TECHNICAL DESCRIPTION: (HEADSET)

INPUT

Quantity of Earphone	2
Nominal Impedance	600 ohms (series connected)
Frequency Range	300 to 4,000 Hz

ADDITIONAL TECHNICAL DATA:

Environmental Limitations:

Pressure Cycling	0 to 50,000 feet

REFERENCE DATA and LITERATURE

MIL-STD-242
MSS 5965-1
Telephonics Corporation Final Report of Technical Analysis Phase of Standardization Studies and Surveys of Headsets and Headset-Microphones


MANUFACTURER CODE	PART NUMBER
80064	NT-49985A

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET

NOMENCLATURE: COMMERCIAL P-104J535-1

FEDERAL STOCK NO: 5965-253-1302

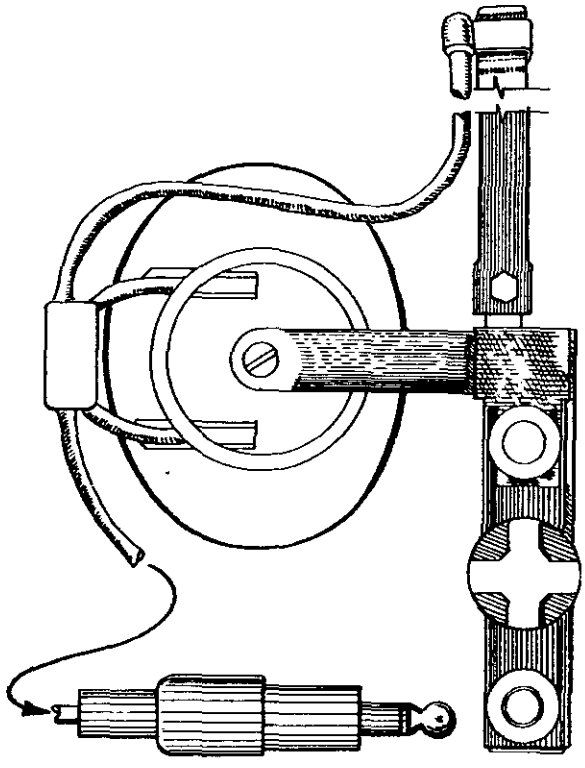

FUNCTIONAL DESCRIPTION:

This electrical headset contains two magnetic type earphone receivers suspended from an adjustable, single band, steel headband. The unit is primarily intended for use with Mine Detector DT-44/PRS-3.

CONSISTS OF:

2	Earphone Receivers	SCL-1249
1	Headband	
1	Clothing Clip	
1	Cord Assembly	
1	Plug	PJ-054B

RELATIONSHIP TO SIMILAR EQUIPMENT:

This item is the same as the H-62/U Headset - Microphone, but it is without the microphone.

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET

NOMENCLATURE: COMMERCIAL P-104J535-1 (Cont)

FEDERAL STOCK NO: 5965-253-1302

PHYSICAL DESCRIPTION:

Dimensions: (Earphone)

Depth	.50 inch (12.70 mm)
Diameter	3 inches vertical (76.20 mm)
	2.50 inches horizontal (63.50 mm)

Cord Data:

Length	5 feet (1524.00 mm)
No. of Conductors	2
No. of Connectors	2
Connector Designation	Solder Lug
Jacket Material	Rubber

ADDITIONAL PHYSICAL DATA:

Headband Data:

Material	Steel
Padding	Plastic
Type	Single

TECHNICAL DESCRIPTION: (HEADSET)

INPUT

Quantity of Earphones	2
Nominal Impedance	600 ohms
Frequency range	Not rated

ADDITIONAL TECHNICAL DATA:

Environmental Limitations:

Pressure Cycling	0 to 50,000 feet

REFERENCE DATA and LITERATURE

Telephonics Corporation Final Report of Technical Analysis Phase of Standardization Studies and Surveys of Headsets and Headset - Microphones. MSS 5965-1

MANUFACTURER CODE	PART NUMBER
24446	P-104J535-1

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET

NOMENCLATURE: COMMERCIAL 159

FEDERAL STOCK NO: 5965-284-8925

No illustration available

FUNCTIONAL DESCRIPTION:

This electrical headset contains two magnetic type earphone receivers mounted on an adjustable, double band, steel headband. The headset is suitable for heavy duty radio service where a peaked response at 1, 000 cycles per second is required.

CONSISTS OF:

2	Earphone Receivers, Trimm Inc. Part Number 160-4
1	Headband

RELATIONSHIP TO SIMILAR EQUIPMENT:

PHYSICAL DESCRIPTION:

Dimensions (Earphone):

Depth	.750 inch (19. 05 mm)
Diameter	2. 125 inches (53. 98 mm)

Cord Data:

Length	5 feet (1524. 00 mm)
Number of Conductors	2
Number of Connectors	1
Connector Designation	Trimm Inc. Part Number 0870
Jacket Material	Cotton Braid

ADDITIONAL PHYSICAL DATA:

Headband Data:

Material	Steel
Padding	Cloth
Type	Double Band, Adjustable

TECHNICAL DESCRIPTION:

INPUT

Quantity of Earphones	2
Nominal Impedance	600 ohms (series connected)
Frequency Range	Peaked at 1, 000 Hz

ADDITIONAL TECHNICAL DATA:

MANUFACTURER CODE	PART NUMBER
81612	159

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET

NOMENCLATURE: COMMERCIAL 159 (Cont)

FEDERAL STOCK NO: 5965-284-8925

ENVIRONMENTAL LIMITATIONS:

Pressure Cycling	0 to 50, 000 feet
Moisture and Fungus	Mositure Resistant and Fungus Proof

REFERENCE DATA and LITERATURE

MSS 5965-1
Telephonics Corporation Final Report of Technical Analysis Phase of Standardization *Studies and Surveys of Headsets and Headset-Microphones.*

MANUFACTURER CODE	PART NUMBER
81812	159

Source: https://assist.dla.mil -- Downloaded: 202640-26T13:37Z
Check the source to verify that this is the currentversion before use.

ITEM NAME: HEADSET

NOMENCLATURE: COMMERCIAL 716D

FEDERAL STOCK NO: 5965-160-2451



FUNCTIONAL DESCRIPTION:

This headset consists of a single magnetic type earphone receiver mounted on a single steel headband. The headset has a relatively flat response and is suitable for general purpose voice applications.

CONSISTS OF:

1 Earphone Receiver Western Electric Type Number 716A
1 Headband

RELATIONSHIP TO SIMILAR EQUIPMENT:

PHYSICAL DESCRIPTION:

Dimensions: (Earphone)

Depth	1.188 inches (30.16 mm)
Diameter	2.422 inches (61.52 mm)

Cord Data:

Length	6 feet (1828.80 mm)
No. of Conductors	2
No. of Connectors	1
Connector Designation	PJ-068
Jacket Material	Cotton Braid

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET

NOMENCLATURE: COMMERCIAL 716D (Cont)

FEDERAL STOCK NO: 5965-160-2451

ADDITIONAL PHYSICAL DATA:

Headband Data:

Material	Steel
Padding	Cardboard
Type	Single Band Fixed

TECHNICAL DESCRIPTION: (HEADSET)


INPUT

Quantity of Earphones	1
Nominal Impedance	130 ohms ± 15 percent
Frequency Range	100 to 2,900 Hz

ADDITIONAL TECHNICAL DATA:

Environmental Limitations:

Pressure Cycling (nonoperating)	0 to 50,000 feet



REFERENCE DATA and LITERATURE

Telephonics Corporation Final Report of Technical Analysis Phase of Standardization Studies and Surveys of Headsets and Headset - Microphones MSS 5965-1


MANUFACTURER CODE	PART NUMBER
64959	716D

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET

NOMENCLATURE: COMMERCIAL 24076

FEDERAL STOCK NO: 5965-256-8687

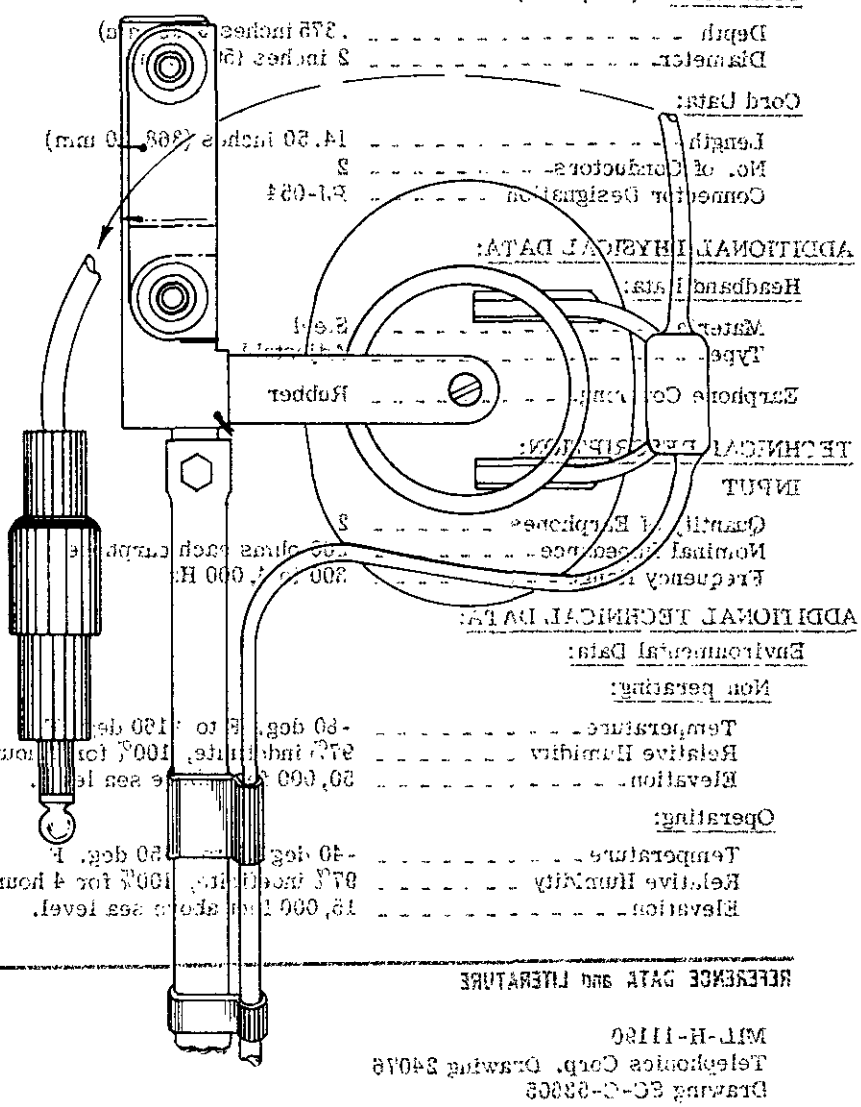

FUNCTIONAL DESCRIPTION:

This unit contains two magnetic type earphone receivers mounted on an adjustable steel headband. This unit is used as a maintenance item for Headset-Microphone H-62/U.

CONSISTS OF:

1	Headset, Electrical	78711

RELATIONSHIP TO SIMILAR EQUIPMENT:

This is a maintenance item for H-62/U Headset-Microphone.

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET

NOMENCLATURE: COMMERCIAL 24076 (Cont)

FEDERAL STOCK NO: 5965-256-8687

PHYSICAL DESCRIPTION:

Dimensions: (Earphone)

Depth	.375 inches (9.53 mm)
Diameter	2 inches (50.8 mm)

Cord Data:

Length	14.50 inches (368.30 mm)
No. of Conductors	2
Connector Designation	PJ-054

ADDITIONAL PHYSICAL DATA:

Headband Data:

Material	Steel
Type	Adjustable
Earphone Covering	Rubber

TECHNICAL DESCRIPTION:

INPUT

Quantity of Earphones	2
Nominal Impedance	300 ohms each earphone
Frequency Range	300 to 4,000 Hz

ADDITIONAL TECHNICAL DATA:

Environmental Data:

Nonoperating:

Temperature	-80 deg. F to +160 deg. F
Relative Humidity	97% indefinite, 100% for 4 hours
Elevation	50,000 feet above sea level.

Operating:

Temperature	-40 deg. F to +150 deg. F
Relative Humidity	97% indefinite, 100% for 4 hours
Elevation	15,000 feet above sea level.

REFERENCE DATA and LITERATURE

MIL-H-11190
Telephonics Corp. Drawing 24076
Drawing SC-C-53605

MANUFACTURER CODE	PART NUMBER
78711	24076

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

SECTION 5

HEADSET - MICROPHONES

Nomenclature, model or part number	Page
H-62/U	5.2.1
H-63/U	5.3.1
H-66/U	5.4.1
H-91A/U	5.5.1
H-101A/U	5.6.1
H-108B/U	5.7.1
H-144C/U	5.8.1
H-157/AIC	5.9.1
H-161C/GR	5.10.1
H-163/U	5.11.1
H-172/U	5.12.1
H-182( )/PT	5.13.1
H-210/G	5.14.1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET, MICROPHONE

NOMENCLATURE: H-62/U

FEDERAL STOCK NO: 5965-237-8048

FUNCTIONAL DESCRIPTION:

Headset-Microphone H-62/U is a combination headset and microphone assembly which contains two magnetic earphone receivers suspended from an adjustable steel headband and a carbon type boom microphone mounted on the right side of the headband. The headset is suitable for most general purpose radio telephone applications related to ground communications equipment.

CONSISTS OF:

2	Earphone Receivers	HT-49505
1	Carbon Microphone	M-51/UR
1	Plug	P1-054
1	Plug	P1-292

RELATIONSHIP TO SIMILAR EQUIPMENT:

PHYSICAL DESCRIPTION:

Microphone Cord Data:

Length - - - - - - - - - - - - - - - -
Quantity of Conductors - - - - - -
Quantity of Connectors - - - - - -
Connector Designation - - - - - - - J-292

Headset Cord Data:

Length - - - - - - - - - - - - - - - - 4 feet (406, 40 mm)
Quantity of Conductors - - - - - - 2
Quantity of Connectors - - - - - - 1
Connector Designation - - - - - - - J-292


ADDITIONAL PHYSICAL DATA:

Headset Data:

Material - - - - - - - - - - - - - - - - Steel
Padding - - - - - - - - - - - - - - - - Sponge rubber
Type - - - - - - - - - - - - - - - - - - Single ear

Mounting and Suspension Data:

Earpiece - - - - - - - - - - - - - - - Suspended on headband
Microphone - - - - - - - - - - - - - - Mounted on adapter fastened to right side of headband

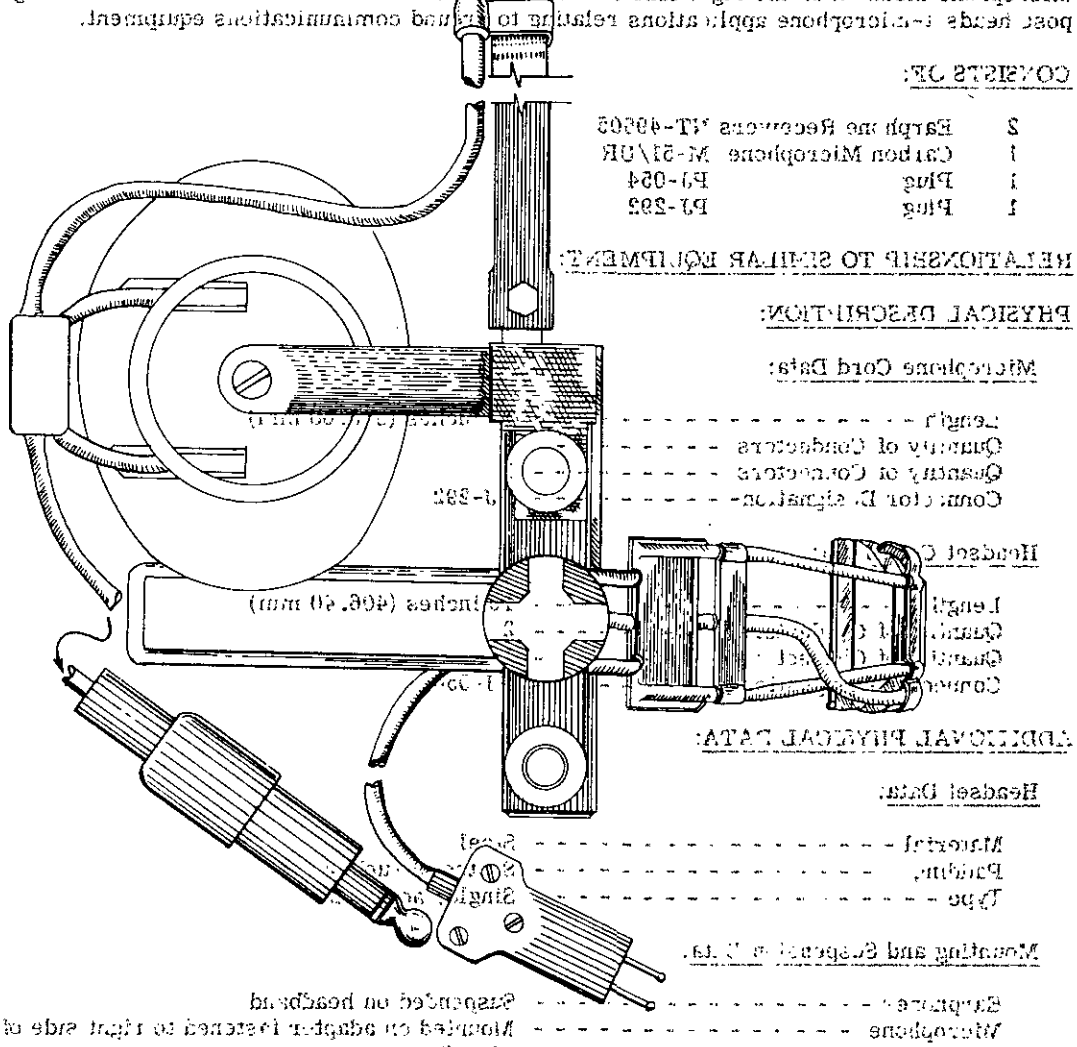

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET - MICROPHONE

NOMENCLATURE: H-62/U (Cont)

FEDERAL STOCK NO: 5965-237-8048

FUNCTIONAL DESCRIPTION:

Headset-Microphone H-62/U is a combination headset and microphone assembly which contains two magnetic earphone receivers suspended from an adjustable steel headband and a carbon type boom microphone mounted on the right side of the headband. The headset is suitable for most general purpose headset-microphone applications relating to ground communications equipment.

CONSISTS OF:

2	Earphone Receivers	NT-49505
1	Carbon Microphone	M-51/UR
1	Plug	PJ-054
1	Plug	PJ-292

RELATIONSHIP TO SIMILAR EQUIPMENT:

PHYSICAL DESCRIPTION:

Microphone Cord Data:

Length	14 inches (355.60 mm)
Quantity of Conductors	2
Quantity of Connectors	1
Connector Designation	PJ-292

Headset Cord Data:

Length	16 inches (406.40 mm)
Quantity of Conductors	2
Quantity of Connectors	1
Connector Designation	PJ-054

ADDITIONAL PHYSICAL DATA:

Headset Data:

Material	Steel
Padding	Synthetic rubber
Type	Single, adjustable

Mounting and Suspension Data:

Earphones	Suspended on headband
Microphone	Mounted on adapter fastened to right side of headband

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET - MICROPHONE

NOMENCLATURE: H-62/U (Cont)

FEDERAL STOCK NO: 5965-237-8048

TECHNICAL DESCRIPTION: (HEADSET)

INPUT

Quantity of Earphones	2
Nominal Impedance	600 ohms
Frequency Range	300 to 4,000 Hz

TECHNICAL DESCRIPTION: (MICROPHONE)

INPUT

Operating Current	50 milliamperes

OUTPUT

Nominal Impedance	100 ohms
Frequency Range	300 to 4,000 Hz

ADDITIONAL TECHNICAL DATA:

Headset-Microphone Environmental Limitations:

Equipment Nonoperating:

Temperature Range	-80° F to +160° F (High temperature extreme not more than 4 hours, and low temperature extreme not more than 24 hours at any one time.)
Relative Humidity	Up to 97 percent for indefinite period
	Exposure at 100 percent with condensation for four hours
Elevation	Up to 50,000 feet above sea level
Orientation	Indefinite storage in any orientation
Salt spray	Withstands 20 percent salt spray test, method 101, condition A, MIL-STD-202
Vibration	Withstands vibration test of MIL-H-11190
Bounce	Withstands bounce test of MIL-H-11190
Shock	Withstands 3-foot drops on each corner edge and face onto a 2 inch fir floor backed by concrete or rigid steel frame
Blast	Withstands gunblast test of MIL-STD-108 (degree 2)

Source: https://assist.dla.mil -- Downloaded: 202640-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET - MICROPHONE

NOMENCLATURE: H-62/U (Cont)

FEDERAL STOCK NO: 5965-237-8048

Equipment Operating:

Temperature Range	-40° F to +150° F (High temperature extreme not more than 4 hours and low temperature extreme not more than 72 hours.)
Relative Humidity	Up to 97 percent indefinitely; 100 percent with condensation 4 hours
Elevation	Up to 15, 000 feet above sea level

REFERENCE DATA and LITERATURE

MIL-E-17884 - Earphone
MIL-H-11190 - Headset
MIL-M-5794 - Microphone
Telephones Corporation Drawing Number 20016
MSS 5965-1
Pricing Guide for Signal Corps Equipment SIG5-5


MANUFACTURER CODE	PART NUMBER
80058 78711	H-62/U TC-209

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET - MICROPHONE

NOMENCLATURE: H-63/U

FEDERAL STOCK NO: 5965-237-8049

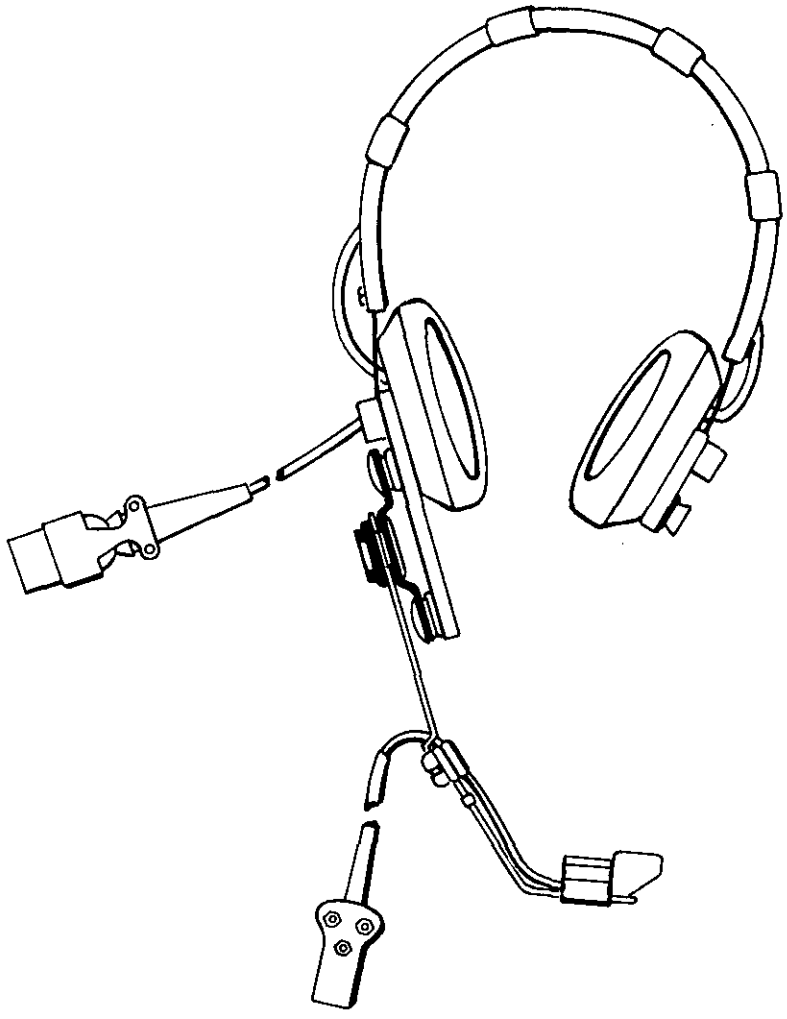

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET - MICROPHONE

NOMENCLATURE: H-63/U (Cont)

FEDERAL STOCK NO: 5965-237-8049

FUNCTIONAL DESCRIPTION:

Headset-Microphone H-63/U is a combination headset and microphone assembly which contains two magnetic earphone receivers suspended on a fixed steel headband, and a carbon type boom microphone mounted on the right side of the headband. The headset is intended primarily for use with Ground Radio Communications Equipment AN/MRG-20 and as a receiver for other radio and wire equipment.

CONSISTS OF:

2	Earphone Receivers Roanwell Part Number 9869
1	Microphone Unit M-51/UR
1	Headband
1	Cord Assembly

RELATIONSHIP TO SIMILAR EQUIPMENT:

PHYSICAL DESCRIPTION:

Microphone Cord Data:

Length	14 inches (355.60 mm)
No. of Conductors	2
No. of Connectors	1
Connector Designation	JJ-055

Headset Cord Data:

Length	16 inches (406.40 mm)
No. of Conductors	2
No. of Connectors	1
Connector Designation	Lionel Corporation part number 7511-18

ADDITIONAL PHYSICAL DATA:

Headband Data:

Material	Steel
Padding	Rubber
Type	Single band, fixed

Mounting and Suspension Data:

Earphones	Suspended on headband
Microphone	Mounted on adapter fastened to right side of headband

TECHNICAL DESCRIPTION: (HEADSET)

INPUT

Quantity of Earphones	2
Nominal Impedance	600 ohms
Frequency Range	300 to 4,000 Hz

TECHNICAL DESCRIPTION: (MICROPHONE)

INPUT

Operating Current	50 milliamperes

OUTPUT

Nominal Impedance	100 ohms
Frequency Range	300 to 4,000 Hz

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET - MICROPHONE

NOMENCLATURE: H-63/U (Cont)

FEDERAL STOCK NO: 5965-237-8049

ADDITIONAL TECHANICAL DATA:

Headset-Microphone Environmental Limitations:

Equipment Nonoperating

Temperature Range	-80° F to +160° F (High temperature extreme not more than 4 hours, and low temperature extreme not more than 24 hours at any one time.)
Relative Humidity	Up to 97 percent for indefinite period. Exposure at 100 percent with condensation for 4 hours.
Elevation	Up to 50,000 feet above sea level
Orientation	Indefinite storage in any orientation
Salt Spray	Withstands 20 percent salt spray test, method 101, condition A, MIL-STD-202
Vibration	Withstands vibration test of MIL-H-11190
Bounce	Withstands bounce test of MIL-H-11190
Shock	Withstands 3 foot drops on each corner edge and face onto a 2-inch fir floor backed by concrete or rigid steel frame
Blast	Withstands gunblast test of standard MIL-STD-108 degree 2

Equipment Operating:

Temperature Range	-40° F to +150° F (High temperature extreme not more than 4 hours and low extreme not more than 72 hours)
Relative Humidity	Up to 97 percent indefinitely; 100 percent with condensation for 4 hours
Elevation	Up to 15,000 feet above sea level

REFERENCE DATA and LITERATURE

MIL-H-11190 for Headset
MIL-M-5794 for Microphone
MSS 5965-1
Telephonics Corporation Final Report of Technical Analysis Phase of Standardization Studies and Surveys of Headsets and Headset-Microphones Pricing Guide for Signal Corps Equipment Sig 5-5


MANUFACTURER CODE	PART NUMBER
80058	H-63/U

Source: https://assist.dla.mil -- Downloaded: 202640-26T13:37Z
Check the source to verify that this is the currentversion before use.

ITEM NAME: HEADSET - MICROPHONE

NOMENCLATURE: H-66/U

FEDERAL STOCK NO: 5965-221-0999

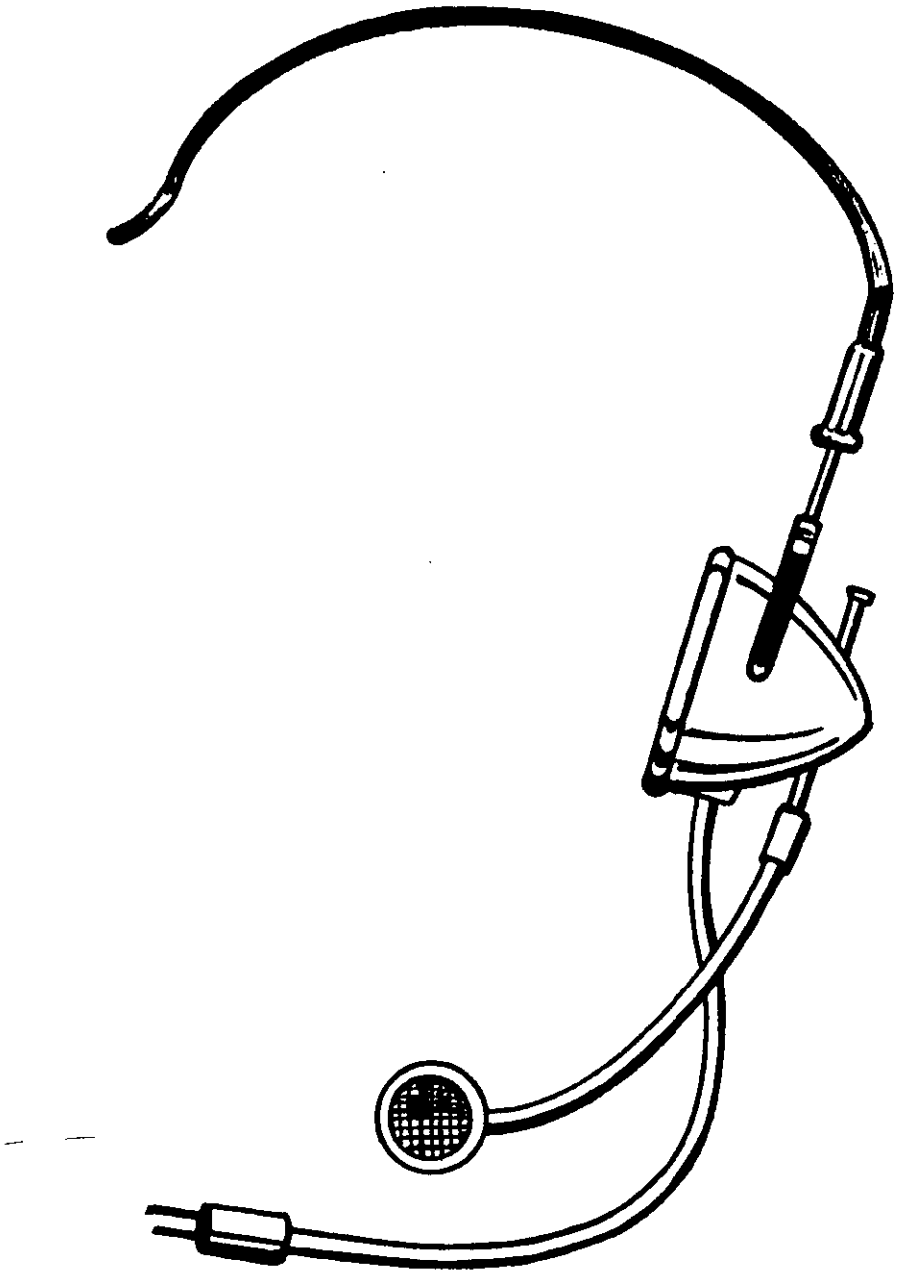

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET - MICROPHONE

NOMENCLATURE: H-66/U (Cont)

FEDERAL STOCK NO: 5965-221-0999

FUNCTIONAL DESCRIPTION:

Headset-Microphone H-66/U is a combination headset and carbon type microphone assembly which contains one magnetic earphone receiver suspended on a steel headband, and a carbon type boom microphone mounted on the right side of the headband. The headset is a telephone operator's headset.

CONSISTS OF:

1	Earphone Receiver (including cushion)
1	Microphone Unit
1	Headband
1	Switch
1	Cord Assembly

RELATIONSHIP TO SIMILAR EQUIPMENT:

PHYSICAL DESCRIPTION:

Headset Cord Data:

Length	60 inches (1524 mm)
No. of Conductors	2
No. of Connectors	None
Plug	W.E. Co. type No. 289B cotton braid-water repellent type.

ADDITIONAL PHYSICAL DATA:

Headband Data:

Material	Steel

Mounting and Suspension Data:

Earphones	Suspended on headband
Microphone	Mounted on adapter fastened to right side of headband

TECHNICAL DESCRIPTION: (HEADSET)

INPUT

Quantity of Earphone	1
Nominal Impedance	300 ohms
Frequency Range	Not rated

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET - MICROPHONE

NOMENCLATURE: H-66/U (Cont)

FEDERAL STOCK NO: 5965-221-0999

TECHNICAL DESCRIPTION: (MICROPHONE)

OUTPUT

Nominal impedance - - - - - - - - - - - - - 40 ohms
Frequency range- - - - - - - - - - - - - - 200 to 3,000 Hz

ADDITIONAL TECHNICAL DATA:

REFERENCE DATA and LITERATURE
MSS 5965-1A


MANUFACTURER CODE	PART NUMBER
80058	H-66/U

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET - MICROPHONE

NOMENCLATURE: H-91A/U

FEDERAL STOCK NO: 5965-669-6871

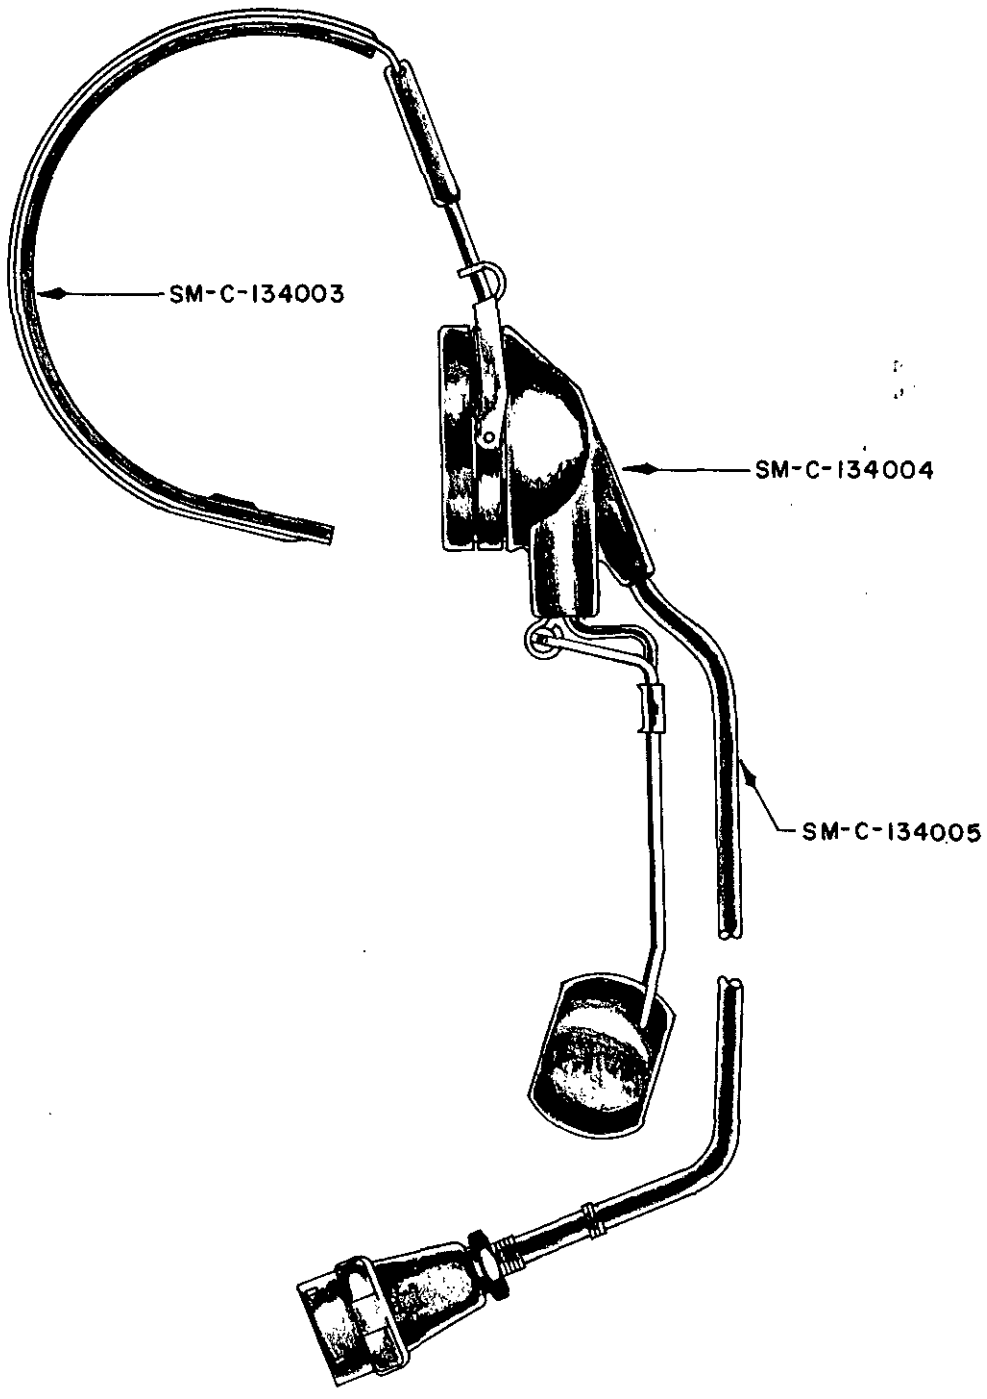

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET - MICROPHONE

NOMENCLATURE: H-91A/U (Cont)

FEDERAL STOCK NO: 5965-669-6871

FUNCTIONAL DESCRIPTION:

The Headset-Microphone is a battery powered magnetic type and is suitable for field or tactical use. The item may be used as a handset when the headband is removed. The H-91A/U is the same as the H-144C/U, except the H-91A/U does not have a switch.

CONSISTS OF:

1	Earphones, Magnetic
1	Earphone Shell, Hard Surface
1	Headband, Single
1	Cord
1	Microphone Bracket
1	Microphone, Carbon Type
1	Cord Assembly
1	Connector

RELATIONSHIP TO SIMILAR EQUIPMENT:

Similar to H-92( )/U and H-144( )/U. The H-91A/U replaces H-91/U (plain model). The H-91A/U is P/O SB-86( )/U, AN/TIC-7( ), and AN/MTC-3( ).

PHYSICAL DESCRIPTION:

Earphone Dimensions - - - - - - - - - - - - Not available

Microphone Dimensions - - - - - - - - - - - Not available

CORD DATA:

Length - 5 feet (1,524 mm)

ADDITIONAL PHYSICAL DATA:

Connector Data:

Connector Type - - - - - - - - - - - - - - *Telephone plug*
Connector Designation- - - - - - - - - - - - U-161/U

Headband Data:

Type - Single band
Construction - - - - - - - - - - - - - - - - - Extruded plastic web between two headband wires

Mounting and Suspension Data:

Microphone - - - - - - - - - - - - - - - - - Mounted on bracket which fits either earcup and locks when bracket thumbscrew is tightened.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET - MICROPHONE

NOMENCLATURE: H-91A/U (Cont)

FEDERAL STOCK NO: 5965-669-6871

TECHNICAL DESCRIPTION: (MICROPHONE)

INPUT

Operating Current - - - - - - - - - - - - - - 85 mA

OUTPUT

Nominal Impedance - - - - - - - - - - - - - 25 ohms
Frequency Range - - - - - - - - - - - - - - 300 to 4,000 Hz

TECHNICAL DESCRIPTION: (EARPHONE)

INPUT

Quantity of Earphones - - - - - - - - - - - - 1
Nominal Impedance - - - - - - - - - - - - - 275 ohms
Frequency Range - - - - - - - - - - - - - - 300 to 4,000 Hz

ADDITIONAL TECHNICAL DATA:

ENVIRONMENTAL LIMITATIONS:

Relative Humidity - - - - - - - - - - - - - - - 100 percent
Temperature, Nonoperating - - - - - - - - - - -80° to +160° F
Temperature, Operating - - - - - - - - - - - - -40° to +131° F
Altitude, Nonoperating - - - - - - - - - - - - 50,000 feet
Altitude, Operating - - - - - - - - - - - - - - Up to 10,000 feet

REFERENCE DATA and LITERATURE

MIL-H-12576

SC-DL-134001-J

MANUFACTURER CODE	PART NUMBER
80058	H-91A/U

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET - MICROPHONE

NOMENCLATURE: H-101A/U

FEDERAL STOCK NO: 5965-627-8382

(NOT RECOMMENDED FOR NEW EQUIPMENT)



5.6.1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET - MICROPHONE

NOMENCLATURE: H-101A/U

FEDERAL STOCK NO: 5965-627-8382

FUNCTIONAL DESCRIPTION:

This unit has two dynamic earphones and a dynamic noise canceling microphone. The Headset-Microphone is used in aircraft communication below 14,000 feet.

CONSISTS OF:

2	Earphones - H-143/AIC (MIL-E-25670)
2	Earphone Cushions - MX2088/U
1	Headband
2	Cord Assemblies - CX-2555/U
1	Microphone Bracket - M-33A/AIC
1	Microphone - M-33A/AIC
1	Cord Assembly - CX-2556/U
4	Connectors - U93A/U, JJ-055, U-173/U

RELATIONSHIP TO SIMILAR EQUIPMENT:

Headset-Microphone is used with AN/ARC 131. H-157/U is the preferred item by the Air Force.

PHYSICAL DESCRIPTION:

Earphone Dimensions:

Nominal Diameter of Element	1 inch (25.4 mm)
Depth of Element	0.45 inch (11.43 mm)
Microphone Dimensions	Not available

CORD DATA, HEADSET:

Lengths	24 inches long cord from U-93A/U to junction. 1 inch long cord from JJ-055 to junction.

CORD DATA, MICROPHONE:

Length	12 inches long from first U-173/U to second U-173/U.

ADDITIONAL PHYSICAL DATA:

Connector Data:

Connector Types	Telephone plugs and jack
Connector Designations	U-93A/U, JJ-055 modified, and U-173/U.

Headband Data:

Type	Double band
Construction	Covered mesh cloth

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET - MICROPHONE

NOMENCLATURE: H-101A/U (Cont)

FEDERAL STOCK NO: 5965-627-8382

ADDITIONAL PHYSICAL DATA: (Cont)

Mounting and Suspension Data:

Microphone	Suspended on adjustable wire loop which mounts to swivel bracket of headset.
Earphones	Suspended on adjustable headband.

TECHNICAL DESCRIPTION: (MICROPHONE)

INPUT

Operating Current	Not applicable

OUTPUT

Nominal Impedance	2 ohms
Frequency Range	100 to 5,000 Hz

TECHNICAL DESCRIPTION: (EARPHONE)

INPUT

Quantity of Earphones	2
Nominal Impedance	9.5 ohms (in parallel)
Frequency Range	200 to 6,000 Hz

ADDITIONAL TECHNICAL DATA:

ENVIRONMENTAL LIMITATIONS:

Altitude	Up to 14,000 feet

REFERENCE DATA and LITERATURE

SC-DL-176556	MIL-T-9177
SM-C-19365	MIL-J-641
SM-D-176673	MIL-H-9234


MANUFACTURER CODE	PART NUMBER
80063 82872	H-101A/U 10207

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET - MICROPHONE

NOMENCLATURE: H-108B/U

FEDERAL STOCK NO: 5965-583-4865

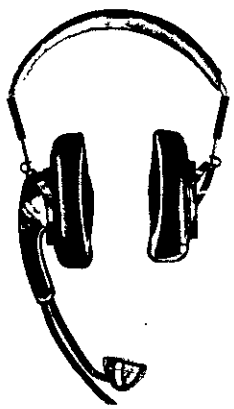

FUNCTIONAL DESCRIPTION:

Headset-Microphone H-108B/U provides communication and monitoring facilities for an operator's use at switchboards, desks, and PBX (Private Branch Exchange) positions. It is a part of Telephone Central Officer Group, Manual AN/GTA-6( ) and various other telephone equipments. Cord CX-1245( )/U or Cord CX-4396( )/U is required for use with Headset-Microphone H-108B/U but is not supplied as part of the equipment.

CONSISTS OF:

1 Headset-Microphone H-108B/U

RELATIONSHIP TO SIMILAR EQUIPMENT:

PHYSICAL DESCRIPTION:

Dimensions: (Receiver Element)

Diameter	1.64 inches (41.66 mm)
Thickness	0.72 inch (18.29 mm)

Dimensions: (Microphone Element)

Diameter	1.28 inches (35.51 mm)
Thickness	0.41 inch (10.41 mm)

Headband Data:

Type	Single band, adjustable
Material	Stainless steel
Padding	Vinylite

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET - MICROPHONE

NOMENCLATURE: H-108B/U (Cont)

FEDERAL STOCK NO: 5965-583-4865

MOUNTING AND SUSPENSION DATA:

Earphone	Mounted on bracket attached to headband.
Microphone	Mounted in a plastic case at one end of a square aluminum boom which is attached at the other end to the earphone housing.

CORD DATA:

Length	32-1/2 inches (81.28 mm)
Type	Tinsel
Jacket Material	Rubber
Number of Conductors	3
Connector Type	Polarized plug

MECHANICAL DESCRIPTION: (HEADSET)

INPUT

Quantity of Earphones	1
Nominal Impedance	300 ohms at 1,000 cycles
Frequency Range	300 to 3,000 Hz

TECHNICAL DESCRIPTION: (MICROPHONE)

INPUT

Operating Current	60 milliamperes

OUTPUT

Nominal Impedance	25 ohms
Frequency Range	300 to 4,000 Hz

ADDITIONAL TECHNICAL DATA:

Resistance Properties: The H-108B/U resists the effects of sand and dust, fungus, and salt spray.

Temperature:

Operating	-54°C to +52° C
Nonoperating	-62° C to +71° C

Power Supply: The equipment is designed to be operated from a 24 ±4 volt dc power source.

Source: https://assist.dla.mil -- Downloaded: 202640-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET - MICROPHONE

NOMENCLATURE: H-108B/U

FEDERAL STOCK NO: 5965-583-4865

REFERENCE DATA and LITERATURE

MIL-H-26827

MIL-E-5272

MANUFACTURER CODE	PART NUMBER
80058	H-108B/U
82872	10336

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET - MICROPHONE

NOMENCLATURE: H-144C/U

FEDERAL STOCK NO: 5965-682-2769

NO ILLUSTRATION AVAILABLE
NOT RECOMMENDED FOR NEW EQUIPMENT

FUNCTIONAL DESCRIPTION:

The headset-Microphone is battery powered. It may be used as a handset when the headband is removed. The earphone is suspended on the headband. The microphone is mounted to end of folding boom attached to receiver housing.

CONSISTS OF:

1	Earphones
1	Earphone Shell
1	Headband
1	Cord, Headset to Switch
1	Microphone Bracket
1	Microphone, Carbon Type
1	Cord, Switch to Plug
1	Connector, U-161/U
1	Switch, Push to Talk or Lock to Talk

RELATIONSHIP TO SIMILAR EQUIPMENT:

Similar to headset H-91( )/U and H-92( )/U. Used with telephone set TA-312/PT. This is being replaced by the H-182( )/PT.

PHYSICAL DESCRIPTION:

Earphone Dimensions	Not available
Microphone Dimensions	Not available

CORD DATA: (HEADSET TO SWITCH)

Length	35 inches (approx) (889 mm)
Jacket Material	Rubber
No. of Conductors	4

CORD DATA:

Length	36 inches (914.4 mm) approx.
Jacket Material	Rubber
No. of Conductors	7

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET - MICROPHONE

NOMENCLATURE: H-144C/U (Cont)

FEDERAL STOCK NO: 5965-682-2769

ADDITIONAL PHYSICAL DATA:

Connector Data:

Connector Type	*Telephone plug*
Connector Designation	U-161/U

Headband Data:

Type	Adjustable and detachable. Folds for storage.

Mounting and Suspension Data:

Microphone	Mounted to end of folding boom attached to receiver housing

TECHNICAL DESCRIPTION: (MICROPHONE)

INPUT

Operating Current	*60 to 85 mA*

OUTPUT

Nominal Impedance	25 ohms
Frequency Range	300 to 4,000 Hz

TECHNICAL DESCRIPTION: (EARPHONE)

INPUT

Quantity of Earphones	1
Nominal Impedance	275 ohms
Frequency Range	300 to 4,000 Hz

ADDITIONAL TECHNICAL DATA: May be used as a handset with headband removed.

ENVIRONMENTAL LIMITATIONS:

REFERENCE DATA and LITERATURE

MIL-H-12576
SC-DL-95540


MANUFACTURER CODE	PART NUMBER
80058 05062	H-144C/U 1308

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET - MICROPHONE

NOMENCLATURE: H-157/AIC

FEDERAL STOCK NO: 5965-755-4656

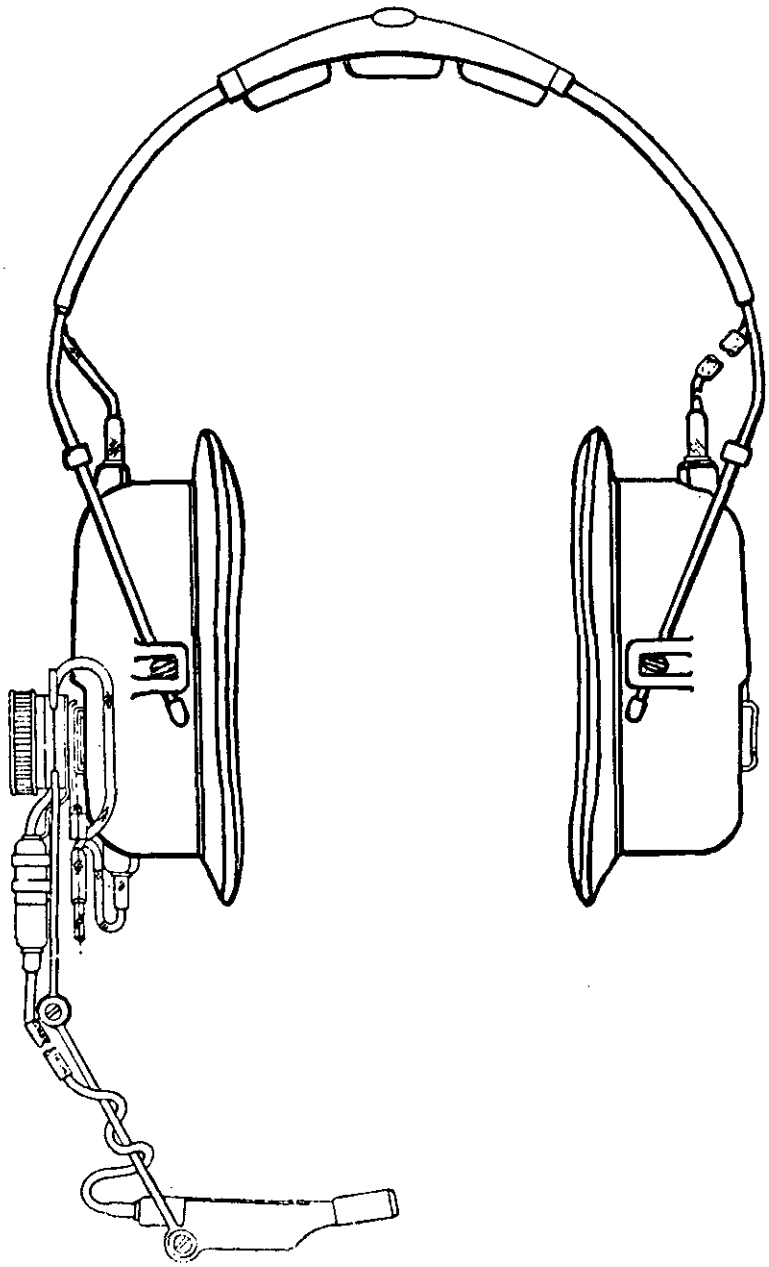

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET - MICROPHONE

NOMENCLATURE: H-157/AIC (Cont)

FEDERAL STOCK NO: 5965-755-4656

FUNCTIONAL DESCRIPTION:

The H-157/AIC headset-microphone is used as part of Intercommunications Set AN/AIC-10( ) at low altitudes to provide high-intelligibility communication under the extreme noise conditions encountered in military aircraft and to provide maximum comfort and minimum fatigue compatible with optimum intelligibility.

CONSISTS OF:

2	Earphones	H-143/AIC
2	Earphone Shells	MX-2508/AIC and MX-3473/AIC
1	Headband	MX-2506/AIC
2	Cord Assemblies	CX-4434/U and CX-4435/U
1	Microphone Bracket	MT-2007/AIC
1	Microphone	M-87/AIC
1	Cord Assembly	CX-4434/U
1	Connector	U-174/U

RELATIONSHIP TO SIMILAR EQUIPMENT:

Similar to headset H-158/AIC except for the microphone.

PHYSICAL DESCRIPTION:

Earphone Dimensions:

Nominal diameter	2 inches (50.8 mm)
Depth	0.45 inches (11.43 mm)
Microphone Dimensions	Not available

CORD DATA: (CX-4434/AIC)

Length	1 foot 4 inches (406.4 mm)
Jacket Material	Nylon braid

CORD DATA: (CX-4435/AIC)

Length	2 feet 4-1/2 inches (723.9 mm)
Jacket Material	Nylon braid

ADDITIONAL PHYSICAL DATA:

Connector Data:

Connector Type	Telephone plug
Connector Designation	U-174/U

Headband Data:

Type	Single band
Construction	Extruded plastic web between two headband wires

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET - MICROPHONE

NOMENCLATURE: H-157/AIC (Cont)

FEDERAL STOCK NO: 5965-755-4656

ADDITIONAL PHYSICAL DATA: (Cont)

Mounting and Suspension Data:

Microphone - - - - - - - - - - - - - - - - - Mounted on bracket which fits either earcup and locks when bracket thumbscrew is tightened.

TECHNICAL DESCRIPTION: (MICROPHONE)

INPUT

Operating Current - - - - - - - - - - - - - Not applicable

OUTPUT

Nominal Impedance - - - - - - - - - - - - 3.5 ohms
Frequency Range - - - - - - - - - - - - - 200 to 5,000 Hz

TECHNICAL DESCRIPTION: (EARPHONE)

INPUT

Quantity of Earphones - - - - - - - - - - - 2
Nominal Impedance - - - - - - - - - - - - 10 ohms (in parallel)
Frequency Range - - - - - - - - - - - - - 100 to 5,500 Hz

ADDITIONAL TECHNICAL DATA:

ENVIRONMENTAL LIMITATIONS:

Temperature - - - - - - - - - - - - - - - - - -55° C to +85° C
Altitude - Up to 35,000 feet

REFERENCE DATA and LITERATURE

MIL-H-26312
MIL-H-26541
MIL-M-26542


MANUFACTURER CODE	PART NUMBER
80058 82872	H-157/AIC 10057

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET - MICROPHONE

NOMENCLATURE: H-161C/GR

FEDERAL STOCK NO: 5965-082-4037

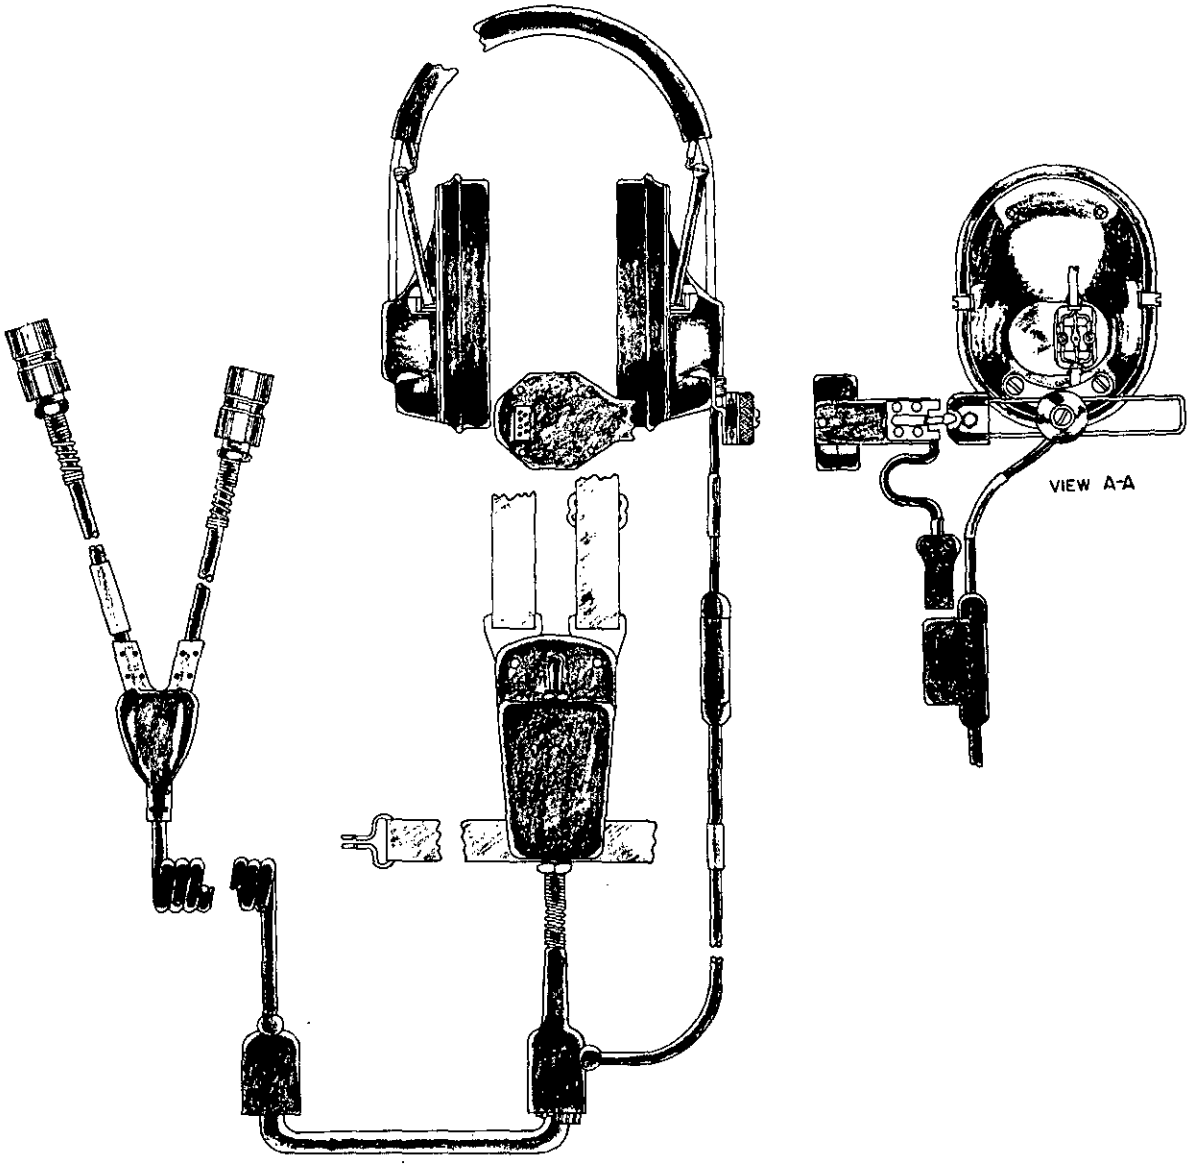

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET - MICROPHONE

NOMENCLATURE: H-161C/GR (Cont)

FEDERAL STOCK NO: 5965-082-4037

FUNCTIONAL DESCRIPTION:

The item is a headset-microphone with a switch chest-plate. It provides facilities for transmission and reception of voice-frequency speech signals. It can be used with portable and vehicular radio sets where background noise is medium to high. It can be worn under the M1 infantry helmet, and is used where free hand operation is required.

CONSISTS OF:

2	Earphones, Dynamic Type, H-269/G
2	Cords, Connector to Bailout
1	Microphone, Dynamic Type, M-138/U
1	Cord, Retractile
1	Connector, Bailout Plug
1	Switch, Push to Talk, Lock on for Interphone, and Hold Position for Radio Operation

RELATIONSHIP TO SIMILAR EQUIPMENT:

Handset H-138( )/GR
Headset, electrical H-139( )/GR
Headset, electrical H-140( )/GR
Headset-chestset, electrical H-141( )/GR
Headset-microphone H-161( )/GR
Handset H-207( )/VRC
Headset, electrical H-227( )/U
Microphone, dynamic M-80( )/GR
Microphone, dynamic M-81( )/GR
Modification kit, electronic equipment MK-567/G
Headset-microphone kit MK-525( )/G
Headset-microphone kit MK-526( )/G

This equipment is used as audio accessories for radio set AN/VRC-12.

PHYSICAL DESCRIPTION:

Earphone Dimensions- - - - - - - - - - - - - Not available
Microphone Dimensions - - - - - - - - - - - Not available

CORD DATA: (CONNECTOR TO BAILOUT)

Length- 18 inches (457.2 mm)

CORD DATA: (RETRACTILE, BAILOUT PLUG TO JUNCTION)

Length (Retracted) - - - - - - - - - - - - - - 12 inches (304.8 mm)
Length (Extended)- - - - - - - - - - - - - - - 6.5 feet (1, 981.2 mm)

ADDITIONAL PHYSICAL DATA:

Connector Data:

Connector Type- - - - - - - - - - - - - - - TBS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET - MICROPHONE

NOMENCLATURE: H-161/GR (Cont)

FEDERAL STOCK NO: 5965-082-4037

ADDITIONAL PHYSICAL DATA: (Cont)

Mounting and Suspension Data:

Microphone - - - - - - - - - - - - - - - - - - Mounted on adapter fastened to left side of headband
Earphone - - - - - - - - - - - - - - - - - - - Suspended on headband

TECHNICAL DESCRIPTION: (MICROPHONE)

INPUT

Operating Current - - - - - - - - - - - - - Not applicable

OUTPUT

Nominal Impedance - - - - - - - - - - - - - 150 ohms (with transformer)
Frequency Range - - - - - - - - - - - - - - 300 to 3,500 Hz

TECHNICAL DESCRIPTION: (EARPHONE)

INPUT

Quantity of Earphones - - - - - - - - - - - 2
Nominal Impedance - - - - - - - - - - - - - 1,000 ohms
Frequency Range - - - - - - - - - - - - - - Not available

ADDITIONAL TECHNICAL DATA:

ENVIRONMENTAL LIMITATIONS:

REFERENCE DATA and LITERATURE

SC-DL-436100
MIL-E-55119
DL-640182
DL-SM-B-317820


MANUFACTURER CODE	PART NUMBER
80058	H-161/GR

Source: https://assist.dla.mil -- Downloaded: 202640-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET - MICROPHONE

NOMENCLATURE: H-163/U

FEDERAL STOCK NO: 5965-670-2931

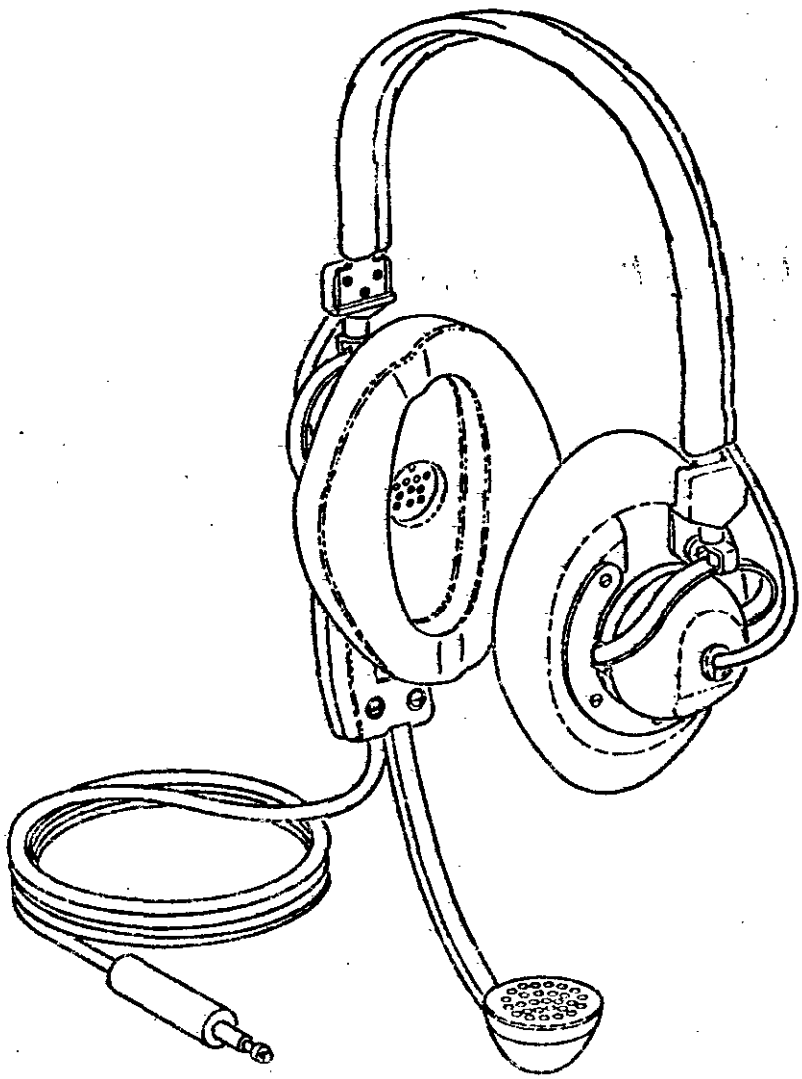

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET - MICROPHONE

NOMENCLATURE: H-163/U

FEDERAL STOCK NO: 5965-670-2931

FUNCTIONAL DESCRIPTION:

The H-163/U is a headset-microphone intended for use in good communications.

CONSISTS OF:

2	Receiver Assemblies	FSN 5965-296-4044
1	Microphone Assembly	FSN 5965-296-9456
1	Headband Assembly	
1	Cord	
1	Connector	PJ-068

PHYSICAL DESCRIPTION:

Earphone and Microphone Dimensions: Not available

Connector Data:

Connector Type	Telephone plug
Connector Designation	PJ-068

Cord Data:

Length	5 feet (1,524.0 mm)
Number of Conductors	3
Type	Tinsel

ADDITIONAL PHYSICAL DATA:

Suspension Data:

Earphones mounted in housings suspended from headband.

Microphone mounted in housing on square boom anchored inside left earphone housing.

HEADBAND TYPE:

Single band covered with a material providing a maximum degree of traction.

TECHNICAL DESCRIPTION: (HEADSET)

INPUT

Quantity of Earphones	2
Nominal Impedance	300 ohms
Frequency Range	300 to 2,600 Hz

TECHNICAL DESCRIPTION: (MICROPHONE)

INPUT

Operating Current	75 mA

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET - MICROPHONE

NOMENCLATURE: H-163/U (Cont)

FEDERAL STOCK NO: 5965-670-2931

TECHNICAL DESCRIPTION: (MICROPHONE) (Cont)

OUTPUT

Nominal Impedance - - - - - - - - - - - - - 20 ohms
Frequency Range- - - - - - - - - - - - - - - 300 to 2,600 Hz

ADDITIONAL TECHNICAL DATA:

Earphone Type - - - - - - - - - - - - - - - - - Magnetic
Microphone Type - - - - - - - - - - - - - - - Carbon
Power Requirement - - - - - - - - - - - - - 24 ±4 volts, dc

ENVIRONMENTAL LIMITATIONS:

Temperature - - - - - - - - - - - - - - - - - - Up to 70° C
Altitude (Transportation)- - - - - - - - - - - Up to 40,000 feet

REFERENCE DATA and LITERATURE

MIL-H-9697


MANUFACTURER CODE	PART NUMBER
82872 88243 80058	11046 226 H-163/U

Source: https://assist.dla.mil -- Downloaded: 202640-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET - MICROPHONE

NOMENCLATURE: H-172/U

FEDERAL STOCK NO: 5965-715-4031

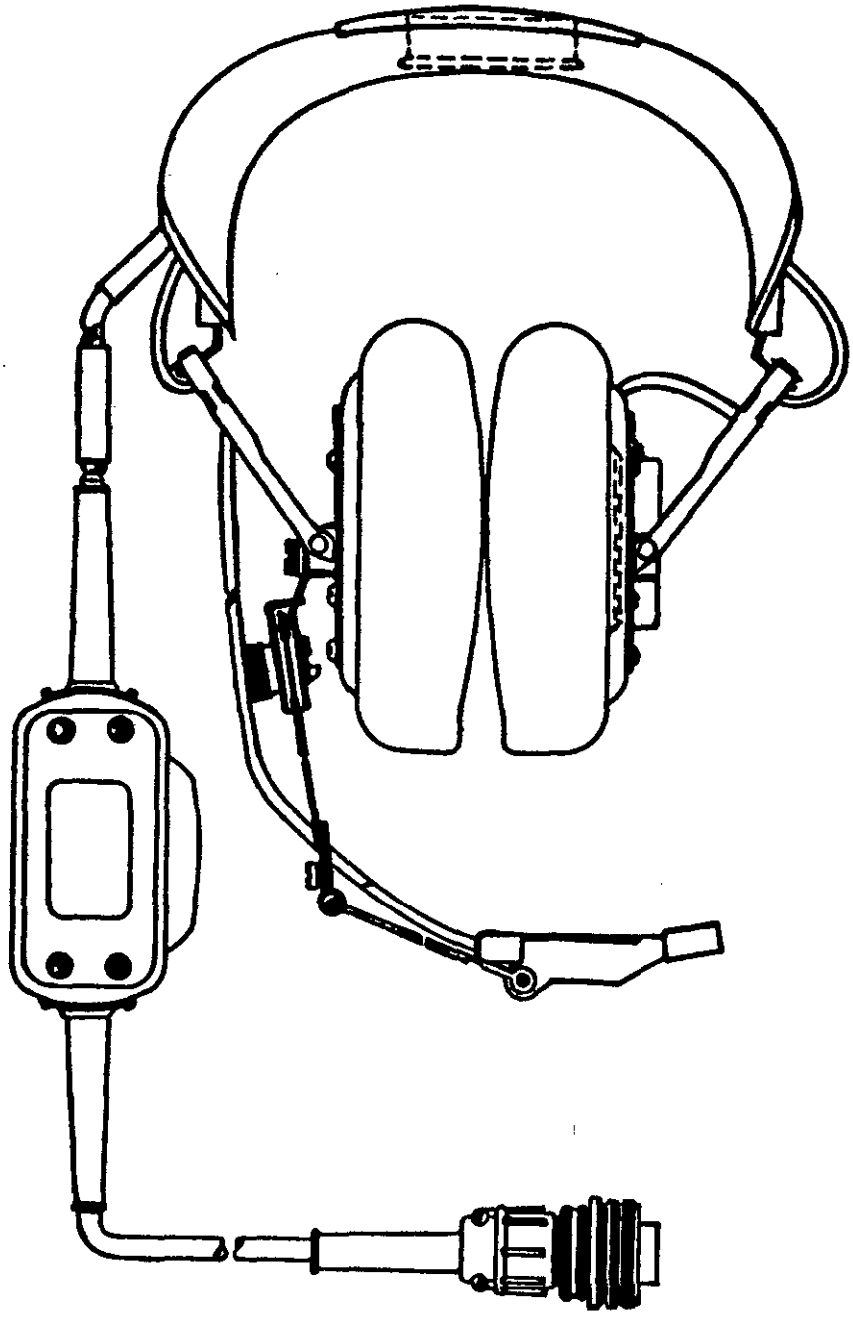

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET - MICROPHONE

NOMENCLATURE: H-172/U (Cont)

FEDERAL STOCK NO: 5965-715-4031

FUNCTIONAL DESCRIPTION:

The H-172/U is an extremely low-distortion, dynamic, noise-canceling headset-microphone which contains a transistor preamplifier in the headband.

CONSISTS OF:

1	Dynamic receiver element
2	Earphone cushions
1	Headband assembly, PC-16
1	Microphone, M-87/AIC
1	Cord (Microphone), MMOP-5
1	Cord assembly
1	Cord and plug assembly, Plug U-173/U
1	Connector 10-109614S-5P
1	Transistor preamplifier
1	In-line switch, D.P.S.T.

RELATIONSHIP TO SIMILAR EQUIPMENT:

PHYSICAL DESCRIPTION:

Dimensions:

Headband width (unextended)	6-1/2 inches (165.1 mm)
Earphone face (with cushion)	4-3/4 x 5-3/8 inches (120.65 mm x 136.53 mm) oval
Earphone depth (with cushion)	2-1/4 inches (57.15 mm)

Cord Data:

Length (headband to switch)	24 inches (609.6 mm)
Length (switch to connector)	51 inches (1,295.4 mm)
Number of conductors	5
Insulation	Synthetic rubber

TECHNICAL DESCRIPTION:

Earphone:

Impedance (at 1,000 Hz)	600 ohms
Frequency range	100 to 4,500 Hz

Microphone:

Impedance	3 ohms
Frequency range	300 to 4,500 Hz

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET - MICROPHONE

NOMENCLATURE: H-172/U (Cont)

FEDERAL STOCK NO: 5965-715-4031

ADDITIONAL TECHNICAL DATA:

Environmental Limitations:

Temperature (nonoperating) - - - - - - - - -60° C to +75° C
Temperature (operating)- - - - - - - - - - 0° C to +50° C
Resistance to salt spray and humidity.

REFERENCE DATA and LITERATURE

MIL-M-26542
BuShips Drawing RE51 127E


MANUFACTURER CODE	PART NUMBER
82872	H-172/U

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET - MICROPHONE

NOMENCLATURE: H-182( )/PT

FEDERAL STOCK NO: 5965-069-8885

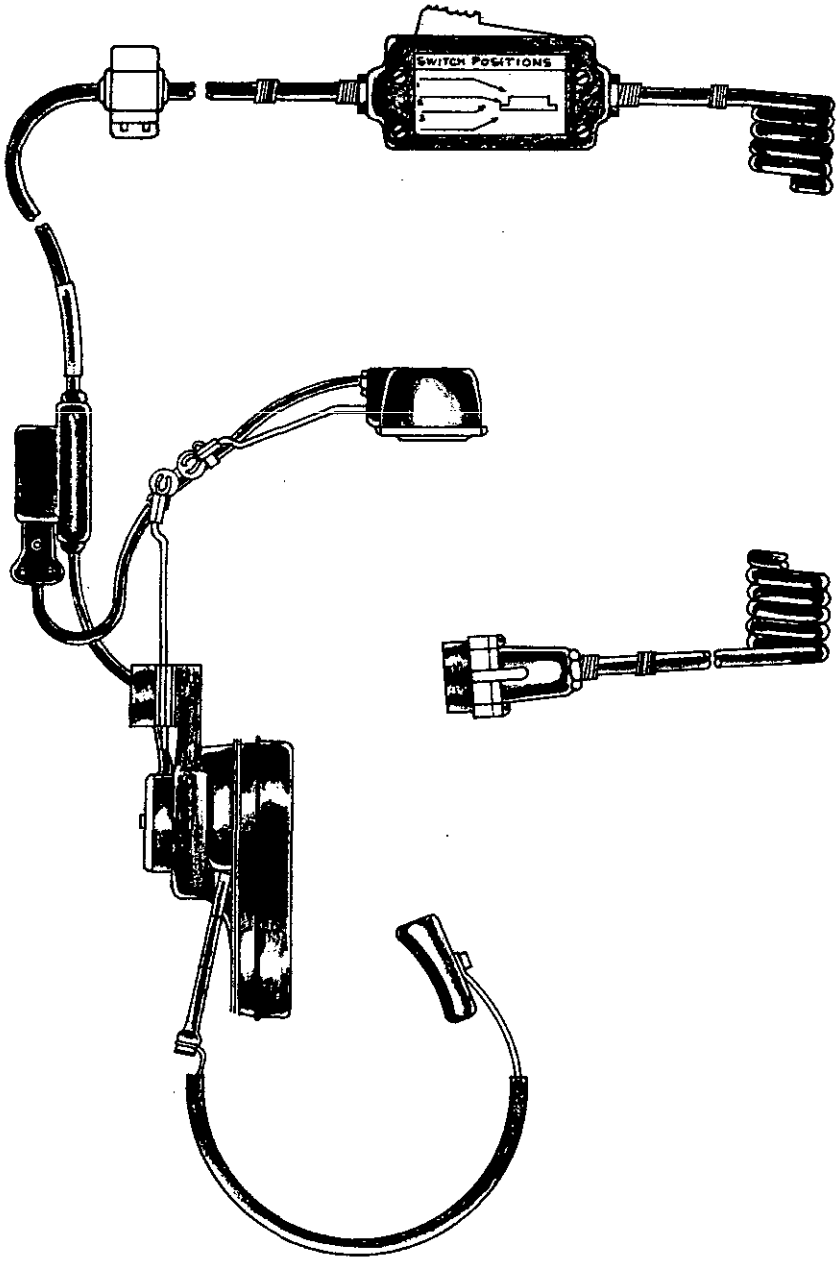

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET - MICROPHONE

NOMENCLATURE: H-182( )/PT (Cont)

FEDERAL STOCK NO: 5965-069-8885

FUNCTIONAL DESCRIPTION:

The H-182( )/PT has a single earphone and an adjustable, boom mounted microphone. The headset-microphone is intended to be used with telephone TA-312 and switchboard SB-22, and it is made to be worn under the combat helmet M-1.

CONSISTS OF:

1	Earphone element, magnetic type, TA-235( )PT
1	Earcup, with cushion
1	Headband, single type
3	Cord assemblies, no type number
1	Microphone bracket, wire type
1	Microphone, per MIL-H-12576
2	Connectors, U-161/U and U-055
1	Clothing clip, no type number
1	Switch box, no type number

RELATIONSHIP TO SIMILAR EQUIPMENT:

The H-182( )/PT replaces the H-144( )/U and is a part of SB-22/PT and SB-22A/PT.

PHYSICAL DESCRIPTION:

Earphone Dimensions	Not available
Microphone Dimensions	Not available

CORD DATA: (RETRACTILE)

Length (retracted)	12 inches (304.8 mm)

ADDITIONAL PHYSICAL DATA:

Connector Data:

Connector Type	Plug
Connector Designation	U-161/U

Headband Data:

Type	Single band
Construction	Vinyl covered with a vinyl head pad

Mounting and Suspension Data:

Microphone	Mounted on bracket which fits earcup and locks for optimum tacking position

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET - MICROPHONE

NOMENCLATURE: H-182( )/PT (Cont)

FEDERAL STOCK NO: 5965-069-8885

TECHNICAL DESCRIPTION: (MICROPHONE)

Input Operating Resistance	125 mA
Resistance	35 ohms dc
Frequency Range	800 to 4,000 Hz

TECHNICAL DESCRIPTION: (EARPHONE)

INPUT

Quantity of Earphones	1
Nominal Impedance	150 ohms
Frequency Range	100 to 5,500 Hz

ADDITIONAL TECHNICAL DATA:

Switch:

Position 1	For monitoring telephone or radio
Position 2	For "lock-on" telephone operation
Position 3	Nonlocking, for radio
Position 4	Push to talk for radio

Microphone connector pins molded into cable assembly. Clothing clip provided on cable assembly.

ENVIRONMENTAL LIMITATIONS:

Fungus	28 days, method 508, MIL-STD-810
Salt Fog	48 hours, method 509, MIL-STD-810
Blast	SKN-N-864
Sand and Dust	MIL-C-9436 and method 110, MIL-STD-202
Elevation	
Operating	Up to 15,000 feet
Nonoperating	Up to 50,000 feet
Humidity	5 continuous 48-hour cycles per MIL-STD-170
Immersion	3 feet water
Bounce	Package tester model 1,000SC and SC-A-46439 or equal
Vibration	5 hours, amplitude 0.03 inch .10 to 55 Hz
Drop	6 feet (1,828.8 mm) on concrete
Endurance	100 hours, 0.02 volt at 60 Hz ac
Temperature	
Operating	+125° F to -40° F
Nonoperating	+160° F to -80° F

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET - MICROPHONE

NOMENCLATURE: H-182( )/PT (Cont)

FEDERAL STOCK NO: 5965-069-8885

REFERENCE DATA and LITERATURE

Data List DL-SM-A-114883
MIL-H-55460
MIL-H-11996
MIL-H-12576


MANUFACTURER CODE	PART NUMBER
80058 18068	H-182( )/PT 21954

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET - MICROPHONE

NOMENCLATURE: H-210/G

FEDERAL STOCK NO: 5965-892-1068

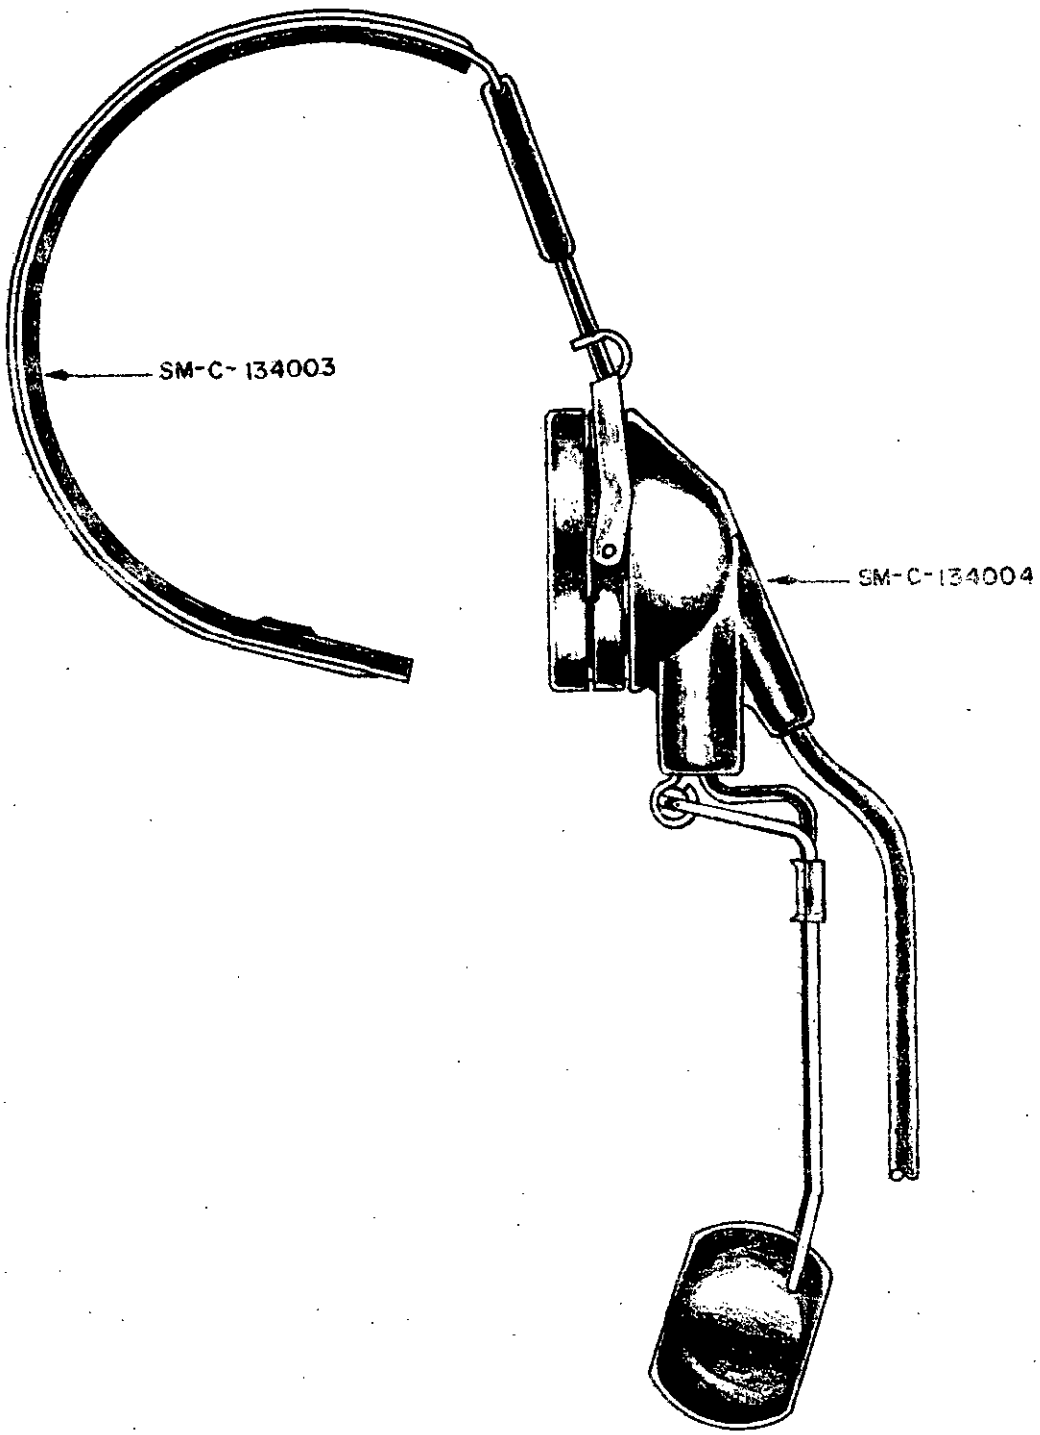

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET - MICROPHONE

NOMENCLATURE: H-210/G (Cont)

FEDERAL STOCK NO: 5965-892-1068

FUNCTIONAL DESCRIPTION:

This headset-microphone has one dynamic earphone and a carbon microphone.

CONSISTS OF:

1	Earphone
1	Earphone Shell
1	Headband
2	Cord Assemblies
1	Microphone Bracket
1	Microphone
1	Cord Assembly
1	Connector, U-163/U
1	Switch

RELATIONSHIP TO SIMILAR EQUIPMENT:

Similar to headset H-91, except it has a right angle connector type U-163/U instead of U-161/U.

PHYSICAL DESCRIPTION:

Earphone Dimensions	Not available
Microphone Dimensions	Not available

CORD DATA:

Length	62 inches (1,574.8 mm)

ADDITIONAL PHYSICAL DATA:

Connector Data:

Connector Type	Plug
Connector Designation	U-163/U (right angle type)

Headband Data:

Type	Single band
Construction	Extruded plastic web between two headband wires

Mounting and Suspension Data:

Microphone	Mounted on bracket which fits either earcup and locks when bracket thumbscrew is tightened

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET - MICROPHONE

NOMENCLATURE: H-210/G (Cont)

FEDERAL STOCK NO: 5965-892-1068

TECHNICAL DESCRIPTION: (MICROPHONE)

INPUT

Operating Current - - - - - - - - - - - - - - Not applicable

OUTPUT

Nominal Impedance - - - - - - - - - - - - - 30 ohms
Frequency Range - - - - - - - - - - - - - - 200 to 5,000 Hz

TECHNICAL DESCRIPTION: (EARPHONE)

INPUT

Quantity of Earphones - - - - - - - - - - - 2
Nominal Impadance - - - - - - - - - - - - - 300 ohms
Frequency Range - - - - - - - - - - - - - - 300 to 4,000 Hz

ADDITIONAL TECHNICAL DATA:

ENVIRONMENTAL LIMITATIONS:

Temperature - - - - - - - - - - - - - - - - - - -55° C to +85° C
Altitude - Up to 35,000 feet

REFERENCE DATA and LITERATURE

SC-DL-134001, except connector U-163/U instead of U-161/U
MIL-H-12576

MANUFACTURER CODE	PART NUMBER
80058	H-210/G

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

SECTION 6

HEADSET - CHEST SETS


Nomenclature, model or part number	Page
H-200/U, H-202/U	6.2.1
H-25/GT	6.3.1
H-44/U	6.4.1
H-36/U	6.5.1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET - CHEST SET

NOMENCLATURE: H-200/U; H-202/U

FEDERAL STOCK NO: 5965-900-6401; 5965-940-8699

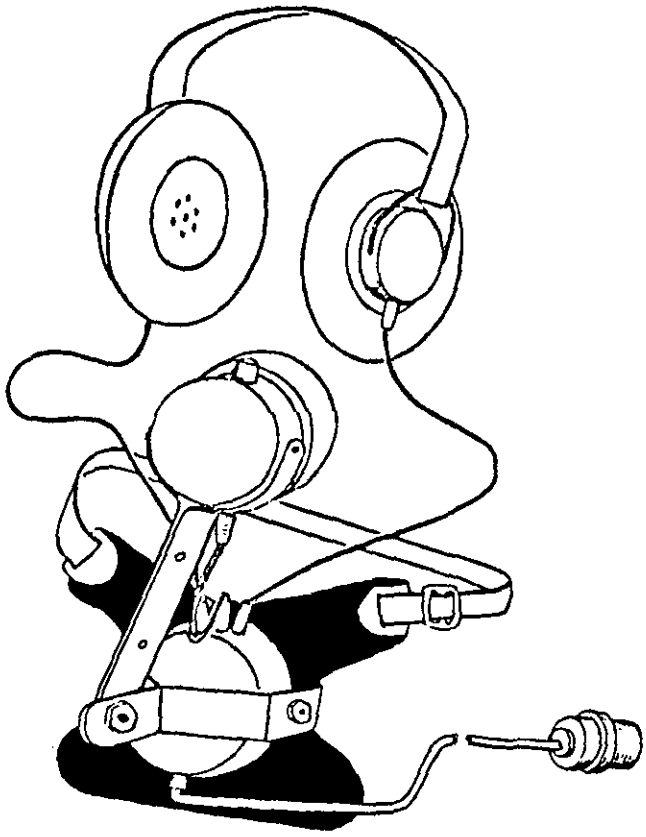

FUNCTIONAL DESCRIPTION:

The H-200/U is a sound powered headset-chest set specially designed for shipboard use. The complete set will withstand immersion and heavy salt spray.

CONSISTS OF:

1 Headband
1 Transmitter Assembly
2 Receiver Assemblies
1 Chestplate
1 Junction Box
1 Receiver Cable
1 Transmitter Cable
1 Jack Plug
1 Cable Assembly

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET - CHEST SET

NOMENCLATURE: H-200/U, H-202/U (Cont)

FEDERAL STOCK NO: 5965-900-6401, 5965-940-8699

RELATIONSHIP TO SIMILAR EQUIPMENT:

H-202/U similar to H-200/U except equipped with cushioned hard shell ear cups.

PHYSICAL DESCRIPTION:

HEADSET DIMENSIONS:

Earphone diameter (with cushion)	4-1/2 inches (114.3 mm)
Earphone depth (with cushion)	2 inches (50.8 mm)

CHEST SET DIMENSIONS:

Nominal height	6-1/2 inches (165.1 mm)
Nominal width	5-1/2 inches (139.7 mm)
Nominal depth	4-1/2 inches (114.3 mm)
Cord length	20 feet (609.60 mm)
Weight	4-1/2 pounds

ADDITIONAL PHYSICAL DATA:

Ear Cushion Material	*Nylon-covered Neoprene*
Chestplate Material	Aluminum
Junction Box Material	Rubber
Cordset Composition	Tinsel
Connector Designation	Navy Type S-74211
Chestplate Suspension	Neck Strap

TECHNICAL DESCRIPTION: (MICROPHONE)

INPUT

Operating Current	Not applicable

OUTPUT

Nominal Impedance	60 ohms
Frequency range	500 to 2,600 Hz

TECHNICAL DESCRIPTION: (EARPHONES)

INPUT

Quantity of Earphones	2
Nominal Impedance	1,200 ohms
Frequency Range	500 to 2,500 Hz

Source: https://assist.dla.mil -- Downloaded: 202640-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET - CHEST SET

NOMENCLATURE: H-200/U, H-202/U (Cont)

FEDERAL STOCK NO: 5965-900-6401, 5965-940-8699

REFERENCE DATA and LITERATURE

MIL-T-15514


MANUFACTURER CODE	PART NUMBER
78957	702019-375, type H-200/U 702020-230, type H-202/U
78957	701005-379
78957	702003-278
78957	702003-277
78957	701004-327
78957	702001-918
78957	702003-551
78957	702003-552
78957	702004-232
78957	702011-551

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET - CHEST SET

NOMENCLATURE: H-25/GT

FEDERAL STOCK NO: 5965-587-0767

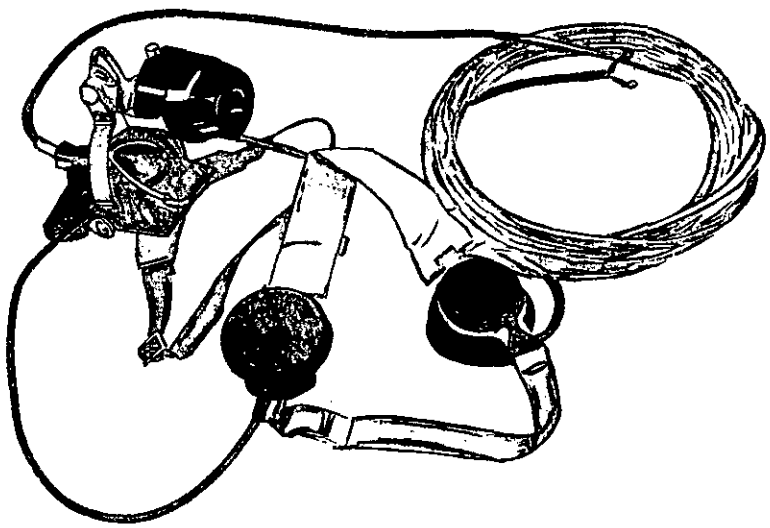

FUNCTIONAL DESCRIPTION:

Headset-Chest Set, Electrical H-25/GT is a sound powered telephone set capable of operation as a complete unit without use of a power source. The set is not designed for use in the same installation with battery powered telephones, but in an emergency can be used in the same system without damage to the sound powered set.

The H-25/GT is portable, light and easily handled.

CONSISTS OF:

1 Cable Assembly, Special Purpose, Electrical
1 Cord Assembly, Electrical (coil)
2 Cord Assemblies, Electrical
2 Earphones
1 Headband, Headset
1 Junction Box
1 Plate
2 Straps, Webbing, Adjusting
1 Strap, Webbing, Chin
1 Transmitter Unit
2 Yoke Assemblies, Oval-Shaped
1 Yoke Assembly

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET - CHEST SET

NOMENCLATURE: H-25/GT (Cont)

FEDERAL STOCK NO: 5965-587-0767

RELATIONSHIP TO SIMILAR EQUIPMENT:

Similar to H-44/U Headset-Chest Set, Electrical.

PHYSICAL DESCRIPTION:

CRATED:

Weight	8.5 pounds
Volume	1.1 cubic feet

CABLE DATA:

Length	16 inches (406.4 mm)
Wire Size	19 AWG
Jacket	Rubber
Diameter	0.260 inches (6.60 mm)

COIL CORD ASSEMBLY DATA:

Length	21.8 feet
Insulation	Rubber

CORD ASSEMBLIES DATA:

Length	19 inches (482.6 mm)
Insulation	Rubber

HEADBAND DATA:

Material	Cotton webbing
Color	Tan
Length	7.5 (190.50 mm) to 12.5 inches (317.50 mm) (adjustable)
Width	1.5 inches (38.10 mm)

JUNCTION BOX DATA:

Material	Fiber
Finish	Red lacquer
Length	3.5 inches (88.90 mm)
Width	2.5 inches (63.50 mm)
Depth	0.437 inches (11.10 mm)

PLATE DATA:

Material	Brass
Length	5.25 inches (133.35 mm)
Width	4.312 inches (109.52 mm)
Thickness	0.062 inches (1.57 mm)

Source: https://assist.dla.mil -- Downloaded: 202640-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET - CHEST SET

NOMENCLATURE: H-25/GT (Cont)

FEDERAL STOCK NO: 5965-587-0767

PHYSICAL DESCRIPTION: (Cont)

STRAP DATA:

Material	Cotton webbing
Length	7.5 (190.50 mm) to 12.5 inches (317.50 mm) (adjustable)
Width	1.5 inches (38.10 mm)

CHIN STRAP DATA:

Material	Cotton webbing
Length	12 inches (304.8 mm) (adjustable)
Width	0.75 inches (19.05 mm)

STRAP DATA:

Material	Cotton webbing
Color	Black
Length	10.25 (260.35 mm) to 18.62 inches (472.95 mm) (adjustable)
Width	0.75 inches (19.05 mm)

OVAL-SHAPED YOKE ASSEMBLY DATA: (Receiver to headband)

Length	2.875 inches (73.03 mm)
Width	1.188 inches (30.18 mm)
Depth	0.375 inches (9.53 mm)

YOKE ASSEMBLY DATA:
(Connection transmitter unit to chest plate)

Material	Brass
Length	7.125 inches (180.98 mm)
Width	5.125 inches (130.18 mm)

TECHNICAL DESCRIPTION:

HEADSET:

Impedance	900 ohms

TRANSMITTER UNIT:

Impedance	45 ohms
Length	1.312 inches (33.32 mm)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET - CHEST SET

NOMENCLATURE: H-25/GT (Cont)

FEDERAL STOCK NO: 5965-587-0767

REFERENCE DATA and LITERATURE

Marine Corps SL-1-2, Index of Authorized Supply and Maintenance Publication, Prefix Control 121 000002, Components List SL-3-00353A; Headset - Chest Set, Electrical H-25/GT Prefix Control 123 003530.


MANUFACTURER CODE	PART NUMBER
04773	H-25/GT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET - CHEST SET

NOMENCLATURE: H-44/U (MODIFIED)

FEDERAL STOCK NO: 5965-501-2938

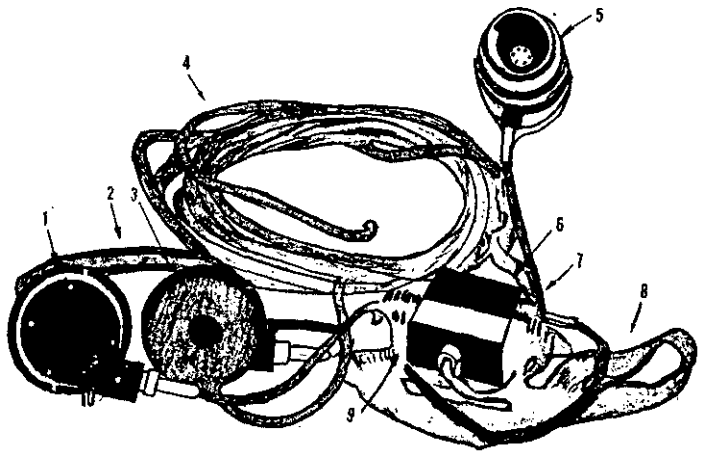

FUNCTIONAL DESCRIPTION:

Headset - Chest Set, Electrical, H-44/U (Modified) is a sound-powered telephone set, which receives its operating power from voice-sound waves striking the transmitter diaphragm. An audio-frequency voltage is generated and transmitted to the receiver which converts the signal back to sound. The removal of the telephone plug from the cable makes it possible to use other plugs as required.

The high-impedance of this sound-powered telephone set produces maximum efficiency when speaking directly into the transmitting element. It is also used where line losses are relatively low (approx. 15 dB) for point-to-point communication.

The set is not designed for use in the same installation, with battery-powered telephones, but may be used in an emergency without damage to the sound-powered set.

CONSISTS OF:

HEADSET:

1 Cord Assembly, Electrical (Coded black and white)
1 Cord Assembly, Electrical (Coded red, white, and black)
2 Earphones
2 Guards (0.5 inches (12.70 mm) long), nickel-plated
1 Guard (0.688 inches (17.48 mm) long), nickel-plated
1 Headband, Headset
1 Housing (For left-hand receiver element)
1 Housing (For right-hand receiver element)

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET - CHEST SET

NOMENCLATURE: H-44/U (MODIFIED) (Cont)

FEDERAL STOCK NO: 5965-501-2938

CONSISTS OF: (Cont)

MICROPHONE:

1 Microphone, Dynamic
1 Chest Plate
1 Strap, Webbing
1 Terminal Box

RELATIONSHIP TO SIMILAR EQUIPMENT:

Similar to headset H-25/GT.

PHYSICAL DESCRIPTION:

CRATED:

Weight	8.5 pounds
Volume	1.1 cubic feet

CORD DATA:

Coded Black - White

Length	20.5 feet
Wire Type	Tinsel
Wire Size	19 AWG
Insulation	Plastic with rubber jacket
Termination	Terminal lug one end Terminal fittings other end
No. of Conductors	2

Coded Red - White - Black

Length	15.5 inches (393.70 mm)
Wire Type	Tinsel
Wire Size	19 AWG
Insulation	Rubber with rubber jacket
Termination	Terminal lugs on each end
No. of Conductors	3

GUARDS:

Quantity:

2	Diameter 0.5 inches (12.70 mm) Length 1.312 inches (33.32 mm)
1	Diameter 0.688 inches (17.48 mm)
Material	Brass
Finish	Nickel plated
Further description	Spring with brass coupling

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET - CHEST SET

NOMENCLATURE: H-44/U (MODIFIED) (Cont)

FEDERAL STOCK NO: 5965-501-2938

PHYSICAL DESCRIPTION: (Cont)

HEADBAND DATA:

Material	Steel
Type	Single-flat adjustable band
Band Covering	Leather

HOUSING DATA (1 for left-hand and 1 for right-hand receiver):

Length	3 inches (76.2 mm)
Width	2.219 inches (56.36 mm)
Depth	0.594 inches (15.09 mm)
Further Description	2 connection wires, 2 contacts
Wire Size	20 AWG
Quantity	1

CHEST PLATE DATA:

Material	Brass
Finish	Enamel
Shape	Irregular
Further Description	Collapsible and adjustable; held on chest by neck straps
Length	9.5 inches (241.30 mm)
Width	5.25 inches (133.35 mm)
Diameter	1.375 inches (34.93 mm)

STRAP (WEBBING) DATA:

Material	Cotton webbing
Length	20.5 inches (520.70 mm)
Width	0.75 inches (19.05 mm)
Thickness	0.125 inches (3.18 mm)
Further Description	Brass clip on one end, with sliding tongue-less brass buckle

TERMINAL BOX DATA:

Shape	Rectangular
Length	3.703 inches (94.06 mm)
Width	2.891 inches (73.43 mm)
Depth	1.062 inches (41.15 mm)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET - CHEST SET

NOMENCLATURE: H-44/U (MODIFIED) (Cont)

FEDERAL STOCK NO: 5965-501-2938

PHYSICAL DESCRIPTION: (Cont)

EARPHONE DATA:

Material:	
Cap	Rubber
Shell	Plastic
Length (over-all)	2.844 inches (72.24 mm)
Width (over-all)	1.312 inches (33.32 mm)
Diameter	3.875 inches (98.43 mm)

MICROPHONE DATA:

Length	2.625 inches (66.68 mm)
Width	2.25 inches (57.15 mm)
Diameter	2.50 inches (63.5 mm)

TECHNICAL DESCRIPTION: (HEADSET)

Quantity of Earphones	2
Frequency Range	500 to 2,500 Hz
Type	Magnetic
Impedance	1,380 ohms

TECHNICAL DESCRIPTION: (MICROPHONE)

Frequency Range	500 to 2,500 Hz
Impedance	150 ohms
Type	Magnetic
Further Description	With mouthpiece, transmitter element, and cover

REFERENCE DATA and LITERATURE

Marine Corps Stock List: Components List SL-3-00357A for Headset - Chest Set, Electrical, H-44/U Prefix Control No. 123 003570

MANUFACTURER CODE	PART NUMBER
3E684	UA 636
3E684	UA 772
3E684	UA 823
3E684	UA 845
3E684	UA 846-1
3E684	UA 846-2
3E684	UA 848
3E684	UA 849
3E684	UA 1559
3E684	UA 1629
3E684	UA 1710

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET - CHEST SET

NOMENCLATURE: H-36/U

FEDERAL STOCK NO: 5965-243-0146

NO ILLUSTRATION AVAILABLE

FUNCTIONAL DESCRIPTION:

Headset-Chest Set, H-36/U is a lightweight earphone set with a noise cancelling, lip type microphone and a control unit which mounts on the operator's chest. The components which make up Headset-Chest Set, H-36/U are particularly well insulated from external noises. The earphone of H-36/U are especially designed to be worn under an infantry or crash type helmet with or without a gas mask.

CONSISTS OF:

1 Chestplate Assembly
1 Microphone Assembly
1 Headset Assembly

RELATIONSHIP TO SIMILAR EQUIPMENT:

Similar in function to the H-161( )/U Headset-Microphone.

PHYSICAL DESCRIPTION:

Weight - 12 pounds
Cube - 1 cubic feet
Dimensions - 1.5 square feet

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET - CHEST SET

NOMENCLATURE: H-36/U (Cont)

FEDERAL STOCK NO: 5965-243-0146

PHYSICAL DESCRIPTION: (Cont)

CHESTPLATE ASSEMBLY:

Material of Chestplate	Brass
Finish	Black enamel
Chest Unit	2 cords and straps
Connectors	On line end and to the microphone
Signal Chest Set	TD-3, incl.

HARNESS CHEST SET:

Strap Material	Cotton webbing
Length of Strap	60 inches (1,524 mm)
Width of Strap	0.75 inches (19.05 mm)
Ends	Clip and clip spring on one end, tip and slide on other end
Environmental	Water resistant
Environmental	Mildew resistant
Signal Strap	ST-25 (used to carry chest unit)

HARNESS CHEST SET:

Material, Strap	Cotton webbing
Length of Strap	36 inches (1,024.4 mm)
Width of Strap	0.75 inches (19.05 mm)
Ends	"S" clip assembly one end, tip type other end
Environmental	Water repellent
Environmental	Mildew resistant
Signal Strap	ST-24 (used to carry chest unit)

HEADSET, ELECTRICAL: HS-30 (see MIL-H-13109/2)

Type Headband	Single
Length of Headband	7.5 inches (190.5 mm)
Cord Insulation	Rubber
Clip	Clothing clip on cord

CUSHIONS: Rubber, ear-insert type

Length	0.580 inches (14.73 mm)
Diameter	0.656 inches (16.66 mm)
Mounting	Slip over end of earphone
Quantity	10 (8 spares)
Signal Insert	M-300

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET - CHEST SET

NOMENCLATURE: H-36/U (Cont)

FEDERAL STOCK NO: 5965-243-0146

PHYSICAL DESCRIPTION: (Cont)

EARPHONES:	R-30-U (see MIL-H-13109)
Material, Shell	Plastic
Cap Material	Plastic
Diameter	0.9 inches (22.86 mm)
Length	0.688 inches (17.48 mm)
Quantity	2
Terminals	2 internal screw type

TECHNICAL DESCRIPTION: (MICROPHONE)

Mounting	Face strap
Type	Noise cancelling, carbon
Resistance	40 to 100 ohms, dc
Frequency Range	200 to 4,000 Hz

TECHNICAL DESCRIPTION: (EARPHONE)

INPUT

Power	6 microwatts
Quantity of Earphones	2
Nominal Impedance	128 ohms (series connected)
Frequency Range	400 to 3,500 Hz

ADDITIONAL TECHNICAL DATA:

Environmental Limitations:

Equipment Operating:

Temperature	-40° F to +131° F
Elevation	Up to 10,000 feet above sea level
Relative Humidity	Up to 98 percent

Equipment Nonoperating:

Temperature	-80° F to +160° F
Elevation	Up to 50,000 feet above sea level
Relative Humidity	Up to 100 percent including condensation caused by temperature changes
Immersion	Resistant

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HEADSET - CHEST SET

NOMENCLATURE: H-36/U (Cont)

FEDERAL STOCK NO: 5965-243-0146

REFERENCE DATA and LITERATURE

MIL-M-11703
TM 11-5965-228-12P
MIL-H-13109

MANUFACTURER CODE	PART NUMBER
80064	H-36/U

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

SECTION 7

HANDSETS


Nomenclature, model or part number	Page
A257-2	7.2.1
A555	7.3.1
A560/S10	7.4.1
A560/S50	7.5.1
H-33F/PT	7.6.1
H-60( )/PT	7.7.1
H-90( )/U	7.8.1
H-94( )/U	7.9.1
H-111( )/U	7.10.1
H-121( )/U	7.11.1
H-138( )/U	7.12.1
H-156( )/U	7.13.1
H-165( )/U	7.14.1
H-169/U	7.15.1
H-203/U	7.16.1
H-207( )/VRC	7.17.1
H-250/U	7.18.1
TS-9( )	7.19.1
NT-51007A	7.20.1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HANDSET

NOMENCLATURE: COMMERCIAL A257-2

FEDERAL STOCK NO: 5965-249-8157

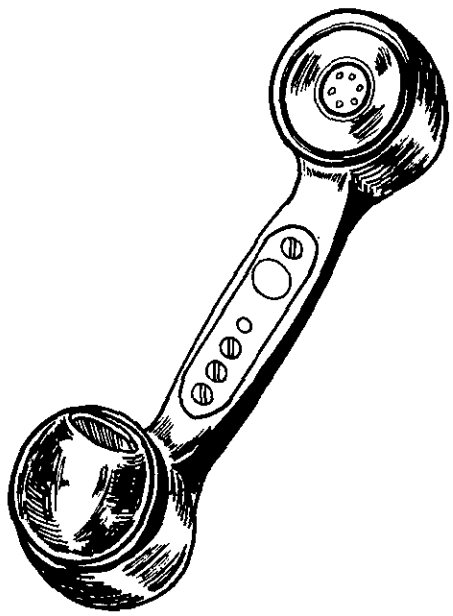

FUNCTIONAL DESCRIPTION:

This handset is a sound powered type containing a dynamic receiver element and a dynamic microphone element. This handset is rugged and weather proof and may therefore be used for outdoor applications. The unit has a built-in press-to-operate switch. Transmitter and receiver units are plug-in type. It is suitable for most general purpose handset applications.

CONSISTS OF:

1 Receiver Unit U.S. Instrument Part No. UA1614-3
1 Switch U.S. Instrument Part No. UA781-2
1 Handset Handle U.S. Instrument Part No. UA1525
1 Mouthpiece U.S. Instrument Part No. UA976-1
1 Transmitter Unit U.S. Instrument Part No. UA1614-4
1 Cable U.S. Instrument Part No. 1678

RELATIONSHIP TO SIMILAR EQUIPMENT:

PHYSICAL DESCRIPTION:

Dimensions: (Over-all)

Length	9 inches (228.60 mm)
Width	2.31 inches (58.67 mm)
Depth (Transmitter End)	4.13 inches (104.90 mm)
Weight	22 ounces without cord.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HANDSET

NOMENCLATURE: COMMERCIAL A257-2 (Cont)

FEDERAL STOCK NO: 5965-249-8157

PHYSICAL DESCRIPTION: (Cont)

Cord Data:

Length	4.50 feet (1371.60 mm)
No. of Conductors	2
No. of Connectors	2
Type Connector	Lug Type

TECHNICAL DESCRIPTION: (MICROPHONE)

INPUT

Operating Current	Not applicable

OUTPUT

Nominal Impedance	1,600 ohms
Frequency Range	500 to 2,500 Hz

TECHNICAL DESCRIPTION: (EARPHONE)

INPUT

Quantity of Earphones	1
Nominal Impedance	1,150 ohms
Frequency Range	500 to 2,500 Hz

ADDITIONAL TECHNICAL DATA:

REFERENCE DATA and LITERATURE

United States Instrument Corporation Data Sheet D464
United States Instrument Corporation Catalog 500B TRE. C4R. 5-62 10M
MSS 5965-4


MANUFACTURER CODE	PART NUMBER
78957	A257-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HANDSET

NOMENCLATURE: COMMERCIAL A555

FEDERAL STOCK NO: 5965-294-6113

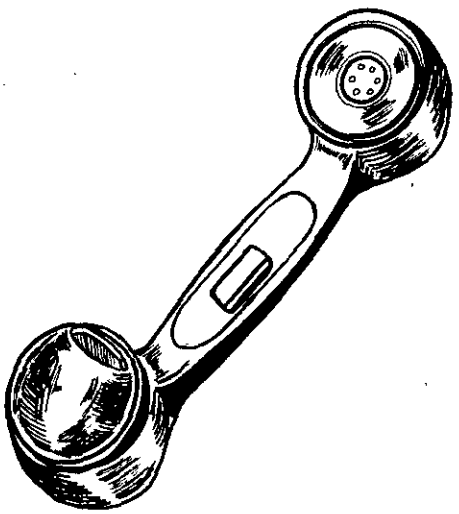

FUNCTIONAL DESCRIPTION:

This handset is a sound powered type containing a magnetic receiver element and a magnetic microphone element. This handset is rugged and weatherproof and may therefore be used for outdoor applications. The unit is useful for most general purpose telephone applications.

CONSISTS OF:

1	Receiver Unit	U. S. Instrument Corp.	Part No. UA1614-15
1	Receiver Ear Cap	U. S. Instrument Corp.	Part No. 1055
1	Handset Handle	U. S. Instrument Corp.	Part No. 1980
1	Transmitter Unit	U. S. Instrument Corp.	Part No. UA1614-15
1	Mouthpiece	U. S. Instrument Corp.	Part No. 976-1
1	Cable Assembly	U. S. Instrument Corp.	Part No. 2467-7

RELATIONSHIP TO SIMILAR EQUIPMENT:

Similar to the A-560 handset except that the A-560 is equipped with a push-to-talk switch.

PHYSICAL DESCRIPTION:

Dimensions (Over-all):

Length	9 inches (228.60 mm)
Width	2.31 inches (58.67 mm)
Depth	4.13 inches (104.90 mm)
Weight	20 ounces (approximate)

Source: https://assist.dla.mil -- Downloaded: 202640-26T13:37Z
Check the source to verify that this is the currentversion before use.

ITEM NAME: HANDSET

NOMENCLATURE: A555 (Cont)

FEDERAL STOCK NO: 5965-294-6113

PHYSICAL DESCRIPTION: (Cont)

Cord Data:

Length	4 feet (1219.20 mm)
No. of Conductors	2
Jacket Material	Rubber

TECHNICAL DESCRIPTION: (MICROPHONE)

OUTPUT

DC Resistance	60 ohms
AC Impedance (Warble frequency test, 500 to 2,500 cps)	1,400 ohms
Frequency Range	500 to 2,500 Hz
Frequency of Maximum Response	Approximately 1,700 Hz

TECHNICAL DESCRIPTION: (EARPHONE)

INPUT

DC Resistance	60 ohms
AC Impedance (Warble frequency test, 500 to 2,500 Hz)	1,140 ohms
Frequency Range	500 to 2,500 Hz

REFERENCE DATA and LITERATURE

U. S. Instrument Corp. Drawing No. A555
U. S. Instrument Corp. Data Sheet No. D657-1
U. S. Instrument Corp. Catalog 500B


MANUFACTURER CODE	PART NUMBER
78957	A555

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HANDSET

NOMENCLATURE: COMMERCIAL A560/S10

FEDERAL STOCK NO: 5965-816-7984

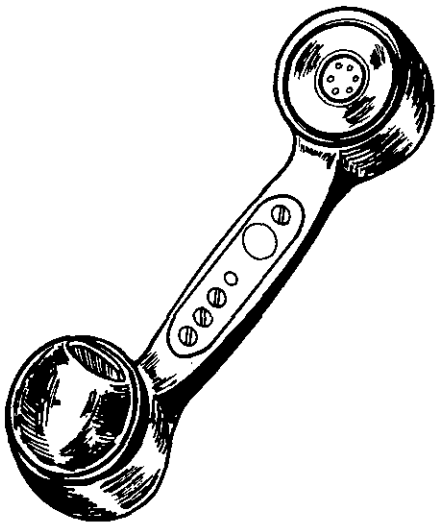

FUNCTIONAL DESCRIPTION:

The A560/S10 is a rugged, weatherproof, sound powered handset employing magnetic receiver and transmitter elements. It is applicable to most general telephone purposes.

CONSISTS OF:

1 Receiving and transmitting instrument U.S. Inst. Corp. Part No. UA1614-15
1 Receiver Ear Cap U.S.I.C. 1055
1 Telephone Handle U.S.I.C. 974-1
1 Mouthpiece U.S.I.C. 976-1
1 Cable Assy U.S.I.C. UA2467-7
1 Connector Plug

RELATIONSHIP TO SIMILAR EQUIPMENT:

Similar to the A555 except for the press-to-talk switch. Identical to the A560/S50 except for the plug.

PHYSICAL DESCRIPTION:

Length	9 inches (228.6 mm)
Width	2.31 inches (58.67 mm)
Depth (Transmitter End)	4.13 inches (104.90 mm)
Weight (Without Cord)	22 ounces

ADDITIONAL PHYSICAL DATA:

Cord Data:

Length	4 feet (1,219.2 mm)
Number of Conductors	2
Jacket Material	Rubber

Connector Data:

Telephone Type	
Shank Length (Including Tip)	938 inches
Shank Diameter	875 inches

Source: https://assist.dla.mil -- Downloaded: 202640-26T13:37Z
Check the source to verify that this is the currentversion before use.

ITEM NAME: HANDSET

NOMENCLATURE: COMMERCIAL A560/S10 (Cont)

FEDERAL STOCK NO: 5965-816-7984

TECHNICAL DESCRIPTION: (MICROPHONE)

INPUT

Operating Current	Not applicable

OUTPUT

DC Impedance	60 ohms
AC Impedance (Warble frequency test, 500 to 2,500 Hz)	1,400 ohms
Frequency Range	500 to 2,500 Hz
Frequency of Maximum Response	Approximately 1,700 Hz

TECHNICAL DESCRIPTION: (EARPHONE)

INPUT

DC Impedance	60 ohms
AC Impedance (Warble frequency test, 500 to 2,500 Hz)	1,140 ohms
Frequency Range	500 to 2,500 Hz

ADDITIONAL TECHNICAL DATA:

REFERENCE DATA and LITERATURE

U.S Instrument Corp. Drawing No. A560K
U.S. Instrument Corp. Data Sheet No. D657-1
U.S. Instrument Corp. Catalog 500B


MANUFACTURER CODE	PART NUMBER
78957	A560/S10

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HANDSET

NOMENCLATURE: COMMERCIAL A560/S50

FEDERAL STOCK NO: 5965-808-6261

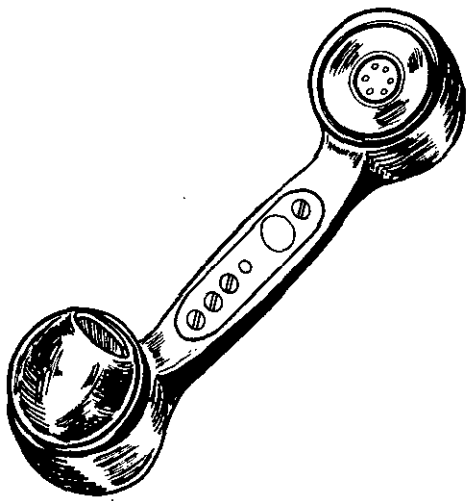

FUNCTIONAL DESCRIPTION:

The A560/S50 is a rugged, weatherproof, sound powered handset employing magnetic receiver and transmitter elements. It is applicable to most general telephone purposes.

CONSISTS OF:

1 Receiving and Transmitting Instrument U.S. Instrument Corporation Part No. UA-1614-15
1 Receiver Ear cap U.S.I.C. 1055
1 Telephone Handle U.S.I.C. 974-1
1 Mouthpiece U.S.I.C. 976-1
1 Connector Plug

RELATIONSHIP TO SIMILAR EQUIPMENT

Similar to the A555 except for the press-to-talk switch. Identical to the A560/S10 except for the plug.

PHYSICAL DESCRIPTION:

Length	9 inches (228.6 mm)
Width	2.31 inches (58.67 mm)
Depth (Transmitter End)	4.13 inches (104.90 mm)
Weight (without cord)	22 ounces

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HANDSET

NOMENCLATURE: COMMERCIAL A560/S50 (Cont)

FEDERAL STOCK NO: 5965-808-6261

ADDITIONAL PHYSICAL DATA:

Cord Data:

Length	4 feet (1,219.2 mm)
Number of Conductors	2
Jacket Material	Rubber

Connector Data:

Telephone Type	
Shank length (Including tip)	1.25 inches (31.75 mm)
Shank Diameter	2.50 inches (63.50 mm)

TECHNICAL DESCRIPTION: (MICROPHONE)

INPUT

Operating Current	Not applicable

OUTPUT

DC Impedance	60 ohms
AC Impedance (Warble frequency test, 500 to 2,500 Hz)	1,400 ohms
Frequency Range	500 to 2,500 Hz
Frequency of Maximum Response	Approximately 1,700 Hz

TECHNICAL DESCRIPTION: (EARPHONE)

INPUT

DC Impedance	60 ohms
AC Impedance (Warble frequency test, 500 to 2,500 Hz)	1,140 ohms
Frequency Range	500 to 2,500 Hz

ADDITIONAL TECHNICAL DATA:

REFERENCE DATA and LITERATURE

U.S. Instrument Corp. Drawing No. A560K
U.S. Instrument Corp. Data Sheet No. D657-1
U.S. Instrument Corp. Catalog 500B


MANUFACTURER CODE	PART NUMBER
78957	A560/S50

Source: https://assist.dla.mil -- Downloaded: 202640-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HANDSET

NOMENCLATURE: H-33F/PT

FEDERAL STOCK NO: 5965-163-9947

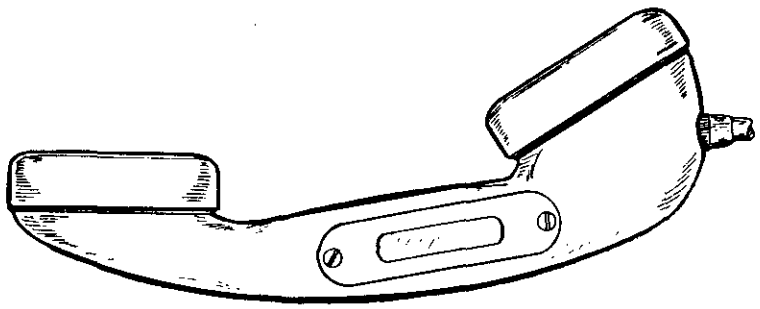

FUNCTIONAL DESCRIPTION:

Handset H-33F/PT is a battery powered type handset intended for use with radio equipment. The unit is waterproof and withstands severe environmental conditions. This handset is therefore suitable for outdoor use. It is used as part of Control Group AN/GRA-6, and AN/GRC-106( ) P/O AN/PRC-41( ).

CONSISTS OF:

1 Handset H-33F/PT
Including:
1 Microphone Element M-35/U
1 Receiver Element Signal Corps Drawing No. SC-C-105379
1 Switch Assembly 104-B-23
1 Handle Assembly Drawing No. SC-D-76326
1 Cable Assembly U-161/U

RELATIONSHIP TO SIMILAR EQUIPMENT:

PHYSICAL DESCRIPTION:

Dimensions (Over-all):

Length	7.44 inches (188.98 mm)
Depth	3.06 inches (77.72 mm)

Dimensions: (Receiver)

Depth	.88 inch (22.23 mm)
Diameter	2.06 inches (52.32 mm)

Dimensions: (Microphone)

Diameter	1-5/8 inches (41.28 mm)
Depth	0.390 inch (9.91 mm)

Cord Data:

Length (Retracted)	11 inches (279.4 mm)
Length (Extended)	48 inches (1219.2 mm)
No. of Conductors	7
Connector Designation	Pin type
Weight	Not Rated

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HANDSET

NOMENCLATURE: H-33F/PT (Cont)

FEDERAL STOCK NO: 5965-163-9947

TECHNICAL DESCRIPTION: (MICROPHONE)

INPUT

Operating Current	100 mA

OUTPUT

Nominal Impedance	40 ohms
Frequency Range	300 to 4, 000 Hz

TECHNICAL DESCRIPTION: (EARPHONE)

INPUT

Quantity of Earphones	1
Nominal Impedance	300 ohms
Frequency Range	300 to 4, 000 Hz

ADDITIONAL TECHNICAL DATA:

ENVIRONMENTAL LIMITATIONS:

Equipment Operating:

Temperature	-40° F to +150° F
Elevation	Up to 10, 000 feet

Equipment Nonoperating:

Temperature	-80° F to +160° F
Relative Humidity	Up to 98%
Elevation	10, 000 to 50, 000 feet above sea level
Immersion	3 feet of water for 2 hours
Blast	In accordance with MIL-H-11134

REFERENCE DATA and LITERATURE

MIL-H-11134
Telephonics Corporation Drawing 10056
MSS 5965-4


MANUFACTURER CODE	PART NUMBER
78711 80058 82872	6461 H-33F/PT 8Z872

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HANDSET

NOMENCLATURE: H-60( )/PT

FEDERAL STOCK NO: 5965-669-9145

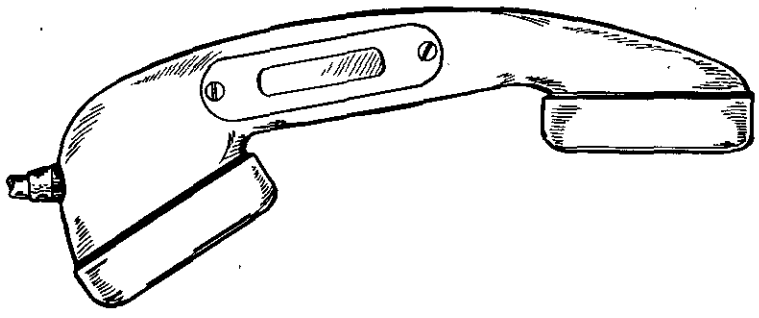

FUNCTIONAL DESCRIPTION:

Handset H-60( )/PT is intended for use with wire communication equipment. The unit is waterproof and withstands severe environmental conditions. This handset is therefore suitable for outdoor use. It is used as part of Intercom Station AN/VIA-4, AN/MTC-3( ).

CONSISTS OF:

1 Handset H-60( )/PT
Including:
1 Transmitter Element - TA-117( )/PT
1 Receiver Element Telephone TA-235( )/PT
1 Switch Assembly SA-129/PT
1 Handle See SC-DL-207906
1 Electrical Cord Assembly - CX2151( )/U

RELATIONSHIP TO SIMILAR EQUIPMENT:

Handsets H-60( )/PT, H-156( )/U, and H-165( )/U have the same electrical and mechanical construction except the cord assemblies are different.

PHYSICAL DESCRIPTION:

Dimensions (Over-all):

Length	8.44 inches (214.38 mm)
Depth	2.80 inches (71.12 mm)
Receiver Diameter	2.56 inches (65.02 mm)
Transmitter Diameter	2.59 inches (65.79 mm)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HANDSET

NOMENCLATURE: H-60( )/PT (Cont)

FEDERAL STOCK NO: 5965-669-9145

Cord Data:

Length (Retracted)	9 inches (228.6 mm)
Length (Extended)	36 inches (914.4 mm approximately)
No. of Conductors	7
Connector Designation	Pin type
Weight	Not Rated

TECHNICAL DESCRIPTION: (MICROPHONE)

INPUT

Operating Current	125 mA (maximum)

OUTPUT

Nominal Resistance	35 ohms
Frequency Range	500 to 4,000 Hz

TECHNICAL DESCRIPTION: (EARPHONE)

INPUT

Quantity of Earphones	1
Nominal Impedance	150 ohms
Frequency Range	500 to 3,200 Hz

ADDITIONAL TECHNICAL DATA:

ENVIRONMENTAL LIMITATIONS:

Equipment Operating:

Temperature	Per MIL-STD-169
Elevation	Up to 10,000 feet

Equipment Nonoperating:

Temperature	Per MIL-STD-169
Relative Humidity	Up to 98%.
Elevation	10,000 to 50,000 feet above sea level
Immersion	3 feet of water for 2 hours
Blast	In accordance with SK-N-864

REFERENCE DATA and LITERATURE

MIL-H-11996 (Sig. C).
SC-DL-207906


MANUFACTURER CODE	PART NUMBER
80058	H-60( )/PT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HANDSET

NOMENCLATURE: H-90( )/U

FEDERAL STOCK NO: 5965-644-0334

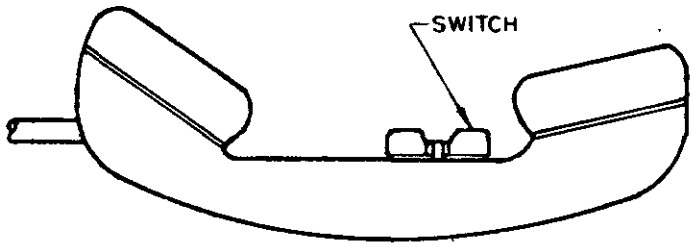

FUNCTIONAL DESCRIPTION:

The H-90( )/U handset is for general use and consists of a standard handset handle complete with a magnetic type earphone element, a carbon type microphone element, receiver and transmitter caps, a push-to-talk switch, and a retractile cord with a U-161 connector. This handset is used with wire and radio communication equipment.

CONSISTS OF:

Handset type: H-90( )/U includes the following:

Switch Assembly, Drawing SC-C-105975
Handle, Handset Assembly, Drawing SC-D-22545
Cord Assembly, Drawing SC-D-60464
Terminal (2) (Brass), Drawing SC-B-105977
Receiver, Drawing SC-B-105976
Transmitter, Drawing SC-B-22556
Cap, Transmitter (Plastic), Drawing SC-C-22547
Cap, Receiver (Plastic), Drawing SC-C-22546
Screw, 100-3 and 100-7
Plug, Connector U-161( )/U, Drawing SC-DL-34036

RELATIONSHIP TO SIMILAR EQUIPMENT:

PHYSICAL DESCRIPTION:

Dimensions (Over-all):

Length	9 inches (228.6 mm)
Depth	3.12 inches (79.25 mm)
Diameter (Receiver and Microphone)	2.61 inches (66.29 mm)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.


ITEM NAME: HANDSET

NOMENCLATURE: H-90( )/U (Cont)

FEDERAL STOCK NO: 5965-644-0334

Cord Data:

Length (Retracted)	11 inches (279.4 mm)
Length (Extended)	48 inches (1219.2 mm)
No. of Conductors	2
Connector Designation	U-161
Weight	Not Rated

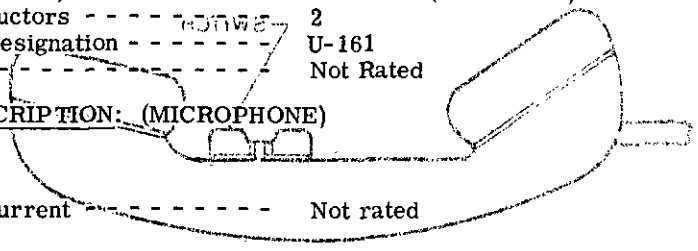

TECHNICAL DESCRIPTION: (MICROPHONE)

INPUT

Operating Current	Not rated

OUTPUT

Nominal Resistance	28 ohms
Frequency Range	Not rated

TECHNICAL DESCRIPTION: (EARPHONE)

INPUT

Quantity of Earphones	1
Nominal Impedance	256 ohms
Frequency Range	Not rated

ADDITIONAL TECHNICAL DATA:

ENVIRONMENTAL LIMITATIONS:

Equipment Operating:

Temperature	-40°F to +150°F
Relative Humidity	Up to 98%

Equipment Nonoperating:

Temperature	-80°F to +160°F
Relative Humidity	Up to 98%
Shock	Impact resistance at 4-foot drop
Vibration	In accordance with Method 201 of MIL-STD-202.

REFERENCE DATA and LITERATURE

MIL-H-13253/5


MANUFACTURER CODE	PART NUMBER
80058	H-90( )/U

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HANDSET

NOMENCLATURE: H-94( )/U

FEDERAL STOCK NO: 5965-164-6632

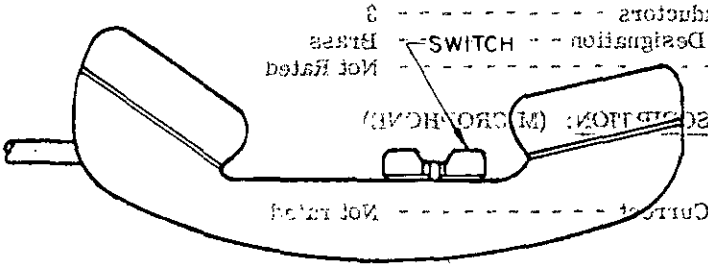

FUNCTIONAL DESCRIPTION:

The H-94( )/U handset is for general use and consists of a standard handset handle with a magnetic type earphone element, a carbon type microphone element, receiver and transmitter caps, a switch, and a straight cord with brass terminals. This handset is used with wire and radio communication equipment.

CONSISTS OF:

Handset type: H-94( )/U

Switch Assembly, Drawing SC-C-105975, Group II
Handle, Handset Assembly, Drawing SC-D-105992
Cord Assembly, CD-494, Drawing SC-DL-76644
Terminal (3) (Brass), Drawing SC-B-105977
Receiver, Drawing SC-B-105976-3
Transmitter, Drawing SC-B-22556
Cap, Transmitter (Plastic), Drawing SC-C-22547
Cap, Receiver (Plastic), Drawing SC-C-22546
Screw (2), 100-3B4-4
Wire, Drawing SC-D-60466-1
Plugs (2) PJ-068 and PJ-055B

RELATIONSHIP TO SIMILAR EQUIPMENT:	MANUFACTURER CODE
PHYSICAL DESCRIPTION: H-94( )/U	80063

Dimensions (Over-all):

Length	9 inches (228.6 mm)
Depth	3.12 inches (79.25 mm)
Diameter (Receiver and Microphone)	2.61 inches (66.29 mm)

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HANDSET

NOMENCLATURE: H-94( )/U (Cont)

FEDERAL STOCK NO: 5965-164-6632

Cord Data:

Length	48 inches (1219.2 mm)
No. of Conductors	3
Connector Designation	Brass
Weight	Not Rated

TECHNICAL DESCRIPTION: (MICROPHONE)

INPUT

Operating Current	Not rated

OUTPUT

Nominal Resistance	28 ohms

TECHNICAL DESCRIPTION: (EARPHONE)

INPUT

Quantity of Earphones	1
Nominal Impedance	3,000 ohms

ADDITIONAL TECHNICAL DATA:

ENVIRONMENTAL LIMITATIONS:

Equipment Operating:

Temperature	-40°F to +150°F
Relative Humidity	98%

Equipment Nonoperating:

Temperature	-80°F to +160°F
Relative Humidity	Up to 100%
Shock	Impact resistance at 4-foot drop
Vibration	In accordance with Method 201 of MIL-STD-202.

REFERENCE DATA and LITERATURE

MIL-H-13253/6


MANUFACTURER CODE	PART NUMBER
80058	H-94( )/U

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HANDSET

NOMENCLATURE: H-111( )/U

FEDERAL STOCK NO: 5965-644-0333

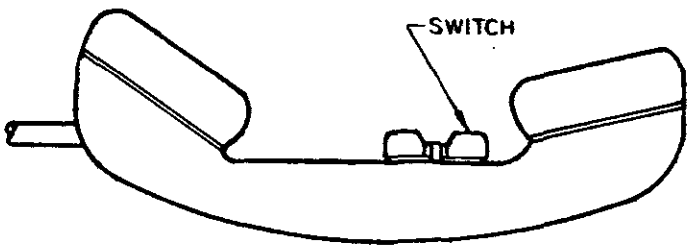

FUNCTIONAL DESCRIPTION:

The H-111( )/U handset is for general use and consists of a standard handset handle with a magnetic type earphone element, a carbon type microphone element, receiver and transmitter caps, a switch and a rectile cord with terminals. This handset is used with wire and radio communication equipment.

CONSISTS OF:

Handset type: H-111( )/U includes the following:

Switch Assembly, Drawing SC-C-105975, Group III
Handle, Handset Assembly, Drawing SC-D-105992, Group I
Cord Assembly, Tinsel, Retractile, Drawing SC-C-101109, Group I
Terminal (2) (Brass), Drawing SC-B-105977
Receiver, Drawing SC-B-105976-2
Transmitter, Drawing SC-B-22556
Cap, Transmitter (Plastic), Drawing SC-C-22547
Cap, Receiver (Plastic), Drawing SC-C-22546
Screw (2), MS-35245-20
Wire, LW22-C-J, Drawing SC-D-16996-1
S-Hook Assembly, Drawing SC-B-14423

RELATIONSHIP TO SIMILAR EQUIPMENT:

PHYSICAL DESCRIPTION:

Dimensions (Over-all):

Length	9 inches (226.6 mm)
Depth	3.12 inches (79.25 mm)
Diameter (Receiver and Microphone)	2.61 inches (66.29 mm)

Source: https://assist.dla.mil -- Downloaded: 202640-26T13:37Z
Check the source to verify that this is the current version before use.


ITEM NAME: HANDSET

NOMENCLATURE: H-111( )/U (Cont)

FEDERAL STOCK NO: 5965-644-0333

Cord Data:

Length (Retracted)	11 inches (279.4 mm)
Length (Extended)	48 inches (1219.2 mm)
No. of Conductors	3
Connector Designation	Terminal type
Weight	Not Rated

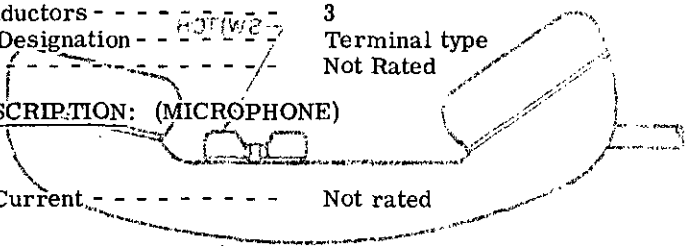

TECHNICAL DESCRIPTION: (MICROPHONE)

INPUT

Operating Current	Not rated

OUTPUT

Nominal Resistance	28 ohms
Frequency Range	Not rated

TECHNICAL DESCRIPTION: (EARPHONE)

INPUT

Quantity of Earphones	1
Nominal Impedance	256 ohms
Frequency Range	Not rated

ADDITIONAL TECHNICAL DATA:

ENVIRONMENTAL LIMITATIONS:

Equipment Operating:

Temperature	-40°F to +150°F
Relative Humidity	Up to 98%

Equipment Nonoperating:

Temperature	-80°F to +160°F
Relative Humidity	Up to 98%
Shock	Impact resistance at 4-foot drop
Vibration	In accordance with Method 201 of MIL-STD-202.

REFERENCE DATA and LITERATURE

MIL-H-13253/7


MANUFACTURER CODE	PART NUMBER
80058	H-111( )/U

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HANDSET

NOMENCLATURE: H-121( )/U

FEDERAL STOCK NO: 5965-642-8997

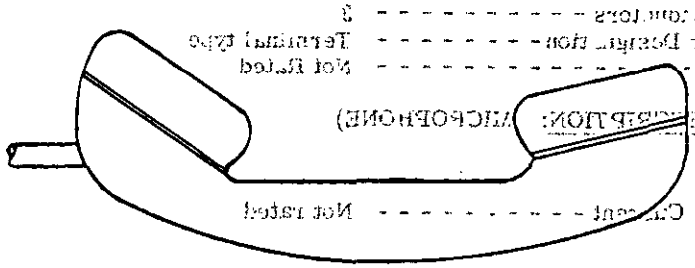

FUNCTIONAL DESCRIPTION:

The H-121( )/U handset is for general use and consists of a standard handset handle with a magnetic type earphone element, a carbon type microphone element, receiver and transmitter caps, and a rectile cord with terminals. This handset is used with wire and radio communication equipment.

CONSISTS OF:

Handset type: H-121( )/U includes the following:

Handle, Handset Assembly, Drawing SC-D-105992, Group I
Cord Assembly, Drawing SC-C-101109, Group I
Terminal, Drawing SC-B-105977
Receiver, Drawing SC-B-105976
Transmitter, Drawing SC-B-22556
Cap, Transmitter (Plastic), Drawing SC-C-22547
Cap, Receiver (Plastic), Drawing SC-C-22546
Screw (2), 100-3B4-3
S-Hook Assembly, Drawing SC-B-14423

RELATIONSHIP TO SIMILAR EQUIPMENT:

PHYSICAL DESCRIPTION:

Dimensions (Over-all):

Length	9 inches (228.6 mm)
Depth	3.12 inches (79.25 mm)
Diameter (Receiver and Microphone)	2.61 inches (66.29 mm).

Source: https://assist.dla.mil -- Downloaded: 202640-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HANDSET

NOMENCLATURE: H-121( )/U (Cont)

FEDERAL STOCK NO: 5965-642-8997

Cord Data:

Length (Retracted)	11 inches (279.4 mm)
Length (Extended)	48 inches (1219.2 mm)
No. of Conductors	3
Connector Designation	Terminal type
Weight	Not Rated

TECHNICAL DESCRIPTION: (MICROPHONE)

INPUT

Operating Current	Not rated

OUTPUT

Nominal Resistance	28 ohms
Frequency Range	Not rated

TECHNICAL DESCRIPTION: (EARPHONE)

INPUT

Quantity of Earphones	1
Nominal Impedance	128 ohms
Frequency Range	Not rated

ADDITIONAL TECHNICAL DATA:

ENVIRONMENTAL LIMITATIONS:

Equipment Operating:

Temperature	-40°F to +150°F
Relative Humidity	98%

Equipment Nonoperating:

Temperature	-80°F to +160°F
Relative Humidity	Up to 100%
Shock	Impact resistance at 4-foot drop
Vibration	In accordance with Method 201 of MIL-STD-202.

REFERENCE DATA and LITERATURE

MIL-H-13253/8


MANUFACTURER CODE	PART NUMBER
80058	H-121( )/U

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HANDSET

NOMENCLATURE: H-138( )/U

FEDERAL STOCK NO: 5965-892-0972

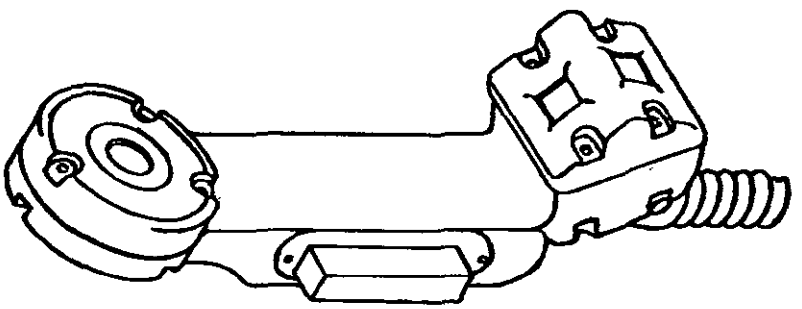

FUNCTIONAL DESCRIPTION:

Handset H-138( )/U is for general purpose use. It is an operating component of AN/PRC-25( ) and AN/GRC-125. The handset has a noise cancelling microphone.

CONSISTS OF:

1 Handset H-138/U
Handset Assembly - SM-D-448301
Including
1 Plug Connector - U-182( )/U
1 Telephone Receiver Element - Earphone Assembly - SM-B-448332
1 Telephone Transmitter - SM-C-448366
1 Switch Assembly SM-C-448305
1 Cable and Connector Assembly - SM-C-448460
1 Transformer Assembly - SM-B-448318

RELATIONSHIP TO SIMILAR EQUIPMENT:

H-207( )/VRC and H-138( )/U are similar.

Source: https://assist.dla.mil -- Downloaded: 202640-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HANDSET

NOMENCLATURE: H-138( )/U (Cont)

FEDERAL STOCK NO: 5965-892-0972


PHYSICAL DESCRIPTION:

Dimensions: (Over-all)

Length	8.5 inches (204.47 mm) approximately
Depth	2.3 inches (51.56 mm) approximately
Width	2.4 inches (51.82 mm)
Weight	Not rated

Cord Data:

Length (Retracted)	*14 inches*
No. of Conductors	5
Connector Type	Plug

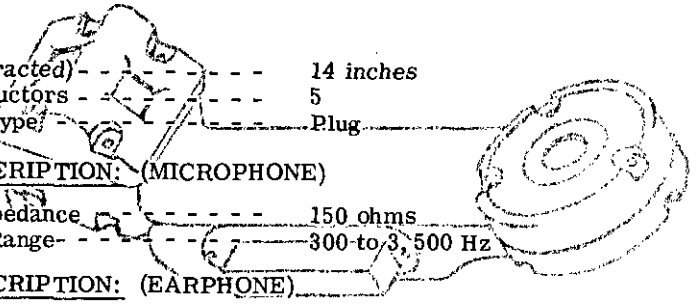

TECHNICAL DESCRIPTION: (MICROPHONE)

Nominal Impedance	150 ohms
Frequency Range	300 to 3,500 Hz

TECHNICAL DESCRIPTION: (EARPHONE)

Quantity of Earphones	1
Nominal Impedance	1,000 ohms
Frequency Range	500 to 3,500 Hz

ENVIRONMENTAL LIMITATIONS:

Equipment Operating:

Elevation	Up to 15,000 feet above sea level.
Relative Humidity	Up to 97 percent.

Equipment Nonoperating:

Temperature	MIL-STD-169
Elevation	Up to 50,000 feet above sea level.
Relative Humidity	Up to 100 percent including condensation resulting from temperature changes.
Immersion	3 feet of water for 2 hours.
Salt Spray	Method 101, MIL-STD-202.
Drop, Shock	Withstands at least 6 drops from 6-foot height onto a concrete floor.
Blast	SK-N-864 (5 inch Naval gun).
Vibration	In accordance with Method 201, MIL-STD-202.
Bounce	3 hours on package tester.

REFERENCE DATA and LITERATURE

MIL-E-55119
SC-DL-448-301


MANUFACTURER CODE	PART NUMBER
80058	H-138( )/U

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HANDSET

NOMENCLATURE: H-156( )/U

FEDERAL STOCK NO: 5965-892-3850

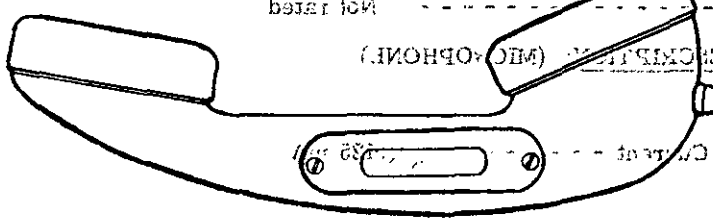

FUNCTIONAL DESCRIPTION:

Handset H-156( )/U is intended for use with wire communication equipment. The unit is waterproof and withstands severe environmental conditions. This handset is therefore suitable for outdoor use. It is used as part of AN/GRC-50-A(V)1 through 5, AN/TRC-143; part of AN/GRC-67( ) and -68.

CONSISTS OF:

1 Handset H-156( )/U
Including:
1 Transmitter Element TA-117( )/PT
1 Receiver Element TA-235( )/PT
1 Switch Assembly SA-129( )/PT
1 Handle Assembly Drawing SC-D-76454
1 Cord Assembly Drawing SC-D-76457

RELATIONSHIP TO SIMILAR EQUIPMENT:

Handsets H-60( )/PT, H-156( )/U, and H-165( )/U have the same electrical and mechanical construction except the cord assemblies are different.

PHYSICAL DESCRIPTION:

Dimensions (Over-all):

Length	8.44 inches (214.38 mm)
Depth	2.80 inches (71.12 mm)
Receiver Diameter	2.56 inches (65.02 mm)
Transmitter Diameter	2.59 inches (65.79 mm)

Source: https://assist.dla.mil -- Downloaded: 202640-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HANDSET

NOMENCLATURE: H-156( )/U (Cont)

FEDERAL STOCK NO: 5965-892-3850

Cord Data:

Length (Retracted)	12 inches (304.8 mm)
Length (Extended)	48 inches (1219.2 mm) (approximately)
No. of Conductors	4
Connector Designation	Pin type
Weight	Not rated

TECHNICAL DESCRIPTION: (MICROPHONE)

INPUT

Operating Current	125 mA

OUTPUT

Nominal Resistance	35 ohms
Frequency Range	500 to 4, 000 Hz

TECHNICAL DESCRIPTION: (EARPHONE)

INPUT

Quantity of Earphones	1
Nominal Impedance	150 ohms
Frequency Range	500 to 3, 200 Hz

ADDITIONAL TECHNICAL DATA:

ENVIRONMENTAL LIMITATIONS:

Equipment Operating:

Temperature	Per MIL-STD-169
Elevation	Up to 10, 000 feet

Equipment Nonoperating:

Temperature	Per MIL-STD-169
Relative Humidity	Up to 98%
Elevation	10, 000 to 50, 000 feet above sea level
Immersion	3 feet of water for 2 hours
Blast	In accordance with SK-N-864

REFERENCE DATA and LITERATURE

MIL-H-11996
SC-DL-76453


MANUFACTURER CODE	PART NUMBER
80058	H-156( )/U

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HANDSET

NOMENCLATURE: H-165( )/U

FEDERAL STOCK NO: 5965-543-1837

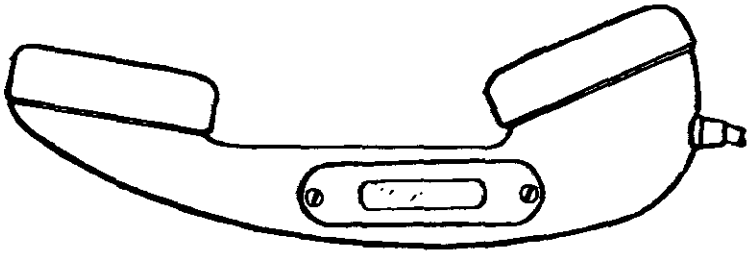

FUNCTIONAL DESCRIPTION:

Handset H-165( )/U is intended for use with wire communication equipment. The unit is waterproof and withstands severe environmental conditions. This handset is therefore suitable for outdoor use. It is used as part of C-1632/VIA-4 which is a component of AN/VIA-4, AN/MTC-3( ).

CONSISTS OF:

1 Handset H-165( )/U
Including:
1 Transmitter - TA-117( )/PT
1 Receiver Element TA-235( )/PT
1 Switch Assembly SA129( )/PT
1 Handle Assembly Drawing No. SC-D-55380
1 Cord Assembly CX4533( )/U

RELATIONSHIP TO SIMILAR EQUIPMENT:

Handsets H-60( )/PT, H-156( )/U, and H-165( )/U have the same electrical and mechanical construction except the cord assemblies are different.

PHYSICAL DESCRIPTION:

Dimensions (Over-all):

Length	8.47 inches (215.14 mm)
Depth	2.73 inches (69.34 mm)
Receiver Diameter	2.56 inches (65.02 mm)
Transmitter Diameter	2.59 inches (65.79 mm)

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:37Z
Check the source to verify that this is the current version before use.


ITEM NAME: HANDSET

NOMENCLATURE: H-165( )/U (Cont)

FEDERAL STOCK NO: 5965-543-1837

Cord Data:

Length (Retracted)	11 inches (279.4 mm) (approximately)
Length (Extended)	48 inches (1219.2 mm) (approximately)
No. of Conductors	4
Connector Designation	Pin type
Weight	Not rated

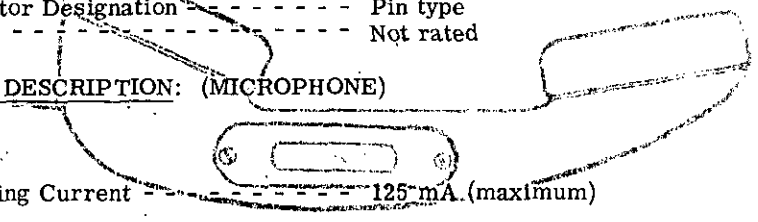

TECHNICAL DESCRIPTION: (MICROPHONE)

INPUT

Operating Current	125 mA (maximum)

OUTPUT

Nominal Resistance	35 ohms
Frequency Range	500 to 4,000 Hz

TECHNICAL DESCRIPTION: (EARPHONE)

INPUT

Quantity of Earphones	1
Nominal Impedance	150 ohms
Frequency Range	500 to 3,200 Hz

ADDITIONAL TECHNICAL DATA:

ENVIRONMENTAL LIMITATIONS:

Equipment Operating:

Temperature	Per MIL-STD-169
Elevation	Up to 10,000 feet

Equipment Nonoperating:

Temperature	Per MIL-STD-169
Relative Humidity	Up to 98%
Elevation	10,000 to 50,000 feet above sea level
Immersion	3 feet of water for 2 hours
Blast	In accordance with SK-N-864

REFERENCE DATA and LITERATURE

MIL-E-11996A
SC-DL-55379


MANUFACTURER CODE	PART NUMBER
80058	H-165( )/U

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HANDSET

NOMENCLATURE: H-169/U

FEDERAL STOCK NO: 5965-679-9501

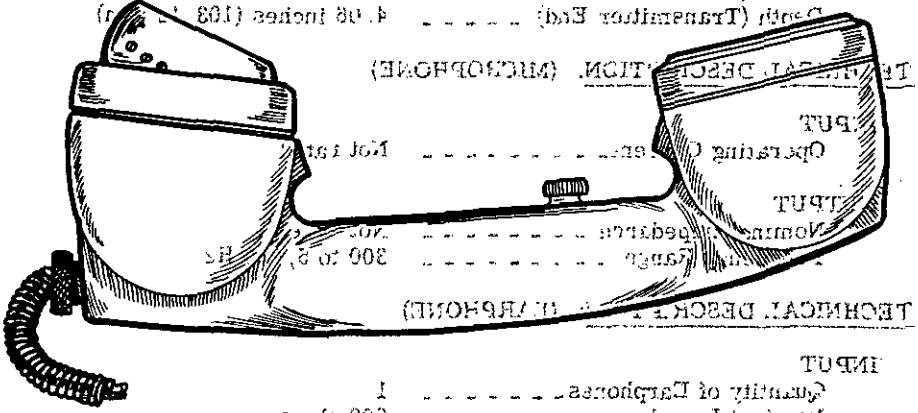

FUNCTIONAL DESCRIPTION:

This unit is a noise cancelling type handset containing a magnetic earphone element and a microphone with a transistorized amplifier. The handset is suitable for general use in telephone circuits.

The handset is battery powered.

CONSISTS OF:

1	Microphone Amplifier N5965-624-4134
1	Mouthpiece
1	Receiver Element N5965-678-5305
1	Receiver Cap N5965-683-2075
1	Handset Handle (MIL-M-19833, GDI-30 or MIL-M-22544, Type 4).
1	Cord Protector Assembly
1	Cord Assembly CX-1846( )/U.
1	Switch Soft Action 3 Pole Shorting

RELATIONSHIP TO SIMILAR EQUIPMENT:

Similar to NT-51007A

MANUFACTURER CODE	PART NUMBER
80058	H-169/U

Source: https://assist.dla.mil -- Downloaded: 202640-26T13:37Z
Check the source to verify that this is the currentversion before use.

ITEM NAME: HANDSET

NOMENCLATURE: H-169/U (Cont)

FEDERAL STOCK NO: 5965-679-9501

PHYSICAL DESCRIPTION:

Dimensions (Overall):

Length	9.05 inches (229.87 mm)
Width (Transmitter End)	2.72 inches (69.09 mm)
Depth (Transmitter End)	4.06 inches (103.12 mm)

TECHNICAL DESCRIPTION: (MICROPHONE)

INPUT

Operating Current	Not rated

OUTPUT

Nominal Impedance	Not rated
Frequency Range	300 to 5,000 Hz

TECHNICAL DESCRIPTION: (EARPHONE)

INPUT

Quantity of Earphones	1
Nominal Impedance	600 ohms
Frequency Range	200 to 5,000 Hz

ADDITIONAL TECHNICAL DATA:

Microphone Amplifier Type	Dynamic Noise Cancelling
Receiver Element Type	Magnetic
Switch Type	Push-to-talk

REFERENCE DATA and LITERATURE

Navy Dwg RE-51 128E
Cable Assembly, Drawing Navy RE-49C 605
Receiver, MIL-E-17884
Microphone, MIL-M-23813 and MIL-M-5794


MANUFACTURER CODE	PART NUMBER
80058	H-169/U

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HANDSET

NOMENCLATURE: H-203/U

FEDERAL STOCK NO: 5965-840-8849

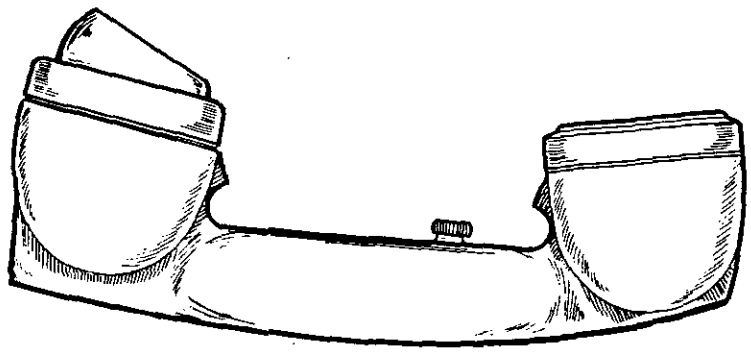

FUNCTIONAL DESCRIPTION:

The H-203/U is a sound powered receiver-transmitter employing magnet earphone and microphone elements. This handset is suitable for general use in telephone circuits.

CONSISTS OF:

1	Microphone Element	U. S. Instrument Corp. Part No. UA1614-1
1	Receiver Element	U. S. Instrument Corp. Part No. UA1614-1
1	Handset Handle	U.S.I.C. Part No. 974-2
1	Cord	U.S.I.C. Part No. UA2467-2
1	Pushbutton Switch	U.S.I.C. Part No. UA2175-1

RELATIONSHIP TO SIMILAR EQUIPMENT:

PHYSICAL DESCRIPTION:

Weight - - - - - - - - - - - - - - - - - Not available

Dimensions:

Length - - - - - - - - - - - - - - - - 9 inches (228.6 mm)
Width - - - - - - - - - - - - - - - - - 2.31 inches (58.67 mm)
Depth - - - - - - - - - - - - - - - - - 4.13 inches (104.90 mm)

ADDITIONAL PHYSICAL DATA:

Cord Data:

Length, Retracted - - - - - - - - - 1 foot (304.8 mm)
Length, Extended (Approximate) - - 6 feet (1,228.8 mm)
No. of Conductors - - - - - - - - - 2
No. of Connectors - - - - - - - - - 2
Connector Type - - - - - - - - - - - Lug type

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HANDSET

NOMENCLATURE: H-203/U (Cont)

FEDERAL STOCK NO. 5965-840-8849

TECHNICAL DESCRIPTION: (MICROPHONE)

OUTPUT

DC Resistance	90 ohms
AC Impedance	1,690 ohms
Frequency Range	500 to 2,500 Hz
Frequency of Maximum Response	Approximately 1,700 Hz

TECHNICAL DESCRIPTION: (EARPHONE)

INPUT

DC Resistance	60 ohms
AC Impedance	1,150 ohms
Frequency Range	500 to 2,500 Hz

REFERENCE DATA and LITERATURE

U. S. Instrument Corp. Drawing, Sound Powered Handset Type H-203/U
U. S. Instrument Corp. Data Sheet D657-1


MANUFACTURER CODE	PART NUMBER
80058	H-203/U

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HANDSET

NOMENCLATURE: H-207( )/VRC

FEDERAL STOCK NO: 5965-686-7067

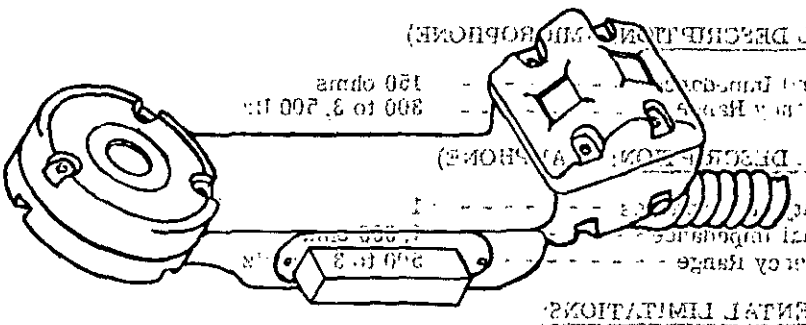

FUNCTIONAL DESCRIPTION:

Handset H-207( )/VRC is a part of AN/VRC-12 and AN/VRC-43( ) through -49( ). The microphone is dynamic and noise cancelling.

CONSISTS OF:

1 Handset H-207( )/VRC
Including:
1 Microphone Element SM-B-415649
1 Receiver Element SM-B-415588
1 Switch Assembly SM-C-448305
1 Handle Assembly Drawing No. See SC-DL-415575
1 Cable Assembly SM-D-415653

RELATIONSHIP TO SIMILAR EQUIPMENT:

PHYSICAL DESCRIPTION:

Dimensions (Over-all):

Length	8.4 inches (204.22 mm)
Depth	2.7 inches (52.58 mm)
Width	2.4 inches (51.82 mm)

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HANDSET

NOMENCLATURE: H-207( )/VRC (Cont)

FEDERAL STOCK NO: 5965-686-7067

Cord Data:

Length (Retracted)	53 inches (1,346.2 mm)
Length (Extended)	20 feet (3,657.6 mm)
No. of Conductors	5
Connector Designation	Terminal type
Weight	Not rated

TECHNICAL DESCRIPTION: (MICROPHONE)

Nominal Impedance	150 ohms
Frequency Range	300 to 3,500 Hz

TECHNICAL DESCRIPTION: (EARPHONE)

Quantity of Earphones	1
Nominal Impedance	1,000 ohms
Frequency Range	500 to 3,500 Hz

ENVIRONMENTAL LIMITATIONS:

Equipment Operating:

Elevation	Up to 15,000 feet above sea level.
Relative Humidity	Up to 97 percent.

Equipment Nonoperating:

Temperature	MIL-STD-169.
Elevation	Up to 50,000 feet above sea level.
Relative Humidity	Up to 100 percent including condensation resulting from temperature changes.
Immersion	3 feet of water for 2 hours.
Salt Spray	Method 101, MIL-STD-202.
Drop, Shock	Withstands at least 6 drops from 6-foot height onto a concrete floor.
Vibration	In accordance with Method 201, MIL-STD-202.
Blast	In accordance with SK-N-864 (5-inch Naval gun)
Bounce	3 hours on package tester.

REFERENCE DATA and LITERATURE

SC-DL-415575
MIL-E-55119


MANUFACTURER CODE	PART NUMBER
80058	H-207( )/VRC

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HANDSET

NOMENCLATURE: H-250/U

FEDERAL STOCK NO: 5965-043-3463

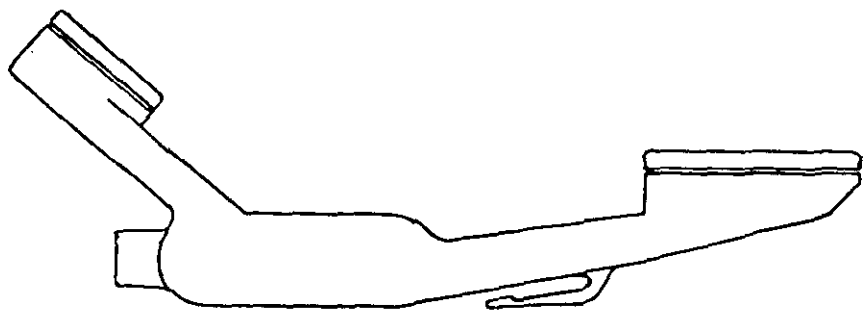

FUNCTIONAL DESCRIPTION:

Handset H-250( )/U is a miniature light-weight handset consisting of a dynamic moving-coil microphone and earphone, a push-to-talk switch, a 6-foot long retractile cord terminated with Connector, Plug U-182B/U and handle. The assembled handset is blast proof and immersion proof. The earphone end of the assembled handset when in use does not interfere with the wearing of Infantryman Helmet M-1. A clip molded integrally with the handle is provided for securing the unit to the carrying harness straps, or to the operator's pocket.

CONSISTS OF:

1 Handset H-250/U
Including:
SEE FUNCTIONAL DESCRIPTION

RELATIONSHIP TO SIMILAR EQUIPMENT:

PHYSICAL DESCRIPTION:

Dimensions: (Over-all)

Length	7.5 inches (179.07 mm)
Depth	Not rated
Width	Not rated
Weight	235 grams (maximum)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HANDSET
NOMENCLATURE: H-250/U (Cont)
FEDERAL STOCK NO: 5965-043-3463

Cord Data:

SEE FUNCTIONAL DESCRIPTION

TECHNICAL DESCRIPTION: (MICROPHONE)


OUTPUT

Nominal Impedance	150 ohms
Frequency Range	300 to 3, 500 Hz

TECHNICAL DESCRIPTION: (EARPHONE)

INPUT

Quantity of Earphones	1
Nominal Impedance	1, 000 ohms
Frequency Range	20 to 3, 500 Hz

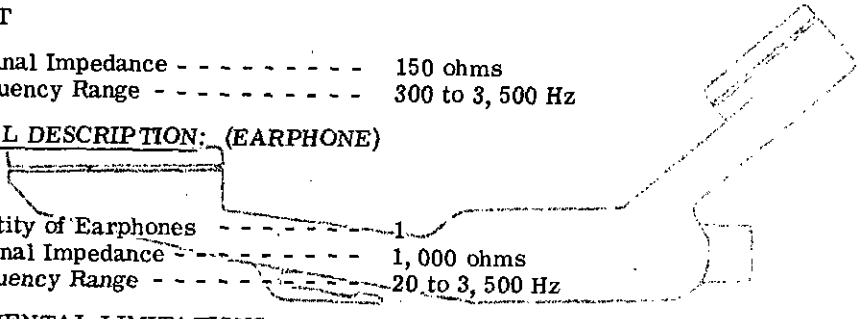

ENVIRONMENTAL LIMITATIONS:

Equipment Operating:

Temperature	-40°F to +120°F plus solar radiation.
Elevation	Up to 10, 000 feet above sea level.
Relative Humidity	Up to 95 percent.
Sand and dust	As encountered in the desert.

Equipment Nonoperating:

Temperature	-65°F to +155°F
Elevation	Up to 50, 000 feet above sea level.
Relative Humidity	94 ±4% at 86°F.
Immersion	3 feet of water for 2 hours.
Salt fog	5% solution
Drop	Withstands at least 12 drops from 6-foot height onto a concrete floor faced with 1/8" asphalt tile.
Blast	SK-N-864 (Naval 5" Gun).
Vibration	Method 201, MIL-STD-202.
Bounce	Method 514, Procedure XI, Part 2 of MIL-STD-810.
Fungus	Method 508, Procedure I of MIL-STD-810.

REFERENCE DATA and LITERATURE

MIL-H-55692(EL)


MANUFACTURER CODE	PART NUMBER
80058	H-250/U

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HANDSET

NOMENCLATURE: TS-9( )

FEDERAL STOCK NO: 5965-170-6473

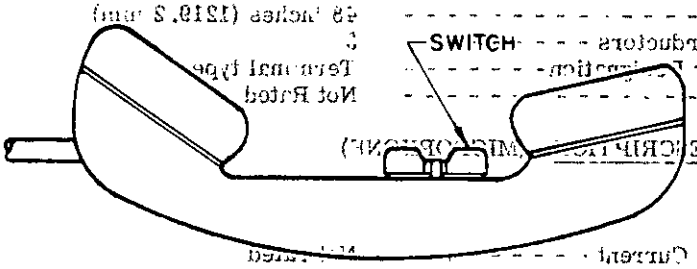

FUNCTIONAL DESCRIPTION:

The TS-9( ) handset is for general use. It consists of a standard handset handle complete with a magnetic type earphone element, a carbon type microphone element, receiver and transmitter caps, a switch, and a straight cord with terminals. This handset is used with wire and radio communication equipment.

CONSISTS OF:

Handset type: TS-9( ) includes the following:
- Switch Assembly, Drawing SC-C-105975, Group III
- Handle, Handset Assembly, Drawing SC-D-105992
- Cord Assembly CC-333, Drawing SC-D-1041
- Terminal (2) (Brass), Drawing SC-B-105977
- Receiver, Drawing SC-B-105976-2
- Transmitter, Drawing SC-B-22556
- Cap, Transmitter (Plastic), Drawing SC-C-22547
- Cap, Receiver (Plastic), Drawing SC-C-22546
- Screw (2), 100-3B4-4
- Wire, LW22-C-J, Drawing SC-D-1054-1

RELATIONSHIP TO SIMILAR EQUIPMENT:

PHYSICAL DESCRIPTION:

Dimensions (Over-all):

Length	9 inches (228.6 mm)
Depth	3.12 inches (79.25 mm)
Diameter (Receiver and Microphone)	2.61 inches (66.29 mm)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HANDSET

NOMENCLATURE: TS-9( ) (Cont)

FEDERAL STOCK NO: 5965-170-6473

Cord Data:

Length	48 inches (1219.2 mm)
No. of Conductors	3
Connector Designation	Terminal type
Weight	Not Rated

TECHNICAL DESCRIPTION: (MICROPHONE)

INPUT

Operating Current	Not rated

OUTPUT

Nominal Resistance	28 ohms
Frequency Range	Not rated

TECHNICAL DESCRIPTION: (EARPHONE)

INPUT

Quantity of Earphones	1
Nominal Impedance	256 ohms
Frequency Range	Not rated

ADDITIONAL TECHNICAL DATA:

ENVIRONMENTAL LIMITATIONS:

Equipment Operating:

Temperature	-40°F to +150°F
Relative Humidity	Up to 98%

Equipment Nonoperating:

Temperature	-80°F to +160°F
Relative Humidity	Up to 98%
Shock	Impact resistance at 4-foot drop
Vibration	In accordance with Method 201 of MIL-STD-202.

REFERENCE DATA and LITERATURE

MIL-H-13253/1


MANUFACTURER CODE	PART NUMBER
80058	TS-9( )

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HANDSET

NOMENCLATURE: NT-51007A

FEDERAL STOCK NO: 5965-665-3480

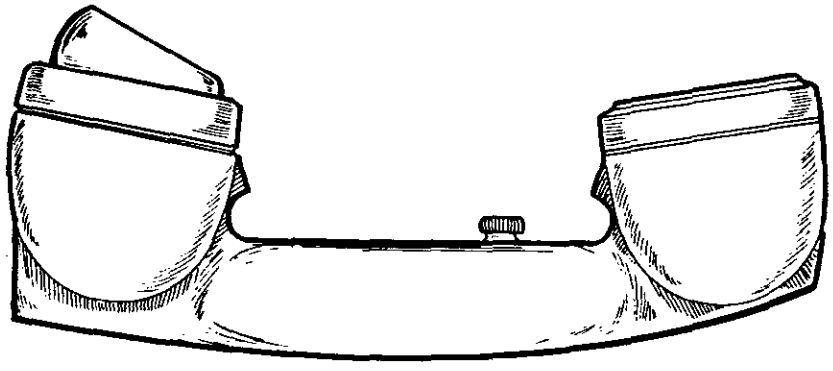

FUNCTIONAL DESCRIPTION:

Handset NT-51007A is a heavy duty, battery powered handset intended for general purpose use. The handset contains a carbon microphone and a magnetic type earphone receiver housed in a phenolic case.

CONSISTS OF:

1 Handset Body
1 Transmitter Unit Roanwell No. 10118 or equal
1 Receiver Unit Roanwell No. 10088 or equal
1 Switch Roanwell No. 10060 or equal
1 Cord Protector Assembly Roanwell No. 17290 or equal

RELATIONSHIP TO SIMILAR EQUIPMENT:

This handset is similar to Roanwell Part No. 10230 handset, except that the Roanwell handset has a 5 conductor rubber covered coil cord terminated in AN-3106-14S-5P Plug.

This is H-169 handset with a carbon microphone and a different cord.

PHYSICAL DESCRIPTION:

Dimensions: (Over-all)

Length	9.05 inches (229.87 mm)
Depth	4.06 inches (103.12 mm)
Diameter (Transmitter and Receiver)	2.50 inches (63.50 mm)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: HANDSET

NOMENCLATURE: NT-51007A (Cont)

FEDERAL STOCK NO: 5965-665-3480

TECHNICAL DESCRIPTION: (MICROPHONE)

INPUT

Operating Current _ _ _ _ _ _ _ _ Not rated

OUTPUT

Nominal Impedance _ _ _ _ _ _ _ 35 ohms
Frequency Range _ _ _ _ _ _ _ _ Not rated

TECHNICAL DESCRIPTION: (EARPHONE)

INPUT

Quantity of Earphones _ _ _ _ _ _ 1
Nominal Impedance _ _ _ _ _ _ _ 600 ohms
Frequency Range _ _ _ _ _ _ _ _ Not rated

ADDITIONAL TECHNICAL DATA:

REFERENCE DATA and LITERATURE:

Roanwell Corporation Data Sheet DS-38
Roanwell Corporation Drawing 10044/SPEC
NAVY Drawing RE 51D 121G

MANUFACTURER CODE	PART NUMBER
80064 82872	NT-51007A 10044

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:37Z
Check the source to verify that this is the current version before use.

SECTION 8
MICROPHONES

Nomenclature, model or part number	Page
M-11( )/U	8.2.1
M-23( )/U	8.3.1
M-24( )/U	8.4.1
M-31( )/U	8.5.1
M-35( )/U	8.6.1
M-56( )/G	8.7.1
M-65( )/U	8.8.1
M-80C/U	8.9.1
M-87/AIC	8.10.1
M-92C/U	8.11.1
M-94A/A	8.12.1
M-100/AIC	8.13.1
M-101/AIC	8.14.1
M-102/AIC	8.15.1
M-103/AIC	8.16.1
M-110/U	8.17.1
M-133( )/U	8.18.1

Source: https://assist.dla.mil -- Downloaded: 202640-26T13:37Z
Check the source to verify that this is the currentversion before use.

ITEM NAME: MICROPHONE

NOMENCLATURE: M-11( )/U

FEDERAL STOCK NO: 5965-170-4832

NO ILLUSTRATION AVAILABLE
NOT RECOMMENDED FOR NEW EQUIPMENT

FUNCTIONAL DESCRIPTION:

Dynamic, semi-directional, bushing-mounted, stand type with cable and connector. This microphone for fixed plant use. The stand is adjustable.

CONSISTS OF:

1 Microphone M-11( )/U

RELATIONSHIP TO SIMILAR EQUIPMENT:

Similar to Army-Navy microphone M-10/FI A-1 except it is a floor stand type.

PHYSICAL DESCRIPTION:

Weight	Not rated.
Dimensions (Over-all):	
Length	4.0 inches (101.6 mm)
Diameter (Base)	2.0 inches (50.8 mm)
Height	70.0 inches (1,778 mm)
Stand	5.5 feet (1,676.4 mm)
Cable Data:	
Length	2.5 feet (635 mm)
Termination	Hubbelock #23005 Plug Cap.

ADDITIONAL PHYSICAL DATA:

TECHNICAL DESCRIPTION:

OUTPUT	
Nominal Impedance	20 ohms
Frequency Range	40 to 10,000 Hz.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: MICROPHONE

NOMENCLATURE: M-11( )/U (Cont)

FEDERAL STOCK NO: 5965-170-4832

ADDITIONAL TECHNICAL DATA:

Stand - Telescopic to approx. 5.5 feet high
Stand mounting - - - - - - - - - - - - - - - - - .625-27 *UNS-2A thread swivel joint.*

REFERENCE DATA and LITERATURE

MANUFACTURER CODE	PART NUMBER
80058	M-11( )/U
64294	S6459
05614	41550-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: MICROPHONE

NOMENCLATURE: M-23( )/U

FEDERAL STOCK NO: 5965-170-4794

NO ILLUSTRATION AVAILABLE
NOT RECOMMENDED FOR NEW EQUIPMENT

FUNCTIONAL DESCRIPTION:

Picks up sound waves when reproducing equipment MC-364-D is used as a public address system or as a mixer for superimposing speech or music on a recorded background. The microphone is unidirectional, bushing mounted stand type with cable and connector.

CONSISTS OF:

1 Microphone, M-23( )/U

RELATIONSHIP TO SIMILAR EQUIPMENT:

P/O Sig C reproducing equipment MC-364-D. Microphone is used with but not a part of turntable MX-932( )/U.

PHYSICAL DESCRIPTION:

Microphone Type	Dynamic
Dimensions (Over-all):	
Length	4 inches (101.6 mm) (Encl Microphone MTG)
Diameter	2.0 inches (50.8 mm)
Height	4.0 inches (101.6 mm)
Weight	2-1/2 ounces maximum.

ADDITIONAL PHYSICAL DATA:

Cable Data:	
Length (Extended)	12.5 feet (3,810 mm)
Termination	Amphenol #80 PC2M
Bushing Mounted	.625-27 UNS-2A thread

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: MICROPHONE

NOMENCLATURE: M-23( )/U (Cont)

FEDERAL STOCK NO: 5965-170-4794

TECHNICAL DESCRIPTION:

INPUT
Operating Current - - - - - - - - - - - - Not applicable
Polarizing Voltage - - - - - - - - - - - - Not rated

OUTPUT
Nominal Impedance - - - - - - - - - - - - 40 ohms
Frequency Range - - - - - - - - - - - - - 70 to 9,000 Hz

ADDITIONAL TECHNICAL DATA:

-88 dB below -1 volt per bar output

REFERENCE DATA and LITERATURE

US Army 71-2431
MIL-P-12953

MANUFACTURER CODE	PART NUMBER
80058	M-23( )/U

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: MICROPHONE

NOMENCLATURE: M-24( )/U

FEDERAL STOCK NO: 5965-162-8287

NO ILLUSTRATION AVAILABLE

FUNCTIONAL DESCRIPTION:

The M-24( )/U is a desk type microphone that is used with stand public address systems.

CONSISTS OF:

1 Microphone, M-24( )/U
1 Desk Stand
1 Cord W/Connector

RELATIONSHIP TO SIMILAR EQUIPMENT:

Microphone is used with but is not a part of amplifier AM-92( )/TI.

PHYSICAL DESCRIPTION:

Microphone Type-	Dynamic
Dimensions (Over-all):	
Length	5.0 inches (127.0 mm)
Width	3.5 inches (88.90 mm)
Height	2.5 inches (63.50 mm)
Weight	2-1/2 ounces maximum

ADDITIONAL PHYSICAL DATA:

Cable Data:

Length (Extended)	25 feet (7,620 mm)
Number of Conductors	2
Shielding	Shielded
Impedance	3 ohms
Termination	Amphenol #75-MC1F (connector at each end)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: MICROPHONE

NOMENCLATURE: M-24( )/U (Cont)

FEDERAL STOCK NO: 5965-162-8287

TECHNICAL DESCRIPTION:

INPUT
Operating Current - - - - - - - - - - - - Not applicable
Polarizing Voltage - - - - - - - - - - - - Not rated

OUTPUT
Nominal Impedance - - - - - - - - - - - - 50, 000 to 100, 000 ohms
Frequency Range - - - - - - - - - - - - 40 to 8, 000 Hz

ADDITIONAL TECHNICAL DATA:

Microphone unit mounts on stand.
Stand threads - - - - - - - - - - - - - - - - .625-27 UNS-2A thread
Microphone has locking slide which shorts microphone in "off" position.

REFERENCE DATA and LITERATURE

MANUFACTURER CODE	PART NUMBER
80058	M-24( )/U

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: MICROPHONE

NOMENCLATURE: M-31( )/U

FEDERAL STOCK NO: 5965-013-7560

NO ILLUSTRATION AVAILABLE

FUNCTIONAL DESCRIPTION:

This microphone is for field or tactical use. This is a capacitor type, Hi-Fi microphone which is used with an amplifier for high quality sound transmission.

CONSISTS OF:

1 Microphone, M-31( )/U

RELATIONSHIP TO SIMILAR EQUIPMENT:

Microphone is used with but not a part of Western Electric amplifier RA-1095.

PHYSICAL DESCRIPTION:

Microphone Type - - - - - - - - - - - - - - - Dynamic
Dimensions (Over-all):
Length - 1 inch (25.4 mm)
Width - 1 inch diameter (25.4 mm)
Height - 1 inch (25.4 mm)

ADDITIONAL PHYSICAL DATA:

TECHNICAL DESCRIPTION:

INPUT
Operating Current - - - - - - - - - - - - - Not applicable
Polarizing Voltage - - - - - - - - - - - - - 200 volts

OUTPUT
Nominal Impedance - - - - - - - - - - - - Not rated
Frequency Range - - - - - - - - - - - - - 50 to 6,000 Hz

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: MICROPHONE

NOMENCLATURE: M-31( )/U (Cont)

FEDERAL STOCK NO: 5965-013-7560

ADDITIONAL TECHNICAL DATA:

Microphone is omni-directional when the diaphragm is located in a horizonal plane.

REFERENCE DATA and LITERATURE

MANUFACTURER CODE	PART NUMBER
80058	M-31( )/U

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: MICROPHONE

NOMENCLATURE: M-35( )/U

FEDERAL STOCK NO: 5965-296-2686



FUNCTIONAL DESCRIPTION:

Carbon microphone element used in handsets

CONSISTS OF:

1 Microphone element, M-35( )/U

RELATIONSHIP TO SIMILAR EQUIPMENT:

Used in handset M-33( )/PT

PHYSICAL DESCRIPTION:

Dimensions:

Diameter	1.2 inches (25.91 mm)
Depth	0.375 inch (9.53 mm)

TECHNICAL DESCRIPTION:

INPUT

Operating Current	0.075 amperes
Polarizing Voltage	1.2 volts

OUTPUT

Nominal Impedance	40 ohms
Frequency Range	300 to 4,000 Hz

Source: https://assist.dla.mil -- Downloaded: 202640-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: MICROPHONE

NOMENCLATURE: M-35( )/U (Cont)

FEDERAL STOCK NO: 5965-296-2686

ADDITIONAL TECHNICAL DATA:

Termination	2 spring contact surfaces
Environmental Data:	
Equipment Operating:	
Temperature	-40° to +150°F
Elevation	Up to 10,000 feet above sea level
Relative Humidity	Up to 98 percent
Equipment Nonoperating:	
Temperature	72 hrs @ 185°F and -80°F
Elevation	Up to 50,000 feet above sea level
Relative Humidity	Up to 100 percent
Vibration	1/16 inch, 5 hours, 10 to 55 cycles per sec., each min.
Blast	MIL-M-11095 (9.5 lb_f/in^2)

REFERENCE DATA and LITERATURE

MIL-C-61800
MIL-M-11095 (Sig C).


MANUFACTURER CODE	PART NUMBER
80058 82872	M-35( )/U 14610

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: MICROPHONE

NOMENCLATURE: M-56( )/G

FEDERAL STOCK NO: 5965-524-5520

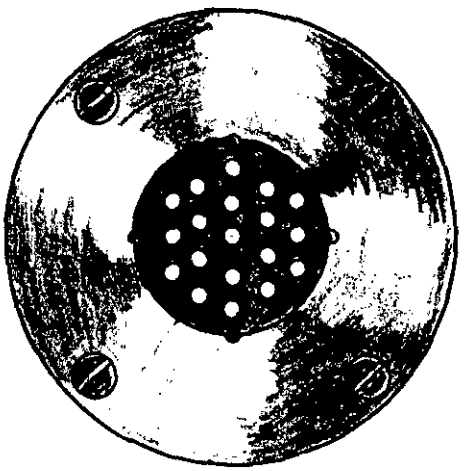

FUNCTIONAL DESCRIPTION:

Microphone element is used to pick up speech from launcher section for transmission to its associated launcher loaders. Microphone is unidirectional dynamic type.

CONSISTS OF:

1 Microphone, M-56( )/G.

RELATIONSHIP TO SIMILAR EQUIPMENT:

Part of launcher section control cabinet of NIKE I Guided Missile Battery.

PHYSICAL DESCRIPTION:

Microphone Type - - - - - - - - - - - - - - - Dynamic
Dimensions (Over-all):
Diameter - - - - - - - - - - - - - - - - - - - 3.25 inches (82.55 mm)
Height- 1.4 inches (35.56 mm)

Weight - 2-1/2 ounces maximum

ADDITIONAL PHYSICAL DATA:

Cable Data: - - - - - - - - - - - - - - - - - - No cable

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: MICROPHONE

NOMENCLATURE: M-56( )/G (Cont)

FEDERAL STOCK NO: 5965-524-5520

TECHNICAL DESCRIPTION:

INPUT
Operating Current - - - - - - - - - - - - Not applicable
Polarizing Voltage - - - - - - - - - - - - Not rated

OUTPUT
Nominal Impedance - - - - - - - - - - - - Not rated
Frequency Range - - - - - - - - - - - - 600 to 33,000 Hz

ADDITIONAL TECHNICAL DATA:

Termination - - - - - - - - - - - - - - - - Terminal board
Special Features - - - - - - - - - - - - - - 4 holes drilled for mounting flush with panel

REFERENCE DATA and LITERATURE

SC-DL-100 432A


MANUFACTURER CODE	PART NUMBER
80058 64959	M-56( )/G GS55090

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: MICROPHONE

NOMENCLATURE: M-65( )/U

FEDERAL STOCK NO: 5965-296-3117

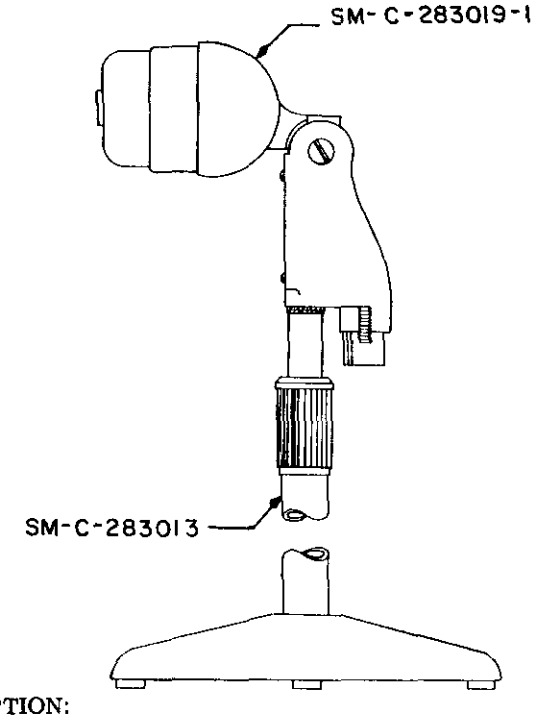

FUNCTIONAL DESCRIPTION:

This microphone is a dynamic omnidirectional desk type with a stand, cable and a cable connector. It is used with a recorder-reproducer.

CONSISTS OF:

1 Microphone M-65( )/U

RELATIONSHIP TO SIMILAR EQUIPMENT:

Used with and part of AN/TNH-2.

PHYSICAL DESCRIPTION:

Dimensions (Over-all):

Length	17.0 inches (431.8 mm)
Diameter (Base)	6.0 inches (152.4 mm)
Height W/Stand	12 inches (304.8 mm) to 17 inches (431.8 mm)

ADDITIONAL PHYSICAL DATA:

Cable Data:

Length (Extended)	120 inches (3,048 mm)
Termination	Integral Cable Type Connector

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: MICROPHONE

NOMENCLATURE: M-65( )/U (Cont)

FEDERAL STOCK NO: 5965-296-3117

TECHNICAL DESCRIPTION:

INPUT
Operating Current - - - - - - - - - - - - - - - - - Not applicable
Polarizing Voltage - - - - - - - - - - - - - - - - - Not rated

OUTPUT
Nominal Impedance - - - - - - - - - - - - - - - - - 150 ohms
Frequency Range - - - - - - - - - - - - - - - - - - 100 to 10,000 Hz

ADDITIONAL TECHNICAL DATA:

Consists of
1 *Microphone* - - - - - - - - - - - - - - - - - - - M-44( )/U
1 Stand, Microphone - - - - - - - - - - - - - - - - MT-1583( )
1 Cable Assembly- - - - - - - - - - - - - - - - - - CX-3322( )/J

REFERENCE DATA and LITERATURE

MIL-M-11101
SM-C-283019
SM-C-283013
SM-D-28015
SM-B-34065


MANUFACTURER CODE	PART NUMBER
80058 82680	M-65( )/U TM-226

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: MICROPHONE

NOMENCLATURE: M-80C/U

FEDERAL STOCK NO: 5965-179-7762

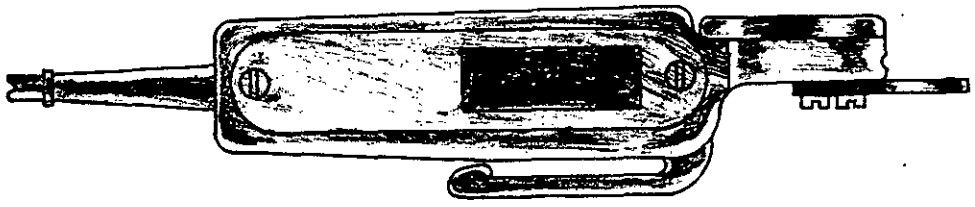

FUNCTIONAL DESCRIPTION:

Palm held, dynamic, and noise canceling microphone that is equipped with a four conductor retractile cord terminated with a connector U-1902( )/U and a clip for attaching the microphone to the user's clothing or a radio set.

CONSISTS OF:

1 Microphone, Dynamic M-80 C/U
Including:
1 Handle
1 Five-conductor retractible cord
1 Retractile cord with integral connector

RELATIONSHIP TO SIMILAR EQUIPMENT:

Similar to M-80( )/GR microphone.

PHYSICAL DESCRIPTION:

Weight - Not rated

Dimensions:
Length - 2 inches (50.8 mm)
Width - 1.4 inches (35.56 mm)
Height - 6.1 inches (152.65 mm)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: MICROPHONE

NOMENCLATURE: M-80C/U (Cont)

FEDERAL STOCK NO: 5965-179-7762

Cable Data:

Length (Retracted)	11.5 inches (292.10 mm)
Length (Extended)	6 feet (1,828.8 mm)
No. of Conductors	5
No. of Connectors	1
Connector Plug	U-182( )/U

TECHNICAL DESCRIPTION:

INPUT

Operating Current	Not rated

OUTPUT

Nominal Impedance	150 ohms at 1,000 Hz
Frequency Range	300 to 3,500 Hz

ADDITIONAL TECHNICAL DATA:

Environmental Data:

Moisture Resistance	Water tight (3 feet water for 2 hrs)
Operating Temperature	MIL-STD-169
Nonoperating Temperature	MIL-STD-169
Relative Humidity (Nonoperating)	97 to 100 percent
Elevation (Operating)	Up to 15,000 feet above sea level
Elevation (Nonoperating)	Up to 50,000 feet above sea level
Salt spray	20 percent salt solution at 96°F for 48 hrs.
Vibration	Method 201 of MIL-STD-202
Blast	SK-N-864
Switch Data	Push-to-talk type

REFERENCE DATA and LITERATURE

MIL-E-55119
Drawing and Data List DL-SMA-317091


MANUFACTURER CODE	PART NUMBER
80058 81134	M-80 C/U 980

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: MICROPHONE

NOMENCLATURE: M-87/AIC

FEDERAL STOCK NO: 5965-755-4643

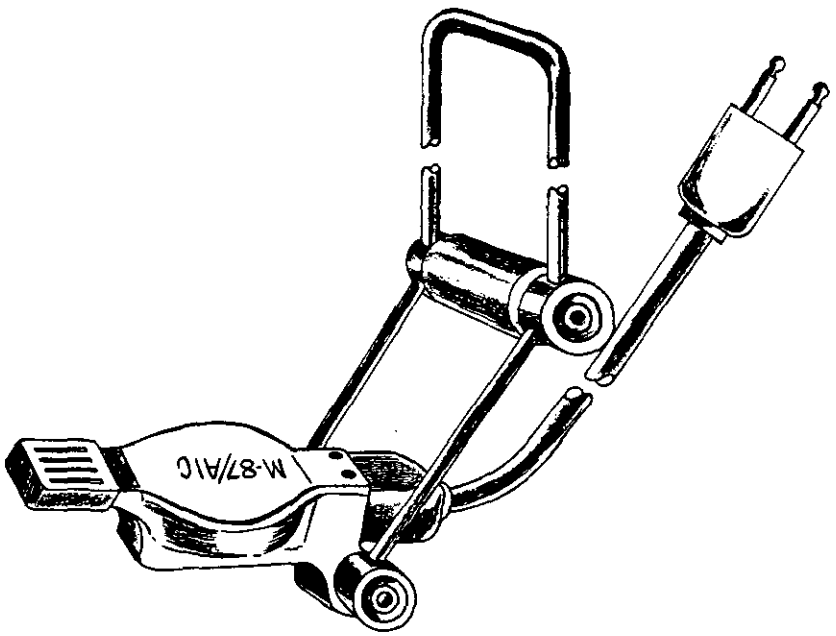

FUNCTIONAL DESCRIPTION:

Microphone, dynamic M-87/AIC is a noise-canceling dynamic moving coil microphone designed for use on a headband type headset at low altitudes or for use in a pressure type oxygen helmet, at altitudes where the use of an oxygen helmet is required. The microphone is intended for use as a part of intercommunication set AN/AIC-10( ) to provide communication of high intelligibility under the extreme noise conditions encountered in military aircraft.

CONSISTS OF:

1 Microphone, Dynamic M-87/AIC
Including:
1 Cable Assembly - - - - - - - - - - CX-4434( )/U (Dwg 57C12661).
1 Boom Assembly - - - - - - - - - - Dwg 58C12687

RELATIONSHIP TO SIMILAR EQUIPMENT:

PHYSICAL DESCRIPTION:

Weight - - - - - - - - - - - - - - - - - - 45 grams maximum.
Color - - - - - - - - - - - - - - - - - - Medium gray.

Dimensions:

Length - - - - - - - - - - - - - - - - 8.67 inches (220.22 mm)
Width (max. point) - - - - - - - - - - .72 inches (18.29 mm)
Height (overall) - - - - - - - - - - - 1.0 inches (25.4 mm)

Source: https://assist.dla.mil -- Downloaded: 202640-26T13:37Z
Check the source to verify that this is the currentversion before use.

ITEM NAME: MICROPHONE

NOMENCLATURE: M-87/AIC (Cont)

FEDERAL STOCK NO: 5965-755-4643

Cable Data:

Length	5.25 inches (133.35 mm)
No. of Conductors	2
No. of Connectors	1
Connector Designation	U-173/U

ADDITIONAL PHYSICAL DATA:

Diaphragm Material	Metal

TECHNICAL DESCRIPTION:

INPUT

Operating Current	Not applicable.

OUTPUT

Nominal Impedance	5.0 ohms ±2.0 ohms at 1,000 Hz
Frequency Range	200 to 6,000 Hz

ADDITIONAL TECHNICAL DATA:

Environmental Characteristics:

Ambient Operating Conditions:

Temperature	-55 degrees C to 85 degrees C
Explosive Decompression	Pressure reduction from 22 in Hg (8000 ft.) to 7 in Hg (35,000 ft.) in 0.1 second
Moisture Barrier Seal	.25 lb_f/in^2
Stray Magnetic Field	Maximum of 5 degrees compass deflection at 12 inches.
Humidity	MIL-T-5422
Vibration	MIL-T-5422
Shock	MIL-T-5422
Salt Spray	MIL-T-5422

REFERENCE DATA and LITERATURE

MIL-M-26542
Air Force Drawings: 57B12662, 58B12627, 58C12687, and 57C12661


MANUFACTURER CODE	PART NUMBER
80058	M-87/AIC

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: MICROPHONE

NOMENCLATURE: M-92C/U

FEDERAL STOCK NO: 5965-845-6325

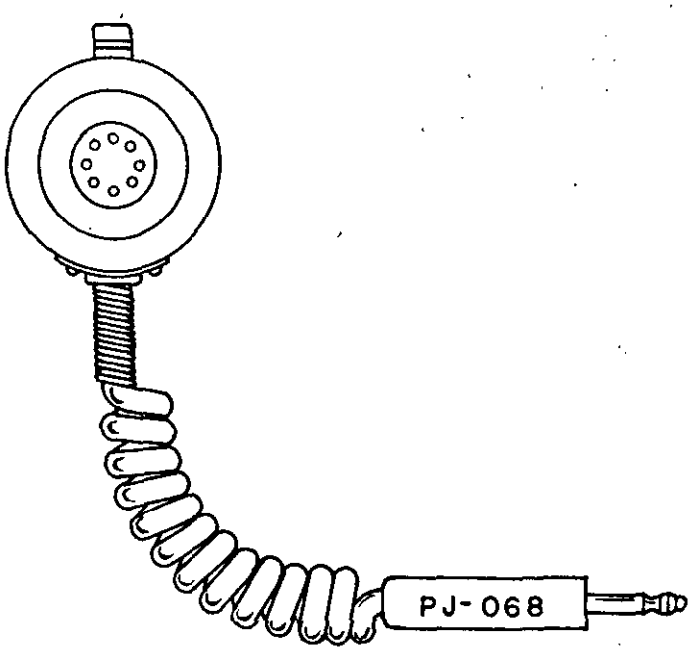

FUNCTIONAL DESCRIPTION:

The M-92C/U is a hand-held push-to-talk dynamic microphone with self-contained transistor amplifiers.

CONSISTS OF:

1 Microphone, Dynamic M-92C/U
Including:
1 Retractile Cord
1 Connecting Jack, PJ-068
1 Holder Assembly, MT-2014/U

RELATIONSHIP TO SIMILAR EQUIPMENT:

Similar to M-85/U, except it uses a dynamic microphone.

PHYSICAL DESCRIPTION:

Weight - 12 ounces, max. (including holder and retractile cord)

Dimensions:
Length - 2-3/16 inches (50.99 mm)
Width - 2-17/32 inches (51.33 mm)
Depth - 1-9/16 inches (25.96 mm)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: MICROPHONE

NOMENCLATURE: M-92C/U (*Cont*)

FEDERAL STOCK NO: 5965-845-6325

Cable Data:

Length	13 inches (330.2 mm) coiled
No. of Conductors	3
Connector Designation	PJ-068

ADDITIONAL PHYSICAL DATA:

Case Data:

Material	Plastic
Finish	Polished or satinized dull finish

TECHNICAL DESCRIPTION:

Nominal Impedance	100 ohms
Frequency Range	300 to 4,000 Hz

ADDITIONAL TECHNICAL DATA:

Service Conditions	MIL-E-5400
Sand and Dust	Not rated
Stray Magnetic Field	3 degrees maximum compass deflection at 8-inch radius

REFERENCE DATA and LITERATURE

MIL-M-21393(WEP)


MANUFACTURER CODE	PART NUMBER
08288	M-92C/U

Source: https://assist.dla.mil -- Downloaded: 202640-26T13:37Z
Check the source to verify that this is the currentversion before use.

ITEM NAME: MICROPHONE

NOMENCLATURE: M-94A/A

FEDERAL STOCK NO: 5965-978-2795

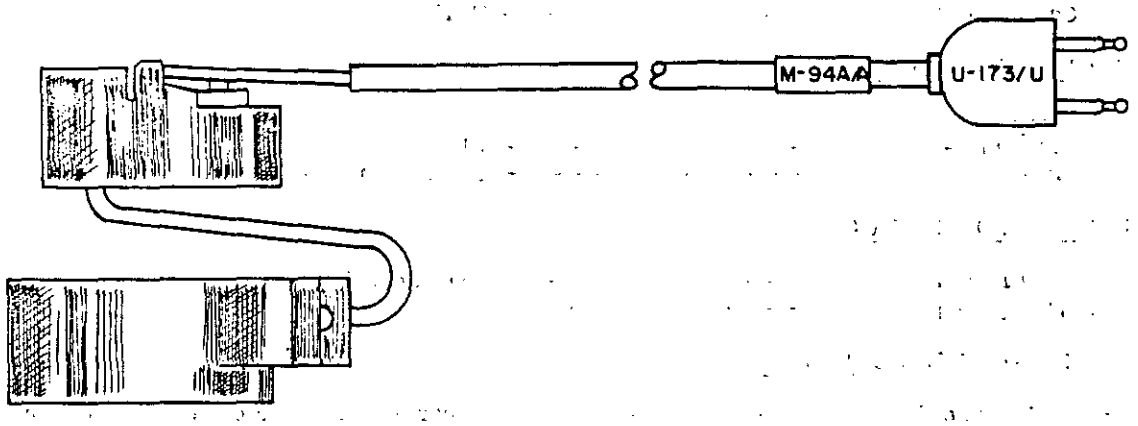

FUNCTIONAL DESCRIPTION:

The M-94A/A is a noise canceling, dynamic microphone suitable for use with standard Navy oxygen mask.

CONSISTS OF:

1 Microphone, Dynamic M-94A/A
Including:
1 Bracket Assembly
1 Cord Assembly
1 Connector Plug, U-173/U

RELATIONSHIP TO SIMILAR EQUIPMENT:

Similar to NT-51004C except that it uses a retractile cord.

PHYSICAL DESCRIPTION:

Weight of microphone - - - - - - - - - - - - - - - - - 1.5 ounces, maximum

Dimensions:
Microphone Diameter - - - - - - - - - - - - - - - 1 inch (25.4 mm)
Depth - 0.50 inch (12.70 mm)

Bracket:
Diameter - 1-1/8 inch (25.52 mm)
Depth - 1/2 inch (.5 mm)

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: MICROPHONE

NOMENCLATURE: M-94A/A (Cont)

FEDERAL STOCK NO: 5965-978-2795

Cable Data:

Length	24 inches (609.6 mm)
No. of Conductors	2
Connector Designation	U-173/U

ADDITIONAL PHYSICAL DATA:

Case Data:

Material	Plastic
Finish	Polished or satinized dull finish

TECHNICAL DESCRIPTION:

Nominal Impedance	100 ohms, dc
Frequency Range	300 to 4,000 Hz

ADDITIONAL TECHNICAL DATA:

Stray Magnetic Field	3 degrees maximum compass deflection at 8-inch radius
Altitude	Sea level to 50,000 feet (3.4 inches (77.22 mm) of mercury)
Temperature	62° C to +71° C
Salt Spray	MIL-T-5422
Humidity	MIL-T-5422
Vibration	MIL-T-5422
Impact	6 feet on concrete floor

REFERENCE DATA and LITERATURE

MIL-M-21734(WEP)


MANUFACTURER CODE	PART NUMBER
08288	M-94A/A

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: MICROPHONE

NOMENCLATURE: M-100/AIC

FEDERAL STOCK NO: 5965-854-0658

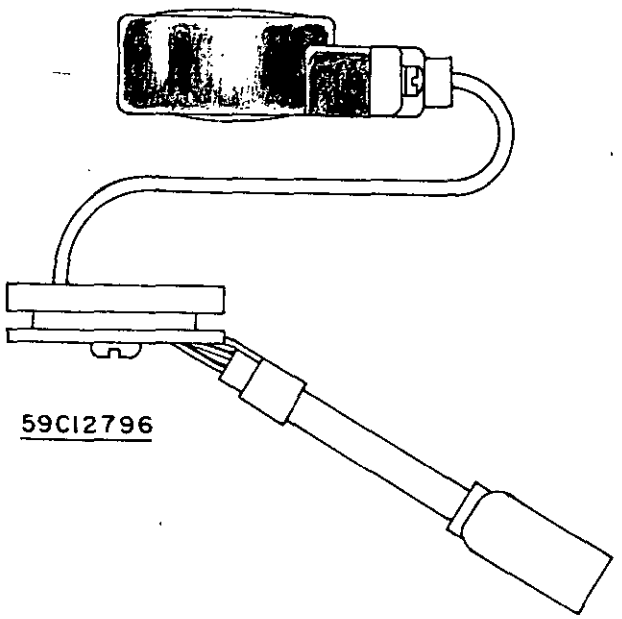

FUNCTIONAL DESCRIPTION:

Microphone, dynamic M-100/AIC is a noise-canceling dynamic moving-coil microphone designed for use with an oxygen mask, type MBU-5/P. The microphone is intended for use with intercommunication sets AN/AIC-10 ( ) and AN/AIC-18 to provide communication of high intelligibility under the extreme noise conditions encountered in military aircraft.

CONSISTS OF:

1	Microphone Element - - - - - - -	M101/AIC
	Including:	
1	Cable Assembly	
1	Bracket - - - - - - - - - - - - - -	MT-2189/AIC

RELATIONSHIP TO SIMILAR EQUIPMENT:

Microphone M-100/AIC uses microphone element M-101/AIC of MIL-M-27291.

PHYSICAL DESCRIPTION:

Weight - - - - - - - - - - - - - - - - - -	45 grams maximum.
Color - - - - - - - - - - - - - - - - - - -	Black

Dimensions:

Length - - - - - - - - - - - - - - - - -	2.375 inches (60.33 mm)
Width (max. point) - - - - - - - - - -	1.375 inches (34.93 mm)
Height (overall) - - - - - - - - - - - -	1.75 inches (44.45 mm)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: MICROPHONE

NOMENCLATURE: M-100/AIC (Cont)

FEDERAL STOCK NO: 5965-854-0658

Cable Data:

Length	24 inches (609.6 mm)
No. of Conductors	2
No. of Connectors	1
Connector Designation	U-173/U

ADDITIONAL PHYSICAL DATA:

Diaphragm Material	Polyethylene terephthalate (Mylar polyester)

TECHNICAL DESCRIPTION:

INPUT

Operating Current	Not applicable.

OUTPUT

Impedance	7 ohms ±2.0 ohms at 1,000 Hz
Frequency Range	200 to 6,000 Hz

ADDITIONAL TECHNICAL DATA:

Environmental Characteristics:

Ambient Operating Conditions:

Temperature	-55 degrees C to 71 degrees C.
Humidity	100 percent.
Explosive Decompression	Pressure reduction from 22 in Hg (8000 ft.) to 7 in Hg (35,000 ft.) in 0.1 second.
Moisture Barrier Seal	.25 lb_f/in^2
Vibration	MIL-T-5422

REFERENCE DATA and LITERATURE:

MIL-M-27291
MIL-M-27297
AF Drawings: 59C12795 and 59C12796


MANUFACTURER CODE	PART NUMBER
80058	M-100/AIC
81134	682-3067

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: MICROPHONE

NOMENCLATURE: M-101/AIC

FEDERAL STOCK NO: 5965-843-9957

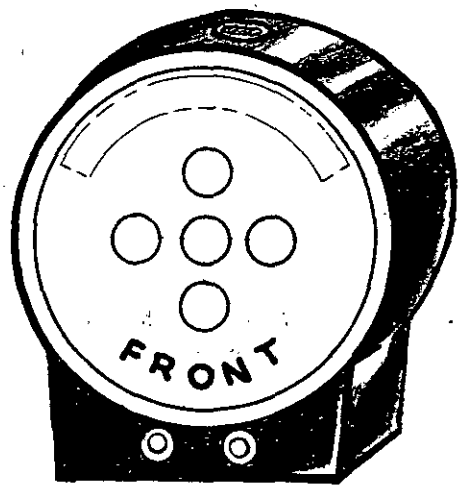

FUNCTIONAL DESCRIPTION:

Microphone element M-101/AIC is a noise-canceling dynamic moving coil microphone element designed for use on a headband type headset at low altitudes or for use in an oxygen mask or pressure-type oxygen helmet, at altitudes where the use of an oxygen helmet is required. The microphone element is intended for use with intercommunication sets AN/AIC-10 and AN/AIC-18 to provide communication of high intelligibility under the extreme noise conditions encountered in military aircraft.

CONSISTS OF:

1 Microphone Element M-101/AIC

RELATIONSHIP TO SIMILAR EQUIPMENT:

Microphone element M-101/AIC is used with microphone M-100/AIC.

PHYSICAL DESCRIPTION:

Weight - 16 grams maximum.

Dimensions:

Length - - - - - - - - - - - - - - - - - - 1.163 inches (29.54 mm) (exclusive of cable).
Width (max. point) - - - - - - - - - - - - .5 inches (12.70 mm)
Height (overall)- - - - - - - - - - - - - 1.047 inches (26.44 mm)

Cable Data - - - - - - - - - - - - - - - - Not applicable.
No. of Conductors - - - - - - - - - - - - 2

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: MICROPHONE

NOMENCLATURE: M-101/AIC (Cont)

FEDERAL STOCK NO: 5965-843-9957

ADDITIONAL PHYSICAL DATA:

Diaphragm Material	Polyethylene terephthalate (Mylar polyester)

TECHNICAL DESCRIPTION:

INPUT

Operating Current	Not applicable.

OUTPUT

Nominal Impedance	7 ohms ±2 ohms at 1,000 Hz.
Frequency Range	200 to 6,000 Hz.

ADDITIONAL TECHNICAL DATA:

Environmental Characteristics:

Ambient Operating Conditions:

Temperature	-55 degrees C to 71 degrees C.
Humidity	100 percent
Explosive Decompression	Pressure reduction from 22 in Hg (8000 ft.) to 7 in Hg (35,000 ft.) in 0.1 second
Vibration	MIL-T-5422
Shock	MIL-T-5422
Salt Spray	MIL-T-5422

REFERENCE DATA and LITERATURE

MIL-M-27291


MANUFACTURER CODE	PART NUMBER
80058 81134	M-101/AIC 82368

Source: https://assist.dla.mil -- Downloaded: 202640-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: MICROPHONE

NOMENCLATURE: M-102/AIC

FEDERAL STOCK NO: 5965-857-6622

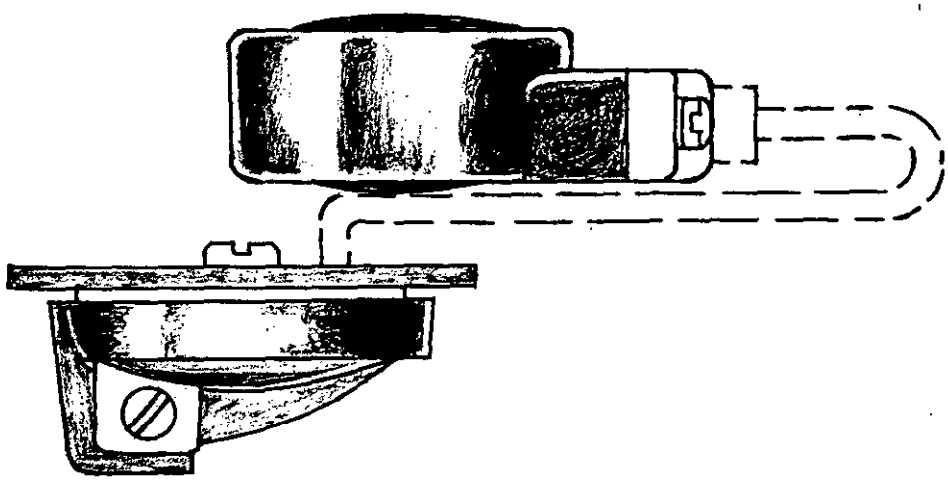

60C4309

FUNCTIONAL DESCRIPTION:

Microphone, dynamic M-102/AIC is a noise-canceling dynamic moving-coil microphone designed for use with an oxygen mask, type MBU-4/P. The microphone is intended for use with intercommunication sets AN/AIC-10( ) and AN/AIC-18 to provide communication of high intelligibility under the extreme noise conditions encountered in military aircraft.

CONSISTS OF:

1 Microphone, Element M-101/AIC
Including:
1 Bracket, Microphone MT-2190/AIC

RELATIONSHIP TO SIMILAR EQUIPMENT:

Microphone element M-101/AIC is used with this microphone.

PHYSICAL DESCRIPTION:

Weight - 40 grams maximum.

Dimensions:

Length - - - - - - - - - - - - - - - - - -	1.5 inches (38.10 mm) (exclusive of cable)
Width (max. point) - - - - - - - - - - -	1.0 inches (25.4 mm)
Height (overall) - - - - - - - - - - - -	1.5 inches (38.10 mm)

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:37Z
Check the source to verify that this is the currentversion before use.

ITEM NAME: MICROPHONE

NOMENCLATURE: M-102/AIC (Cont)

FEDERAL STOCK NO: 5965-857-6622

Cable Data:

Length	19 inches (482.6 mm)
No. of Conductors	2
No. of Connectors	1
Connector Designation	See Dwg. 60C4309

ADDITIONAL PHYSICAL DATA:

Diaphragm Material	Polyethylene terephthylate (Mylar polyester)

TECHNICAL DESCRIPTION:

INPUT

Operating Current	Not applicable.

OUTPUT

Nominal Impedance	7 ohms ±2 ohms at 1, 000 Hz
Frequency Range	200 to 6, 000 Hz

ADDITIONAL TECHNICAL DATA:

Environmental Characteristics:

Ambient Operating Conditions:

Temperature	-55 degrees C to 71 degrees C.
Humidity	100 percent.
Explosive Decompression	Pressure reduction from 22 in Hg (8000 ft.) to 7 in Hg (35, 000 ft.) in 0.1 second.
Environmental	MIL-T-5422

REFERENCE DATA and LITERATURE

MIL-M-27469
MIL-M-27291
Air Force Drawings: 60C4308, 60C4309, and 60C4311


MANUFACTURER CODE	PART NUMBER
80058 82872	M-102/AIC 10300

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: MICROPHONE

NOMENCLATURE: M-103/AIC

FEDERAL STOCK NO: 5965-431-2476

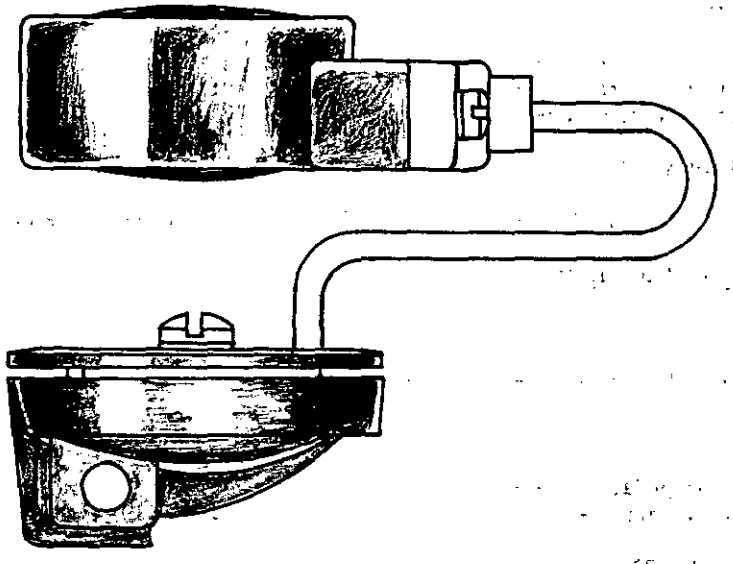

60C4311

FUNCTIONAL DESCRIPTION:

Microphone, dynamic M-103/AIC is a noise-canceling dynamic moving-coil microphone designed for use with an oxygen mask, type MBU-3/P. The microphone is intended for use with intercommunication sets AN/AIC-10( ) and AN/AIC-18 to provide communication of high intelligibility under the extreme noise conditions encountered in military aircraft.

CONSISTS OF:

1 Microphone, Dynamic M-103/AIC
Including:
1 Bracket MT-2191/AIC

RELATIONSHIP TO SIMILAR EQUIPMENT:

Microphone M-103/AIC uses microphone element M-101/AIC of MIL-M-27291.

PHYSICAL DESCRIPTION:

Weight - 35.0 grams.

Dimensions:

Length - - - - - - - - - - - - - - - - - -	1.81 inches (45.97 mm) (exclusive of cable).
Width (max. point) - - - - - - - - - - - -	1.125 inches (28.58 mm).
Height (overall) - - - - - - - - - - - - -	1.375 inches (34.93 mm).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: MICROPHONE

NOMENCLATURE: M-103/AIC (Cont)

FEDERAL STOCK NO: 5965-431-2476

Cable Data:

Length	Not applicable.
No. of Conductors	2
Connector Designation	Per Dwg 60C4311

ADDITIONAL PHYSICAL DATA:

Diaphragm Material	Polyethylene terephthalate (Mylar polyester)

TECHNICAL DESCRIPTION:

INPUT

Operating Current	Not applicable.

OUTPUT

Nominal Impedance	7 ohms ±2. 0 ohms at 1, 000 Hz
Frequency Range	200 to 6, 000 Hz

ADDITIONAL TECHNICAL DATA:

Environmental Characteristics:

Ambient Operating Conditions:

Temperature	-55 degrees C to 71 degrees C.
Humidity	100 percent.
Explosive Decompression	Pressure reduction from 22 in Hg (8000 ft.) to 7 in Hg (35, 000 ft.) in 0. 1 second.
Moisture Barrier Seal	. 25 lb_f/in^2
Environmental	MIL-T-5422

REFERENCE DATA and LITERATURE

MIL-M-27291
MIL-M-27470


MANUFACTURER CODE	PART NUMBER
80058	M-103/AIC

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: MICROPHONE

NOMENCLATURE: M-110/U

FEDERAL STOCK NO: 5965-752-5820

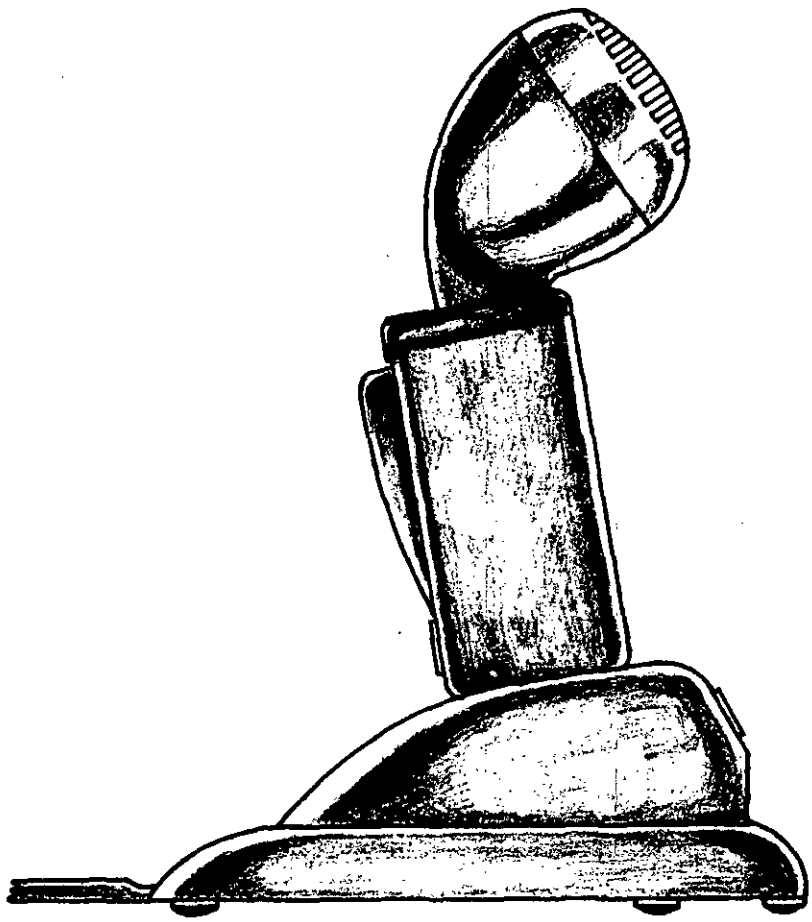

FUNCTIONAL DESCRIPTION:

Unidirectional, desk type, with stand, push to talk switch, and cable with integral connector terminal.

CONSISTS OF:

1 Microphone M-110/U
1 Stand
1 Cable
1 Switch - Press to talk type

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: MICROPHONE

NOMENCLATURE: M-110/U (Cont)

FEDERAL STOCK NO: 5965-752-5820

RELATIONSHIP TO SIMILAR EQUIPMENT:

This microphone is intended to be used with and part of OA-3014/FSW-8 and OA-3014 A/FSW-8.

PHYSICAL DESCRIPTION:

Microphone Type - - - - - - - - - - - - - - - - Magnetic
Dimensions (Over-all):
Height - 9.313 inches (236.55 mm) (w/stand)
Base - 5 x 7 inches

ADDITIONAL PHYSICAL DATA:

Cable Data:
Length (Extended) - - - - - - - - - - - - - 84 inches (2,133.6 mm)
Number of Conductors - - - - - - - - - - - 4
Shielding - - - - - - - - - - - - - - - - - - Yes
Termination - - - - - - - - - - - - - - - - Integral cable type connector
Length (Retracted) - - - - - - - - - - - - - 16.5 inches (419.10 mm)

TECHNICAL DESCRIPTION:

INPUT
Operating Current - - - - - - - - - - - - - - 100 mA
Polarizing Voltage - - - - - - - - - - - - - - Not rated

OUTPUT
Nominal Impedance - - - - - - - - - - - - - 200 ohms
Frequency Range - - - - - - - - - - - - - - 70 to 8,000 Hz

ADDITIONAL TECHNICAL DATA:

70 dB below 1 mW per 10 microbars.
Humidity, Indefinite Period - - - - - - - - 97 percent
Humidity, 4 hours - - - - - - - - - - - - - 100 percent
Elevation (Operating) - - - - - - - - - - - 10,000 feet
Elevation (Nonoperating) - - - - - - - - - 25,000 feet
Temperature Operating - - - - - - - - - - -20°F to +140°F
Temperature Nonoperating - - - - - - - - -40°F to +160°F

REFERENCE DATA and LITERATURE:

MIL-C-55043
SM-C-366469


MANUFACTURER CODE	PART NUMBER
80058 77638	M-110/U C492-5309

Source: https://assist.dla.mil -- Downloaded: 202640-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: MICROPHONE

NOMENCLATURE: M-133( )/U

FEDERAL STOCK NO: 5965-900-8102

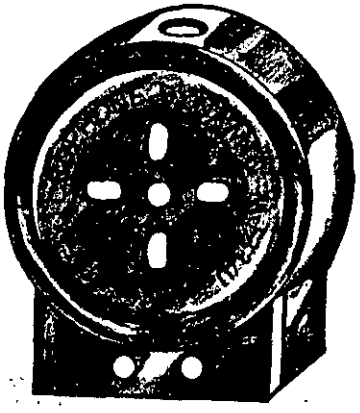

FUNCTIONAL DESCRIPTION:

The M-133( )/U is a moving coil, noise canceling, dynamic microphone intended for use under Army aircraft oxygen masks.

CONSISTS OF:

1 Microphone element, dynamic, M-133( )/U

RELATIONSHIP TO SIMILAR EQUIPMENT:

PHYSICAL DESCRIPTION:

Weight	Not Available
Dimensions:	
Diameter	1.032 inches (26.21 mm)
Width	.500 inches (12.70 mm)
Height	1.200 inches (30.48 mm)

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: MICROPHONE

NOMENCLATURE: M-133( )/U (Cont)

FEDERAL STOCK NO: 5965-900-8102

ADDITIONAL PHYSICAL DATA:

Case Material: Not rated.

TECHNICAL DESCRIPTION:

INPUT
Operating Current - - - - - - - - - - - - - - - - - Not rated

OUTPUT
Impedance - 4 to 7-1/2 ohms
Frequency Range - - - - - - - - - - - - - - - - - 200 to 5,000 Hz

ADDITIONAL TECHNICAL DATA:

Magnetic Performance:

External Magnetic Field - - - - - - - - - - - - - Open-circuit voltage sensitivity 470 microvolts (max) per oersted
Stray Magnetic Field - - - - - - - - - - - - - - - Less than 5 degrees magnetic deflection
Sensitivity at Sea Level - - - - - - - - - - - - - - 2.5 to 5.0 microvolts per dyne
Sensitivity at 25,000 Feet - - - - - - - - - - - - Within 8 dB of sea level
Signal to Noise Ratio - - - - - - - - - - - - - - - 16 dB minimum

Environmental Data:

Altitude - Operationally used up to 15,000 feet, but withstands altitudes up to 50,000 feet without permanent damage
Fungus - Procedure I, method 508, MIL-STD-810
Salt Fog - Method 509, MIL-STD-810
Immersion - 3 feet water
Temperature - - - - - - - - - - - - - - - - - - - +150° F to -40° F
Humidity - MIL-STD-170 and MIL-M-55516(EL)
Bounce - Package tester
Vibration - Simple harmonic motion having an amplitude of 0.03 inch (.76 mm) for 5 hours
Drop - 10 times from a 6 ft. height
Blast - SK-N-864
Sand and Dust - - - - - - - - - - - - - - - - - - MIL-C-9436

REFERENCE DATA and LITERATURE

SC-DL-539922
MIL-M-55516(EL)

MANUFACTURER CODE	PART NUMBER
80058	M-133( )/U

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:37Z
Check the source to verify that this is the current version before use.

SECTION 9

HORN AND DIAPHRAGM LOUDSPEAKERS


Nomenclature, model or part number	Page
LS-103( )/TIQ-2	9.2.1
LS-104( )/TIQ-3	9.3.1
LS-211/AIC-13	9.4.1
LS-387/SIC, LS-388/SIC	9.5.1
M15	9.6.1
NT-49546	9.7.1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: LOUDSPEAKER

NOMENCLATURE: LS-103( )/TIQ-2

FEDERAL STOCK NO: 5965-128-2983

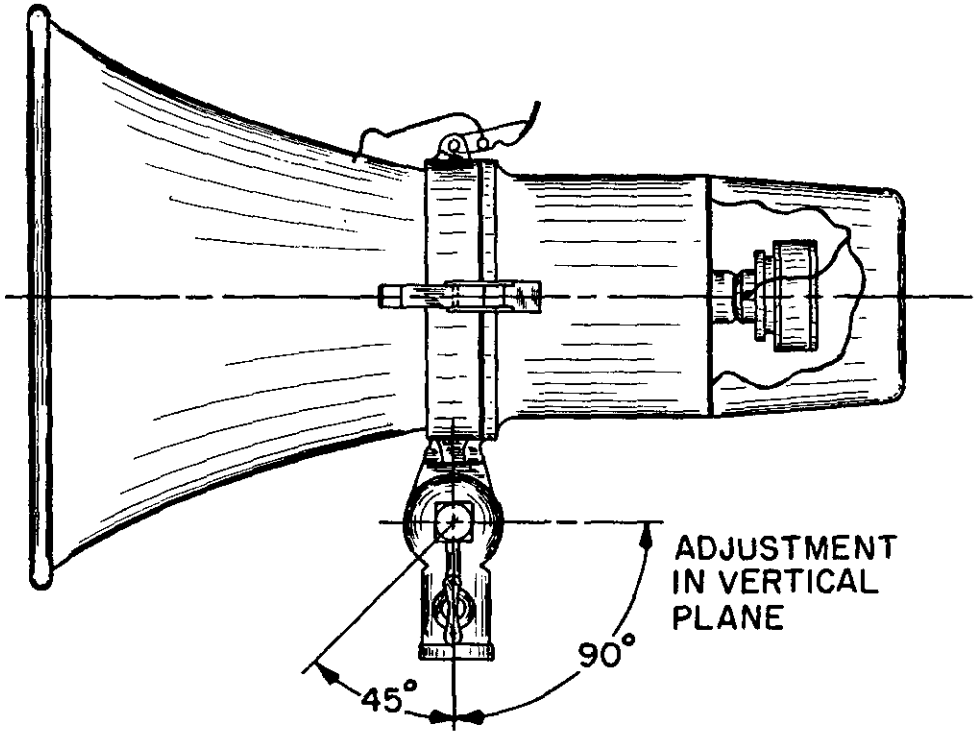

FUNCTIONAL DESCRIPTION:

The LS-103 is a permanent magnet dynamic, reentrant horn type loudspeaker. The unit is rugged in construction and will operate over a wide temperature range and under harsh environmental conditions. The LS-103 is primarily intended for use as part of Public Address Set AN/TIQ-2.

CONSISTS OF:

1 Loudspeaker, Permanent Magnet LS-103/TIQ-2.

RELATIONSHIP TO SIMILAR EQUIPMENT:

Used with Public Address Set AN/TIQ-2. This loudspeaker is similar to the LS-104( )/TIQ-3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: LOUDSPEAKER

NOMENCLATURE: LS-103( )/TIQ-2 (Cont)

FEDERAL STOCK NO: 5965-128-2983

PHYSICAL DIMENSIONS:

Diameter	19.06 inches (484.12 mm)
Mounting Dimensions	Adjustable mounting bracket with .84 inch mounting hole
Terminal/Connector Designation	5 binding posts

Over-all Dimensions:

Diameter	19.06 inches (484.12 mm)
Length	26 inches (660.50 mm)
Weight	14 pounds

ADDITIONAL PHYSICAL DATA:

Horn thread size	1-3/8-18
Loudspeaker color	Green
Horn material	Steel, Aluminum, or Bronze Alloys
Vertical adjustment	Provides for adjustment in the vertical plane
Fasteners	4 fasteners for attaching horn and driver cover

TECHNICAL DESCRIPTION:

INPUT

Voice coil impedance	16 Ohms
Power handling rating	20 watts normal; 25 watts peak (warble tones)
Frequency range	200 to 6,000 Hz

ADDITIONAL TECHNICAL DATA:

Environmental Data:

Nonoperating Conditions:

Temperature	From -80°F (24 hours max.) to +160°F (4 hours max.)
Relative Humidity	97% indefinitely, 100% for 4 hours
Elevation	25,000 feet above sea level

Operating Conditions:

Temperature	From -65°F (72 hours max.) to +150°F (4 hours max.)
Relative Humidity	97%, 100% for 4 hours
Elevation	100,000 feet above sea level

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: LOUDSPEAKER

NOMENCLATURE: LS-103( )/TIQ-2 (Cont)

FEDERAL STOCK NO: 5965-128-2983

Driver Unit Data:

Power Handling Capacity	25 watts at 175 Hz
Weight	4 pounds maximum
Magnet Material	Alnico Number 5 or equal
Transformer Data:	Primary impedances 250, 500, 1,000, and 2,500 ohms
Resistant Characteristics:	Resistant to vibration, gun blast, moisture and shock

REFERENCE DATA and LITERATURE

MIL-L-13941
MIL-L-13941/1
Drawings: SC-DL-15646


MANUFACTURER CODE	PART NUMBER
80058	LS-103( )/TIQ-2
87771	LS-103( )/TIQ-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: LOUDSPEAKER

NOMENCLATURE: LS-104( )/TIQ-3

FEDERAL STOCK NO: 5965-221-5786

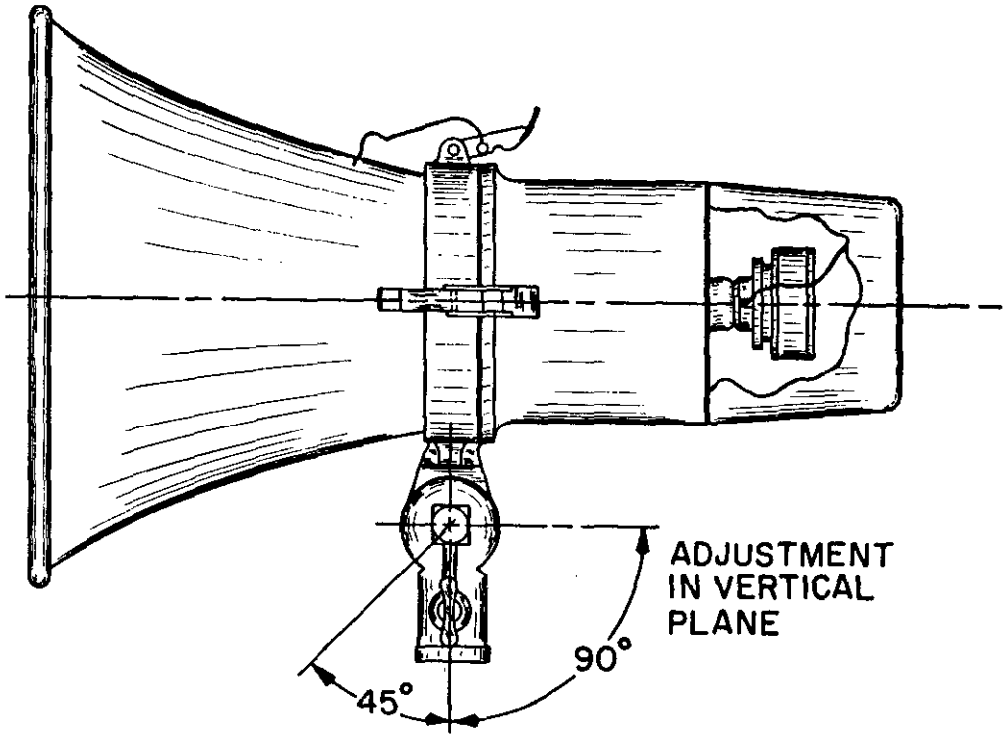

FUNCTIONAL DESCRIPTION:

The LS-104 is a permanent magnet dynamic, reentrant horn type loudspeaker. The unit is rugged in construction and will operate over a wide temperature range and under harsh environmental conditions. The LS-104 is primarily intended for use as part of Public Address Set AN/TIQ-3.

CONSISTS OF:

1 Loudspeaker, Permanent Magnet LS-104-( )/TIQ-3.

RELATIONSHIP TO SIMILAR EQUIPMENT:

Used with Public Address Set AN/TIQ-2. This loudspeaker is similar to the LS-103( )/TIQ-2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: LOUDSPEAKER

NOMENCLATURE: LS-104( )/TIQ-3 (Cont)

FEDERAL STOCK NO: 5965-221-5786

PHYSICAL DIMENSIONS:

Diameter	13.38 inches (339.95 mm)
Mounting Dimensions	Adjustable mounting bracket with .84 inch mounting hole
Terminal/Connector Designation	5 binding posts.

Over-all Dimensions:

Diameter	13.38 inches (339.95 mm)
Length	20.00 inches (508.00 mm)

ADDITIONAL PHYSICAL DATA:

Horn thread size	1-3/8-18
Loudspeaker color	Green
Horn material	Steel, Aluminum, or Bronze Alloys
Vertical adjustment	Provides for adjustment in the vertical plane
Fasteners	4 fasteners for attaching horn and driver cover

TECHNICAL DESCRIPTION:

INPUT

Voice coil impedance	16 Ohms
Power handling rating	20 watts normal; 25 watts peak (warble tones)
Frequency range	200 to 6,000 Hz

ADDITIONAL TECHNICAL DATA:

Environmental Data:

Nonoperating Conditions:

Temperature	From -80°F (24 hours max.) to +160°F (4 hours max.)
Relative Humidity	97% indefinitely, 100% for 4 hours
Elevation	25,000 feet above sea level

Operating Conditions:

Temperature	From -65°F (72 hours max.) to +150°F (4 hours max.)
Relative Humidity	97%, 100% for 4 hours
Elevation	10,000 feet above sea level

Source: https://assist.dla.mil -- Downloaded: 202640-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: LOUDSPEAKER

NOMENCLATURE: LS-104( )/TIQ-3 (Cont)

FEDERAL STOCK NO: 5965-221-5786

Driver Unit Data:

Power Handling Capacity	25 watts at 175 Hz
Weight	4 pounds maximum
Magnet Material	Alnico Number 5 or equal
Transformer Data:	Primary impedances 250, 500, 1,000, and 2,500 ohms
Resistant Characteristics:	Resistant to vibration, gun blast, moisture and shock

REFERENCE DATA and LITERATURE

MIL-L-13941
MIL-L-13941/2
Drawings: SC-DL-90626


MANUFACTURER CODE	PART NUMBER
80058	LS-104( )/TIQ-3
87771	LS-104( )/TIQ-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: LOUDSPEAKER

NOMENCLATURE: LS-211/AIC-13

FEDERAL STOCK NO: 5965-608-0130

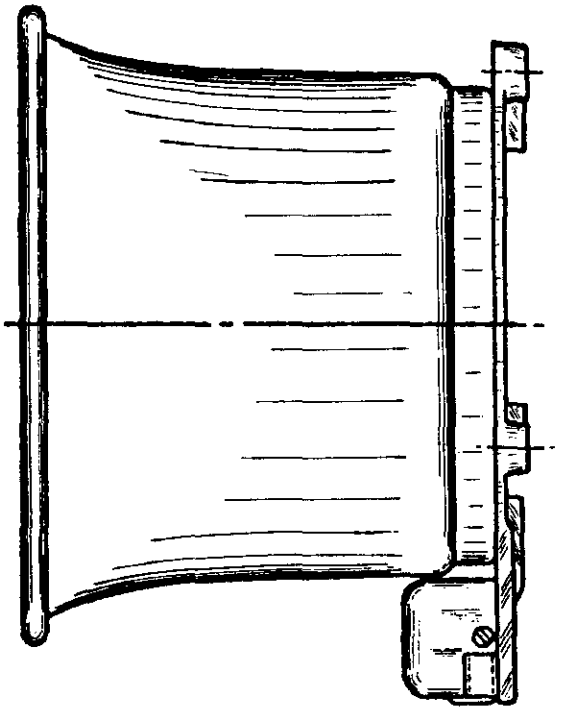

FUNCTIONAL DESCRIPTION:

The LS-211/AIC-13 is a permanent magnet loudspeaker. It is intended to be used as part of Public Address Set AN/AIC-13 to transmit audio messages at low altitudes or at ground level within a military aircraft or from a military aircraft on the ground to personnel in the immediate vicinity. This unit is used where high power is reduced to override high noise levels.

CONSISTS OF:

1 Permanent Magnet Reflex Re-entrant Horn Type Loudspeaker LS-211/AIC-13

RELATIONSHIP TO SIMILAR EQUIPMENT:

Part of Public Address Set AN/AIC-13

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: LOUDSPEAKER

NOMENCLATURE: LS-211/AIC-13 (Cont)

FEDERAL STOCK NO: 5965-608-0130

PHYSICAL DESCRIPTION:

Over-all dimensions:

Length	7.53 inches (191.26 mm)
Width	6.80 inches (172.72 mm)
Depth	4.97 inches (126.24 mm)
Net weight	3.12 pounds

TECHNICAL DESCRIPTION:

INPUT

Voice coil impedance	16 ohms nominal
Power handling rating	20 watts, rms

OUTPUT

Frequency range	500 to 8,000 Hz
Sensitivity	115 dB at full rated power and at a distance of 4 feet on axis

ADDITIONAL TECHNICAL DATA:

Environmental Data:

Operating Conditions:

Temperature	From -67°F to +160°F
Pressure	To 50,000 feet

Other Data:

Explosive Decompression:	10 consecutive explosive decompressions from an altitude of 8000 feet to an altitude of 35,000 feet (corresponding to pressures of 22.2 to 7.04 inches of mercury).
Humidity-Shock-Vibration-Salt Spray-Fungus Resistance	MIL-E-5422

REFERENCE DATA and LITERATURE

SGME-PD-162
MSS 5965-6
Air Force Drawing 55D13316
MIL-E-5422


MANUFACTURER CODE	PART NUMBER
81349	LS-211/AIC-13
87771	LS-211/AIC-13

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: LOUDSPEAKER

NOMENCLATURE: LS-387/SIC; LS-388/SIC

FEDERAL STOCK NO: 5965-296-1808; 5965-636-2181

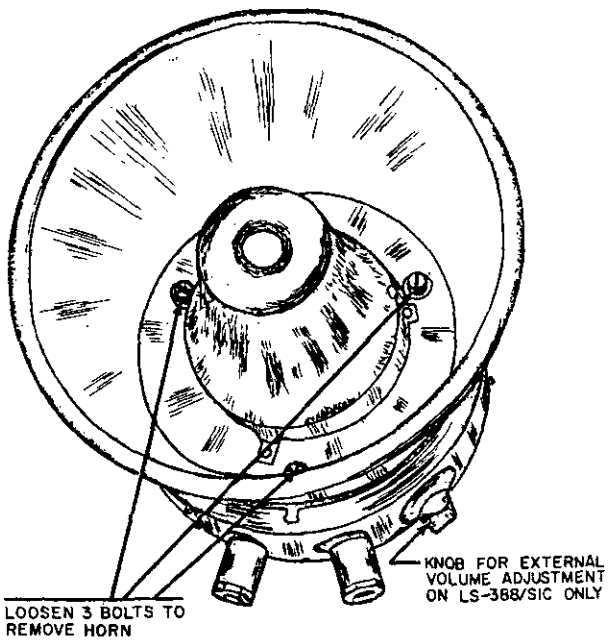

FUNCTIONAL DESCRIPTION:

The LS-387/SIC and LS-388/SIC are high power loudspeakers intended for use on shipboard. They provide good speech intelligibility and good reproduction of alarm signals in areas with high noise levels.

CONSISTS OF:

1 Loudspeaker LS-387/SIC or LS-388/SIC

Including:

1 *Transformer FSN N5950-548-4829*

Source: https://assist.dla.mil -- Downloaded: 202640-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: LOUDSPEAKER

NOMENCLATURE: LS-387/SIC; LS-388/SIC (Cont)

FEDERAL STOCK NO: 5965-296-1808; 5965-636-2181

RELATIONSHIP TO SIMILAR EQUIPMENT:

The LS-387/SIC is identical to the LS-388/SIC except for the method of volume adjustment. On the LS-387/SIC volume is adjusted internally by connecting a movable jumper to any one of five terminals inside the speaker case. The LS-388/SIC volume is adjusted by a five-position tap switch which is accessible on the outside of the case.

PHYSICAL DESCRIPTION:


Nominal diameter - - - - - - - - - - - - 12 inches (304.8 mm)

Mounting dimensions:

Refer to the following figure, Mounting dimensions, for arrangement of mounting holes:

Over-all dimensions:

Length - - - - - - - - - - - - - - - -	10 inches (254.0 mm)
Diameter - - - - - - - - - - - - - - -	12.625 inches (320.68 mm)
Weight - - - - - - - - - - - - - - - - -	23 pounds

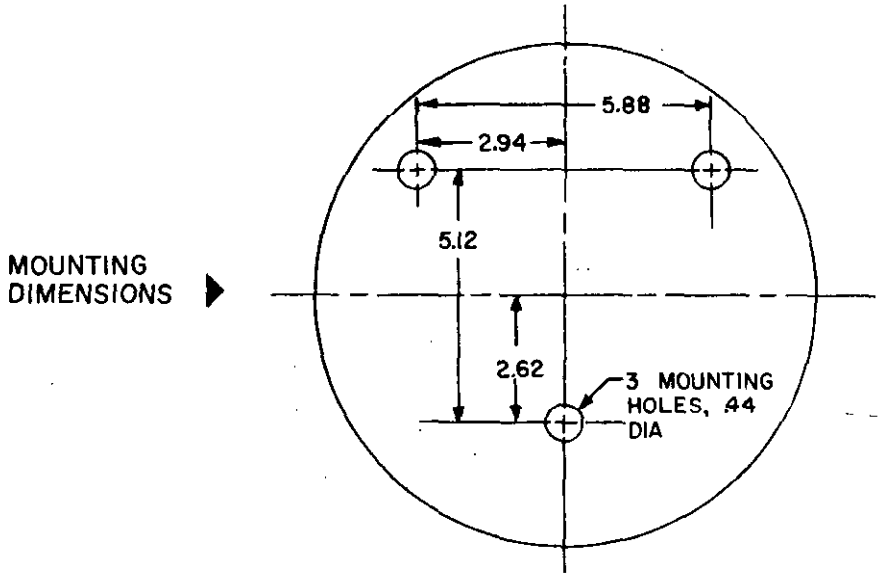

ADDITIONAL PHYSICAL DATA:

Material: Horn assembly and case are brass.
Finish: Light Gray, Semi-Gloss

Source: https://assist.dla.mil -- Downloaded: 20260-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: LOUDSPEAKER

NOMENCLATURE: LS-387/SIC: LS-388/SIC (Cont)

FEDERAL STOCK NO: 5965-296-1808; 5965-636-2181

TECHNICAL DESCRIPTION:

INPUT

Voice coil impedance - - - - - - -	13.5 ohms
Power handling rating - - - - - - -	7.5 watts, peak
Frequency range - - - - - - - - -	400 to 4,000 Hz

ADDITIONAL TECHNICAL DATA:

Transformer data:

The transformer is tapped to allow use with either a 50 or 70 volt audio line.
Primary impedances at 70 volt tap: 670; 3100; 10,200; 18,400; 22,000 ohms.
Primary impedances at 50 volt tap: 350; 1,500; 5,200; 9,600; 11,300 ohms.

REFERENCE DATA and LITERATURE

Jensen Manufacturing Instruction Note No. 129-B.
MIL-A-20222


MANUFACTURER CODE	PART NUMBER
32001	LS-387/SIC
32001	LS-388/SIC

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: LOUDSPEAKER

NOMENCLATURE: COMMERCIAL Model M15

FEDERAL STOCK NO: 5965-284-7456

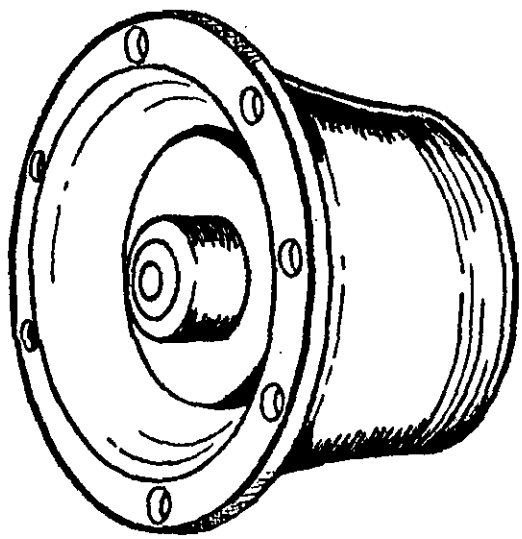

FUNCTIONAL DESCRIPTION:

This loudspeaker is a compact reflex speaker designed for flange or flush mounting in cabinets, walls, etc. The unit has a waterproof construction and withstands destructive, corrosive agents such as humidity, salt spray, wind, and rain. The voice coil diaphragm assemblies are tropicalized and the driver mechanism is sealed in an airtight weather-proof housing. As well as being suitable for paging and public address systems, the speaker is designed to operate as a highly sensitive microphone whenever talk-back communication is desired.

CONSISTS OF:

1 Loudspeaker LTV University Loudspeaker Model M15

RELATIONSHIP TO SIMILAR EQUIPMENT:

LTV University Model M15 can also be obtained with 4- or 45-ohm voice coil impedance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: *LOUDS*

NOMENCLATURE: COMMERCIAL Model M15 (Cont)

FEDERAL STOCK NO: 5965-284-7456

PHYSICAL DESCRIPTION:

Nominal diameter - - - - - - - - - - - - 5.5 inches (139.70 mm)

Over-all dimensions:

Length - - - - - - - - - - - - - - - - 4.438 inches (112.73 mm)
Diameter - - - - - - - - - - - - - - - 5.5 inches (139.70 mm)

Mounting Dimensions:

6 holes on 4.875 inch mounting diameter (123.83 mm)

Weight - - - - - - - - - - - - - - - - - 2-1/2 pounds

TECHNICAL DESCRIPTION:

INPUT

Voice coil impedance - - - - - - - 8 ohms
Power handling rating - - - - - - - 5 watts (10 watts above 500 Hz) (warble tones)
Frequency range - - - - - - - - - - 500 to 13,000 Hz

REFERENCE DATA and LITERATURE

LTV University Loudspeakers Inc. Commercial Catalog 78A155F
The Radio Electronic Master 26th Edition
University Loudspeakers Technilog
ISS 5965-6


MANUFACTURER CODE	PART NUMBER
87771	M15

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: LOUDSPEAKER

NOMENCLATURE: NT-49546

FEDERAL STOCK NO: 5965-296-3398

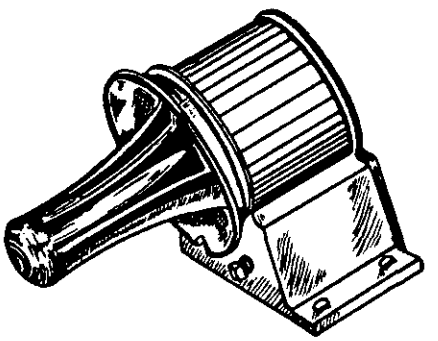

FUNCTIONAL DESCRIPTION:

This loudspeaker is an aluminum all die case reflexed air column speaker with a radial deflector for 360 degree horizontal dispersion. The speaker is resistant to salt spray, gases, live steam, fungus, and harmful dust. The unit, which is a multiduty loudspeaker, includes a tapped, variable primary impedance line or output transformer and a T-pad volume level control. It may be used in applications where ruggedness is a prime requirement.

CONSISTS OF:

1 Loudspeaker, NT-49546

Including:

1 Volume Control, LTV University Loudspeakers Part No. 19 E 13
1 Transformer, LTV University Loudspeaker Part No. 5430

RELATIONSHIP TO SIMILAR EQUIPMENT:

Similar to LTV University Model MSR-T.

Source: https://assist.dla.mil -- Downloaded: 202640-26T13:37Z
Check the source to verify that this is the current version before use.

ITEM NAME: LOUDSPEAKER

NOMENCLATURE: NT-49546 (Cont)

FEDERAL STOCK NO: 5965-296-3398

PHYSICAL DESCRIPTION:

Over-all dimensions:

Height	10.254 inches (277.83 mm)
Width	7.75 inches (196.85 mm)
Depth	8 inches (203.20 mm)

Mounting dimensions: Two 3/8-inch diameter holes 6-7/8 inches center to center.

Weight	10-1/4 pounds
Finish	Navy gray, semigloss

TECHNICAL DESCRIPTION:

INPUT

Voice coil impedance	16 ohms
Power handling rating	10 watts, normal; 15 watts, peak
Frequency range	200 to 5,000 Hz

ADDITIONAL TECHNICAL DATA:

Transformer data:

Primary impedances	600 ohms; 1200 ohms; 1800 ohms; 2400 ohms; 3000 ohms
Secondary impedances	16 ohms
Terminal types	2 solder lugs for secondary; 6 screw type terminals for primary

REFERENCE DATA and LITERATURE

LTV University Loudspeakers Inc. Drawing Number 1915
LTV University Loudspeakers Inc. Commercial Catalog 78A155F
MSS 5965-6

MANUFACTURER CODE	PART NUMBER
80064	NT-49546
81501	MSR-M
87771	NT-49546

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:37Z
Check the source to verify that this is the current version before use.

Custodians:
Army - EL
Navy - EC
Air Force - 80

Review activities:
Army - EL, MI, , MU
Navy - EC
Air Force -80

User activities:
Army - None
Navy - None
Air Force - None

Preparing activity:
Army - EL

(Project 5965-0122)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

FOLD

Department of the Army
Headquarters
U.S.Army Electronics Command
Fort Monmouth, New Jersey 07703

POSTAGE AND FEES PAID

OFFICIAL BUSINESS

Commanding General
U.S.Army Electronics Command
ATTN: AMSEL-RD-ED
Fort Monmouth, New Jersey 07703

FOLD

To detach this form, cut along this line

Source: https://assist.dla.mil -- Downloaded: 202640-26T13:37Z
Check the source to verify that this is the current version before use.

To detach this form, cut along this line

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION MIL-HDBK-173A DEPARTMENT OF THE ARMY TECHNICAL MANUAL TM-11-487
MILITARY STANDARDIZATION HANDBOOK AUDIO EQUIPMENT

ORGANIZATION

CITY AND STATE | CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?
   ☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)* | DATE

DD FORM 1 JAN 66 1426 REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.
ESC-FM 1068-68

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.