MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, (CIRCULAR, ENVIRONMENT RESISTING), RECEPTACLE, (SOLDER FLANGE MOUNT, THREADED COUPLING, SOLDER PIN CONTACTS), (SERIES II, CLASS H)

This specification sheet is approved for use by the Engineering and Technical Support Division (AFLC), Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the connector described herein shall consist of this document and the latest issue of Specification MIL-C-83723.

Ⓑ INACTIVE: USE MS3143 OF MIL-C-5015

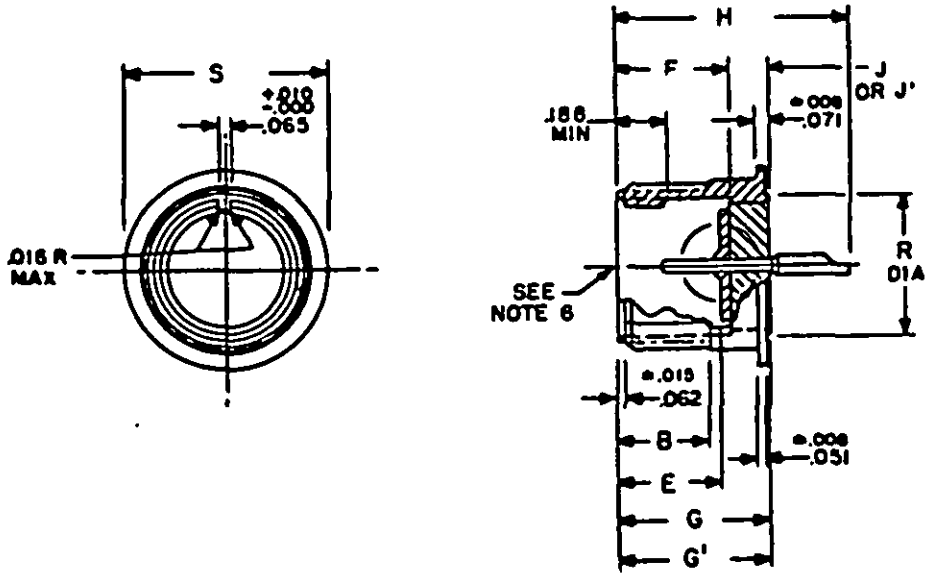


FIGURE 1. CONNECTOR

Ⓑ DENOTES REVISION

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 202610-23T09:19Z
Check the source to verify that this is the current version before use.

Ⓑ TABLE I. Connector dimensions

SHELL SIZE PART NO. DESIGN	MIL-C 5015 SHELL SIZE	B MIN. USABLE THREAD	± +.000 −.030	F +.031 −.000 INSERT LOCA	G +.000 −.025 SHELL LENGTH	G' +.000 −.025 SHELL LENGTH	H MAX. LENGTH	J ±.005 WEB	J' ±.005 WEB	R +.000 −.020 REAR SHLDR O. D.	S +.000 −.020 FLANGE O. D.
08	8S	.375	.500	.562	.725	N/A	1.127	.125	N/A	.438	.760
10	10S									.500	.885
11	10SL									.656	1.010
13	12S									.719	1.135
15	14S									.844	1.260
17	16S									.656	1.010
12	12	.625	.687	.750	.912		1.416			.719	1.135
14	14						1.619			.844	1.260
16	16					1.037	2.001		.250	.969	1.385
18	18									1.156	1.510
20	20									1.250	1.635
22	22									1.375	1.760
24	24									1.625	2.010
28	28									1.875	2.260
32	32									2.125	2.510
36	36										

1. J' WEBB THICKNESS IS USED IN ALL RECEPTACLES, SHELL SIZE 16 AND LARGER WHERE ONE OR MORE CONTACTS ARE SIZE 4 OR LARGER.
2. G' IS LENGTH OF SHELL WHEN J' WEB THICKNESS IS USED.
3. H IS MAXIMUM OVERALL LENGTH FOR RECEPTACLES USING EYELET CONTACTS (NOTE EYELET CONTACT DESIGN IS NOT USED FOR SIZE 4 CONTACTS OR LARGER)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:19Z
Check the source to verify that this is the current version before use.

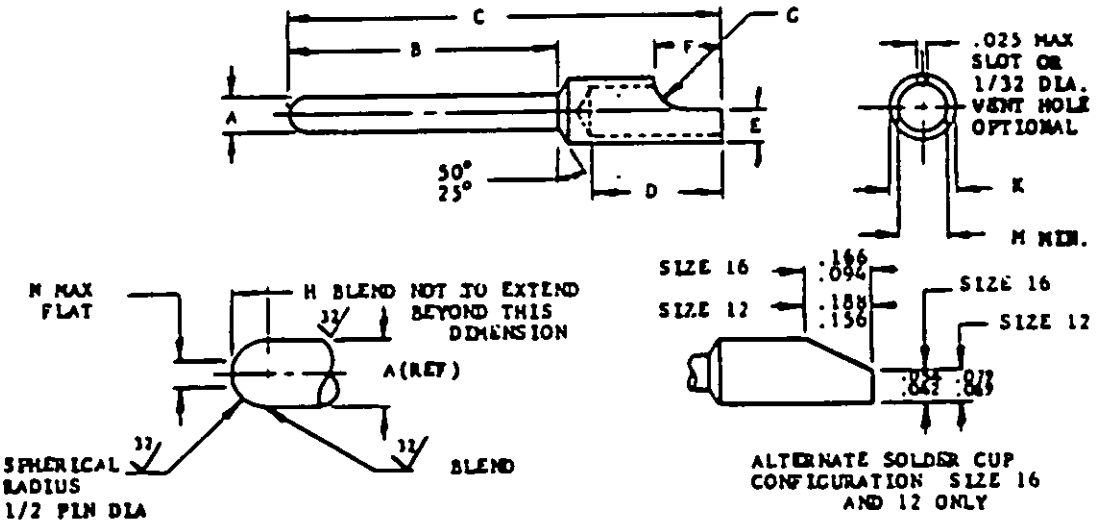


TABLE II. CONTACT DIMENSIONS

CONTACT SIZE (1)	A DIA.	B	C MAX.	D	E	F	G	H MAX.	K DIA.	M DIA.	N MAX.
16	.0635 .0615	.651 .641	1.003	.313 .250	.054 .042	.166 .094	.250 .125	.032	.116 .096	.069	.015
16 (L)	.0635 .0615	.786 .776	1.043	.313 .250	.054 .042	.166 .094	.250 .125	.032	.116 .096	.069	.015
12	.095 .093	.836 .826	1.291	.438 .375	.079 .069	.188 .156	.250 .187	.048	.150 .130	.112	.015
12 (L)	.095 .093	1.012 1.002	1.468	.438 .375	.079 .069	.188 .156	.250 .187	.048	.150 .130	.112	.015
8	.143 .141	.880 .870	1.494	.563 .500	.128 .118	.266 .234	.260 .240	.072	.259 .243	.205	.015
8 (L)	.143 .141	1.012 1.002	1.619	.563 .500	.128 .118	.266 .234	.260 .240	.072	.259 .243	.205	.015
4 (L)	.226 .224	1.012 1.002	1.876	.688 .625	.191 .181	.327 .297	.510 .490	.105	.397 .370	.328	.110
0 (L)	.358 .356	1.012 1.002	1.876	.688 .625	.267 .247	.327 .297	.510 .490	.139	.550 .510	.464	.240

(1) CONTACTS DENOTED BY (L) ARE USED IN ALL RECEPTACLES WITH .1" WEB THICKNESS.

FIGURE 2. Hermetic solder cup contacts

NOTES:
1. All dimensions are in inches and apply after plating.
2. 125/ all over per ANSI B46.1 unless otherwise specified.
3. Remove burrs and sharp edges .015 max. x 50°/40° chamfer or .015 R max. unless otherwise specified.
4. Contact diameters concentric within .004 TIR.
5. Receptacle diameters concentric within .010 diameter.
6. For details of connector front end configuration see procurement specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:19Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figures 1 and 2.

This receptacle mates with M83723/23.


(E) Contact finish: Gold plate per MIL-G-45204, type II, .000050 inch minimum. A suitable underplate may be used. Silver shall not be used.

Receptacle shell finish: Tin plate per MIL-T-10727, type I, .00010 inch minimum thick (fused) over suitable underplate.

(B) For alternate polarizing positions and insert arrangements, refer to MIL-STD-1651. In alternate positions vitreous seal insert is rotated clockwise from master key in shell to corresponding required alternate position.

Contact solder cup to face perpendicular to vertical center line of insert arrangement within ±15°.

Part number example:

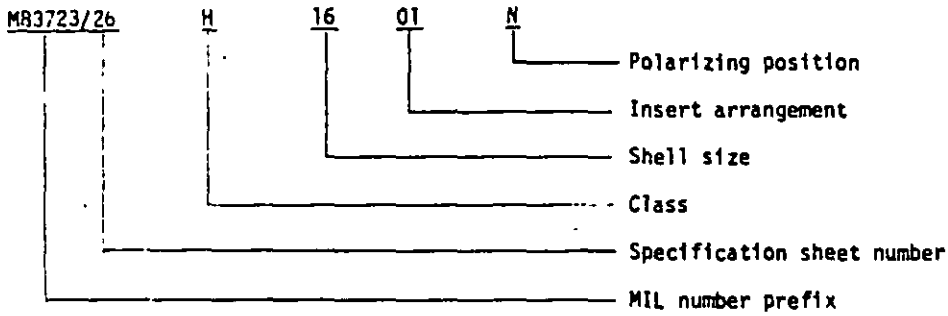

Custodian:
Air Force - 85

Review activities:
Air Force - 11, 15, 17, 99

Preparing activity:
Air Force - 85

(Project 5935-F024-10)

☆U.S. GOVERNMENT PRINTING OFFICE: 1976-603-766/6767

Source: https://assist.dla.mil -- Downloaded: 202610-23T09:19Z
Check the source to verify that this is the current version before use.

FOLD

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID
DEPARTMENT OF THE AIR FORCE
DoD-318

AFLC/LOIE/Standardization
Wright-Patterson AFB OH 45433.

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:19Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MIL-C-83723/26B (USAF) Connectors, Electrical, (Circular, Environment Resisting

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER FSC 5935

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED

C 16061

Source: https://assist.dla.mil -- Downloaded: 202640-23T09:19Z
Check the source to verify that this is the current version before use.