INCH-POUND

MIL-DTL-83723/70B
w/AMENDMENT 1
14 August 2019
SUPERSEDING
MIL-DTL-83723/70B
29 June 2009

DETAIL SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, CIRCULAR, ENVIRONMENT RESISTING, RECEPTACLE ADAPTER, PUSH-PULL, QUICK-DISCONNECT, SERIES III, CLASSES A, G, M, R, T, W AND Z

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-83723.

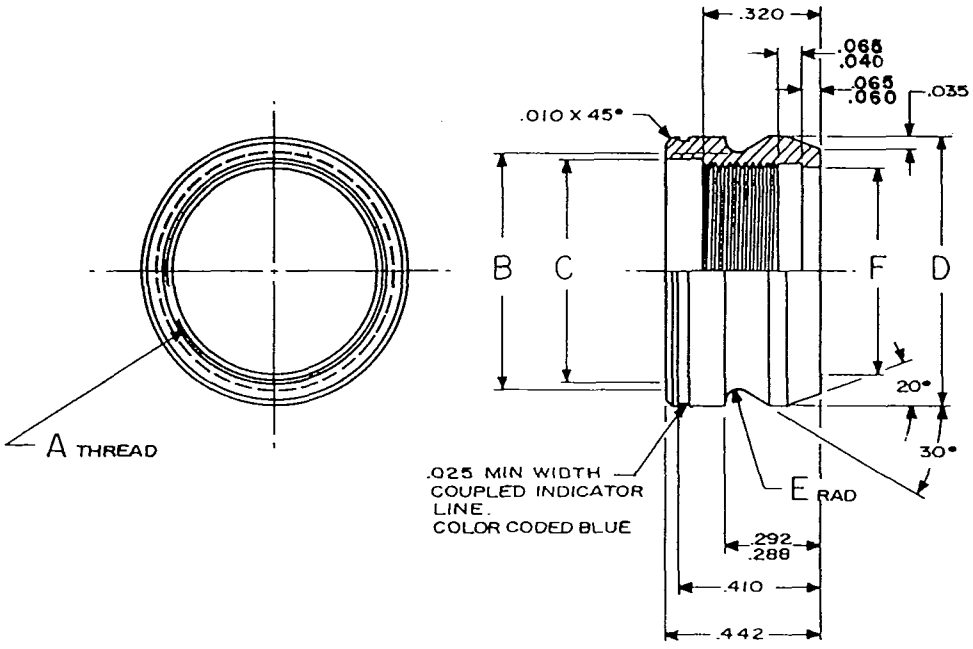


FIGURE 1. Receptacle, adapter, dimensions and configuration.

AMSC N/A

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:21Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm
.010	.25	.060	1.52	.320	8.13
.025	.64	.065	1.65	.410	10.41
.035	.89	.288	7.32	.442	11.23
.040	1.02	.292	7.42		

Shell size	A UNEF-2B coupling thread	B dia	C dia	D dia	E	F dia
8	.5625-24	.607 (15.42) .603 (15.32)	.579 (14.71) .575 (14.61)	.689 (17.50) .685 (17.40)	.036 (0.91) .031 (0.79)	.525 (13.34)
10	.6875-24	.732 (18.59) .728 (18.49)	.714 (18.14) .710 (18.03)	.814 (20.68) .810 (20.57)	.036 (0.91) .031 (0.79)	.650 (16.51)
12	.875-20	.919 (23.34) .915 (23.24)	.894 (22.71) .890 (22.61)	1.001 (25.43) .997 (25.32)	.036 (0.91) .031 (0.79)	.840 (21.34)
14	.9375-20	.982 (24.94) .978 (24.84)	.954 (24.23) .950 (24.13)	1.064 (27.03) 1.060 (26.92)	.036 (0.91) .031 (0.79)	.900 (22.86)
16	1.0625-18	1.107 (28.12) 1.103 (28.02)	1.079 (27.41) 1.075 (27.31)	1.189 (30.20) 1.185 (30.10)	.036 (0.91) .031 (0.79)	1.025 (26.04)
18	1.1875-18	1.232 (31.29) 1.228 (31.19)	1.204 (30.58) 1.200 (30.48)	1.330 (33.78) 1.326 (33.68)	.044 (1.12) .039 (0.99)	1.150 (29.21)
20	1.3125-18	1.357 (34.47) 1.353 (34.37)	1.329 (33.76) 1.325 (33.66)	1.455 (36.96) 1.451 (36.86)	.044 (1.12) .039 (0.99)	1.275 (32.39)
22	1.4375-18	1.482 (37.64) 1.478 (37.54)	1.454 (36.93) 1.450 (36.83)	1.580 (40.13) 1.576 (40.03)	.044 (1.12) .039 (0.99)	1.400 (35.56)
24	1.5625-18	1.607 (40.82) 1.603 (40.72)	1.579 (40.11) 1.575 (40.01)	1.705 (43.31) 1.701 (43.21)	.044 (1.12) .039 (0.99)	1.525 (38.74)

NOTES:
1. Dimensions are in inches. Dimensions apply after plating.
2. Metric equivalents are given for information only. Metric equivalents are in parentheses.
3. Unless otherwise specified, tolerances shall be ± .005 (0.13) for three place decimal places, ± .01 (0.25) for two place decimal places and ± 1/2° for all angles.
4. Coupling indicator line shall be color coded blue .025 ± .010 (0.64 ± 0.25) wide.

FIGURE 1. Receptacle, adapter, dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:21Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figure 1.

For insert arrangement, see MIL-STD-1554.

For connector accessories, see SAE-AS85049.

This adapter is intended to be assembled to series III threaded coupling receptacles, including MIL-DTL-83723/82, MIL-DTL-83723/83, MIL-DTL-83723/84, MIL-DTL-83723/85, MIL-DTL-83723/88, MIL-DTL-83723/89 and MIL-DTL-83723/90.

This adapter shall be secured permanently to the receptacle, using a compatible thread seizing compound.

The above-referenced receptacle-adapter assemblies are intended to mate with applicable quick-disconnect push-pull plugs, including MIL-DTL-83723/66 through MIL-DTL-83723/69 (pin or socket).

Materials:


Aluminum alloy.

Qualification:

Examination of product.
Coupling torque.
Salt spray (corrosion).
Coupling torque.

Marking:

Part or Identifying Number (PIN) example:

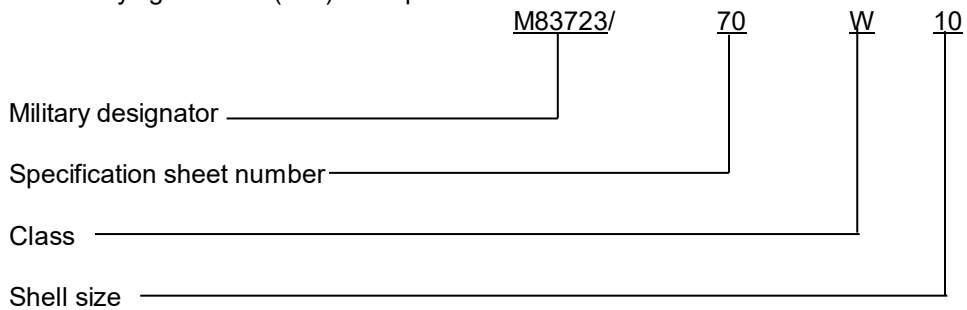

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:21Z
Check the source to verify that this is the current version before use.

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents. In addition to MIL-DTL-83723, this document references the following:

MIL-STD-1554
MIL-DTL-83723/66
MIL-DTL-83723/67
MIL-DTL-83723/68
MIL-DTL-83723/69
MIL-DTL-83723/82
MIL-DTL-83723/83
MIL-DTL-83723/84
MIL-DTL-83723/85
MIL-DTL-83723/88
MIL-DTL-83723/89
MIL-DTL-83723/90
SAE-AS85049

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-2019-107)

Review activity:
Air Force – 70

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:21Z
Check the source to verify that this is the current version before use.