INCH - POUND

MIL-C-83723/71B
30 June 1992
SUPERSEDING
MIL-C-83723/71A
13 November 1975

MILITARY SPECIFICATION SHEET

(B) CONNECTORS, ELECTRICAL, (CIRCULAR, ENVIRONMENT RESISTING), RECEPTACLE, (FLANGE MOUNT, BAYNOET COUPLING, CRIMP SOCKET CONTACT) SERIES III, CLASSES A, G, R, AND W

(B) This specification is approved for use by all Departments and Agencies of the Department of Defense.

(B) The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specific in the solicitation: MIL-C-83723


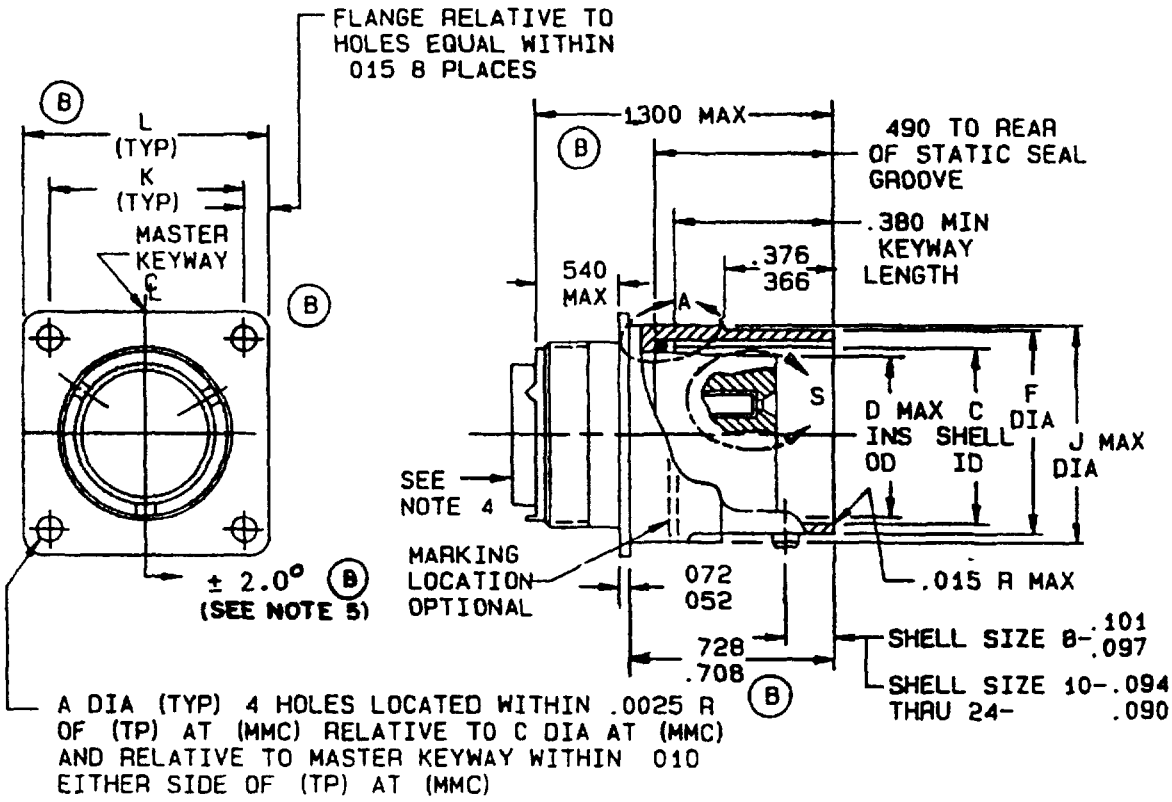


FIGURE 1 Dimensions and configurations


(B) denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:21Z
Check the source to verify that this is the current version before use.




DETAIL A

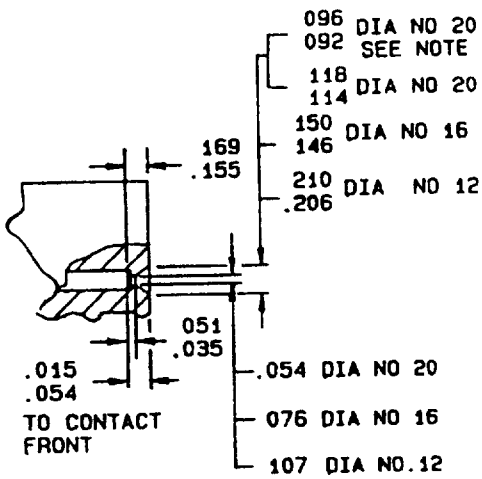

NOTE. SEE TABLE I FOR CONTACT CAVITIES REQUIRING THIS DIMENSION

DETAIL S

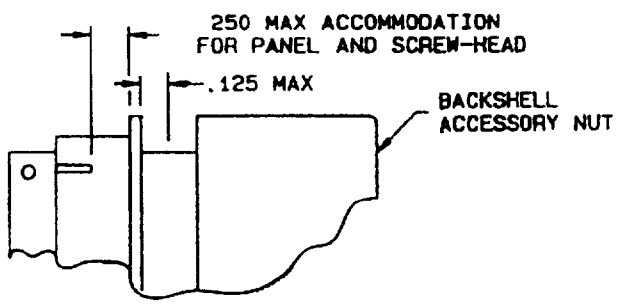

MAX PANEL THICKNESS (TYP)

FIGURE 1 Dimensions and configurations - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:21Z
Check the source to verify that this is the current version before use.

Ⓑ

Shell size	A	C	D	F	J	K	L	S +.005 - 000
8	120	.428 .433	.312	.536 .531	.561	.594	.812	508
10	.120	.530 .535	.388	.659 .654	.696	.719	.937	.636
12	.120	.700 .705	.558	.829 .824	.875	.812	1.031	.806
14	.120	.769 .774	.627	.898 .893	.935	.906	1.125	.875
16	.120	.869 .901	.772	1.025 1.020	1.062	.969	1.250	1.002
18	.120	1 002 1.007	.860	1.131 1.126	1.187	1.062	1.343	1.108
20	.120	1.127 1.132	.985	1.256 1.251	1.312	1.156	1.437	1.233
22	.120	1.252 1.257	1.110	1.381 1.376	1.437	1.250	1.562	1.358
24	.149	1.377 1.382	1.235	1.506 1.501	1.562	1.375	1.703	1.483

FIGURE 1 Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:21Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
0025	.06	.210	5.33	.591	15.01	950	24.13	1 454	36 93
004	10	237	6.02	594	15.09	969	24 61	1 492	37 90
.005	13	242	6.15	601	15 27	985	25 02	1 501	38 13
010	.25	.250	6.35	.610	15 49	1.002	25 45	1.506	38 25
015	38	.288	7.32	627	15.93	1.007	25.58	1.516	38 51
.025	.64	.293	7.44	649	16 48	1 010	25.65	1.557	39 55
035	.89	301	7.65	654	16 61	1 020	25 91	1 562	39 67
.051	1.30	.310	7.87	659	16 74	1 025	26 04	1 616	40 05
.052	1 32	.312	7.92	.664	16 87	1 031	26 19	1 627	41 33
.054	1.37	.365	9.27	.673	17.09	1.062	26.97	1.703	43.26
.063	1.60	.366	9.30	.696	17.68	1 070	27 18	1.717	43.61
.068	1.73	373	9.47	.700	17 78	1.110	28.19	1.746	44.35
.072	1.83	.374	9.50	705	17 91	1.125	28 58	1.852	47 04
.076	1.93	.376	9.55	.708	17 98	1.126	28 60	1 907	48.44
.077	1.96	.380	9.65	.711	18.06	1.127	28.63	1.951	49.56
.084	2.13	.388	9.86	.716	18.19	1.130	28.70	1.976	50.19
.089	2.26	.408	10.36	.719	18 26	1.131	28.73	2.084	52.93
090	2.29	.413	10.49	726	18 44	1.132	28.75	2 086	52 98
.091	2.31	428	10.87	728	18 49	1.156	29.36	2 142	54 41
.092	2.34	433	11.00	.735	18 67	1 187	30 15	2.181	55.40
.094	2 39	.450	11.43	.769	19.53	1.190	30.23	2.204	55.98
.096	2.44	.459	11.66	772	19 61	1 219	30 96	2.206	56.03
.097	2.46	471	11 96	774	19 66	1 235	31 37	2.207	56.06
.101	2.57	.476	12.09	.789	20.04	1.250	31.75	2.304	58.52
.105	2.67	.485	12.32	798	20.27	1.251	31.78	2.315	58 80
.107	2.72	490	12.45	812	20 62	1.252	31.80	2.329	59.16
.114	2 90	494	12.55	.824	20 93	1.256	31.90	2.405	61.09
.118	3.00	.524	13.31	.829	21.06	1.257	31.93	2 434	61.82
.120	3.05	529	13.44	.830	21 08	1.260	32 00	2 446	62.13
.122	3.10	.530	13.46	.860	21.84	1.300	33.02	2.540	64 52
125	3.18	.531	13.49	.869	22.07	1.312	33.32	2.639	67 03
128	3.25	.535	13.59	.875	22.23	1.320	33.53	2 664	67.67
140	3.56	536	13.61	.880	22.35	1.343	34.11	2 772	70.41
.146	3.71	.540	13.72	.893	22 68	1 375	34 93	2.894	73.51
.149	3.78	548	13.92	.896	22.76	1 376	34 95	2.895	73.53
150	3.81	.557	14.15	.898	22.81	1 377	34.98	3.017	76.63
155	3.94	558	14.17	.901	22.89	1.381	35.08	3.134	79.60
169	4.29	.560	14.22	.906	23 01	1 382	35.10	3.250	82.55
190	4 83	561	14.25	935	23 75	1 389	35 28	4 166	105 82
206	5.23	586	14.88	937	23 80	1 437	36 50	4.854	123 29

FIGURE 1 Dimensions and configurations - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:21Z
Check the source to verify that this is the current version before use.

NOTES:
1. Dimensions are in inches
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.005 (0 13 mm) for three place decimals and ± 01 (0 3 mm) for two place decimals and ±1 for all angles
4. Rear accessory interchangeability dimensions shall be in accordance with MIL-C-83723 and MIL-C-85049
5. The centerline of indicated projection must be located on vertical centerline within 2°.

FIGURE 1 Dimensions and configurations - Continued.

TABLE I. Insert arrangements requiring reduced diameters for lead-in chamfer on contact cavities

Shell size	Insert arrangements	Contact cavities
8	-3	1, 2, 3
10	-6	1, 2, 3, 4, 5, 6

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:21Z
Check the source to verify that this is the current version before use.

REQUIREMENTS


(B) Dimensions and configurations See figure 1

(B) For insert arrangement, see MIL-STD-1554

(B) For connector accessories, see MIL-C-85049

This connector mate with MIL-C-83723/76 and MIL-C-83723/78

(B) Part or Identifying Number (PIN) example

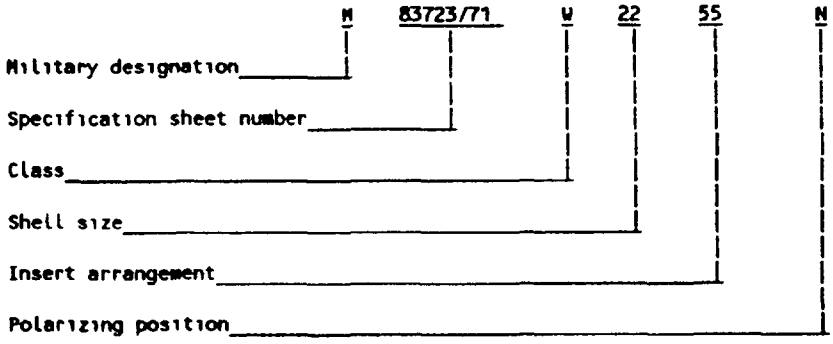

CONCLUDING MATERIAL

Custodian:
Army - CR
Navy - AS

Review activities
Army - AR, MI
Navy - EC
Air Force - 11, 15, 17, 80
DLA - ES

Preparing activity
Air Force - 85

Agent:
DLA - ES

(Project 5935-3728-04)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:21Z
Check the source to verify that this is the current version before use.