INCH-POUND
MIL-DTL-83723/78E
w/AMENDMENT 1
8 March 2024
SUPERSEDING
MIL-DTL-83723/78E
19 August 2009

DETAIL SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, (CIRCULAR, ENVIRONMENT RESISTING),
PLUG, (RFI, BAYONET COUPLING, CRIMP PIN CONTACT),
(SERIES III, CLASSES G, M, R, T, W, AND Z)

This specification is approved for use by all Departments
and Agencies of the Department of Defense.

The requirements for acquiring the product described herein
shall consist of this specification sheet and MIL-DTL-83723.

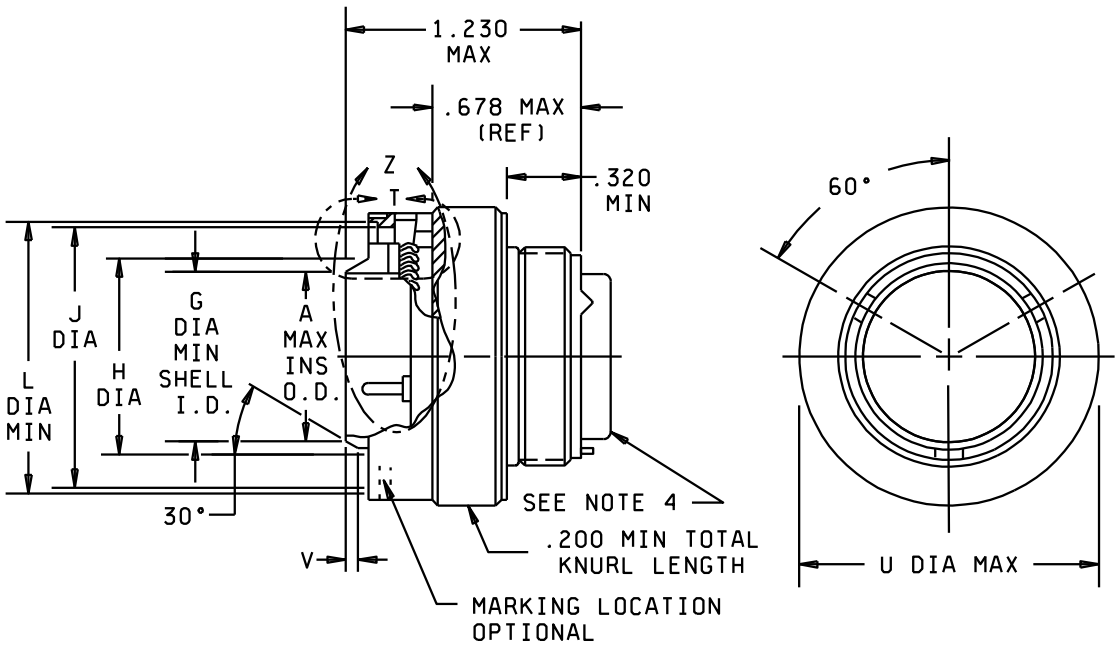


FIGURE 1. Dimensions and configurations.

AMSC N/A

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.

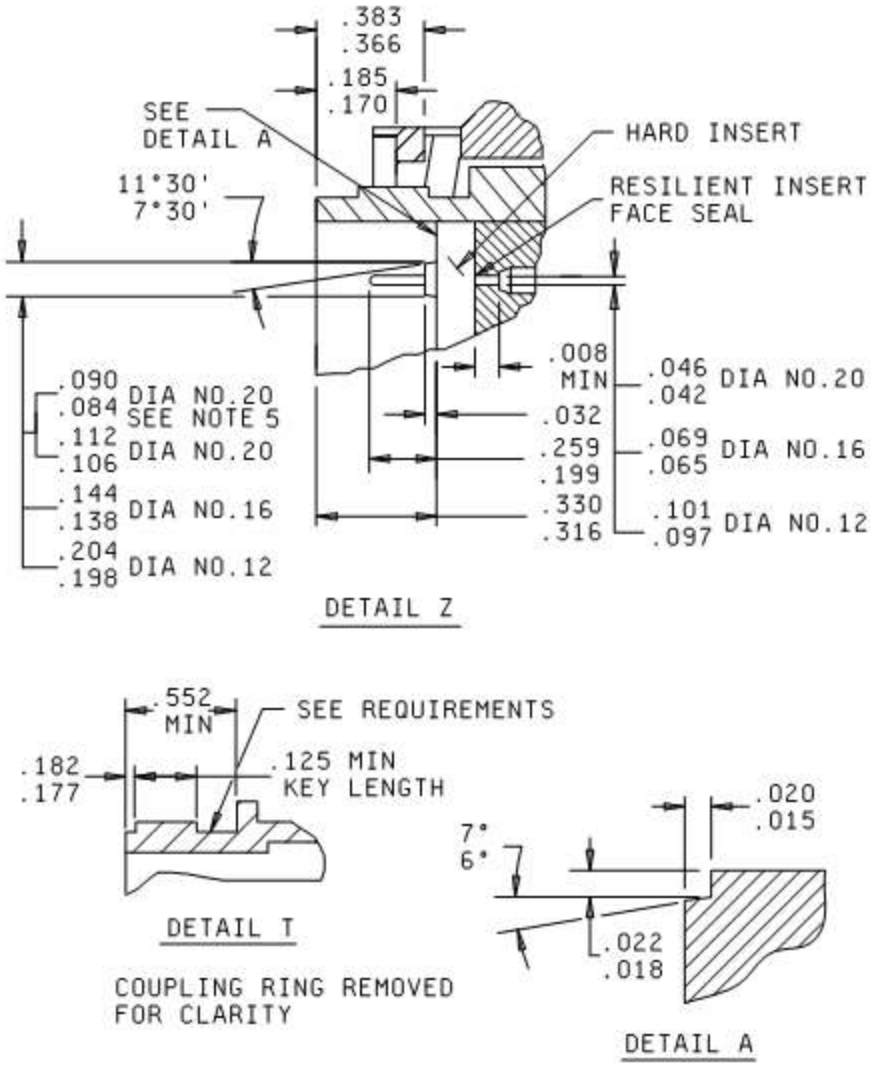


FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.

Shell size	A max	G min	H	J	L min	U max	V
08	.312	.352	.415 .424	.540 .545	.632	.776	.025
10	.388	.428	.517 .526	.662 .667	.760	.906	.031
12	.558	.598	.687 .696	.832 .837	.930	1.078	.031
14	.627	.667	.756 .765	.901 .906	.999	1.141	.031
16	.772	.794	.883 .892	1.028 1.033	1.126	1.266	.031
18	.860	.900	.989 .998	1.134 1.139	1.232	1.375	.031
20	.985	1.025	1.114 1.123	1.261 1.266	1.357	1.510	.031
22	1.110	1.150	1.239 1.248	1.384 1.389	1.482	1.625	.031
24	1.235	1.275	1.364 1.373	1.511 1.516	1.607	1.760	.031

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.008	0.20	.177	4.50	.552	14.20	.900	22.86	1.232	31.29
.015	0.38	.182	4.62	.558	14.17	.901	22.89	1.235	31.37
.018	0.48	.185	4.70	.598	15.19	.906	23.01	1.239	31.47
.020	0.51	.200	5.08	.627	15.93	.930	23.62	1.248	31.70
.022	0.56	.204	5.18	.632	16.05	.985	25.02	1.261	32.03
.025	0.64	.259	6.58	.662	16.81	.989	25.12	1.266	32.16
.031	0.79	.312	7.92	.667	16.94	.998	25.35	1.275	32.39
.032	0.81	.316	8.03	.678	17.22	.999	25.37	1.357	34.47
.042	1.07	.320	8.13	.687	17.45	1.025	26.04	1.373	34.87
.046	1.17	.330	8.38	.696	17.68	1.028	19.84	1.375	34.93
.065	1.65	.352	8.94	.756	19.20	1.033	26.24	1.384	35.15
.069	1.75	.366	9.30	.760	19.30	1.078	27.38	1.389	35.28
.090	2.29	.383	9.73	.765	19.43	1.110	28.19	1.482	37.64
.097	2.46	.388	9.86	.772	19.61	1.114	28.30	1.510	38.35
.101	2.57	.415	10.54	.776	19.71	1.123	28.52	1.511	38.38
.106	2.69	.424	10.77	.794	20.17	1.126	28.60	1.516	38.51
.112	2.84	.428	10.87	.832	21.13	1.134	28.80	1.607	40.82
.125	3.18	.517	13.13	.837	21.26	1.139	28.93	1.625	41.28
.138	3.51	.526	13.36	.860	21.84	1.141	28.98	1.760	44.70
.144	3.66	.540	13.72	.883	22.43	1.150	29.21		
.170	4.32	.545	13.84	.892	22.66	1.230	31.24		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerances are ± .005 (0.13 mm) for three place decimals and ± .01 (0.25 mm) for two place decimals and ± 1° for all angles.
4. Rear accessory interchangeability dimensions shall be in accordance with MIL-DTL-83723.
5. See table I for contact cavities requiring this dimension.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figure 1.

For insert arrangements, see MIL-STD-1554 and table I.

TABLE I. Inserts requiring reduced diameters for raised seal barriers on contact cavities.

Shell size	Insert arrangements	Contact cavities
08	03	1, 2, 3
10	06	1, 2, 3, 4, 5, 6

For connector accessories, see SAE-AS85049.

This connector mates with MIL-DTL-83723/71 and MIL-DTL-83723/73.

Mating force: Shall not exceed the values specified in the procurement document by more than 20 percent.

RFI spring strip shall have a minimum of six fingers per inch and shall point to rear of connector.

Part or Identifying Number (PIN) example:

M83723/ 78 W 08 55 N

M83723/	Military designation
78	Specification sheet number
W	Class
08	Shell size
55	Insert arrangement
N	Polarizing position

Referenced documents. In addition to MIL-DTL-83723, this document references the following:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.

MIL-DTL-83723/71
MIL-DTL-83723/73
MIL-STD-1554
SAE-AS85049

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

Review activities:
Army - AR, MI
Navy - EC
Air Force – 19, 99

(Project 5935-2024-057)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.