
MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, (CIRCULAR, ENVIRONMENT RESISTING), PLUG, (THREADED COUPLING, CRIMP PIN CONTACT), (SERIES III, CLASSES A, G, K, AND R)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the connector described herein shall consist of this document and the latest issue of Specification MIL-C-83723.

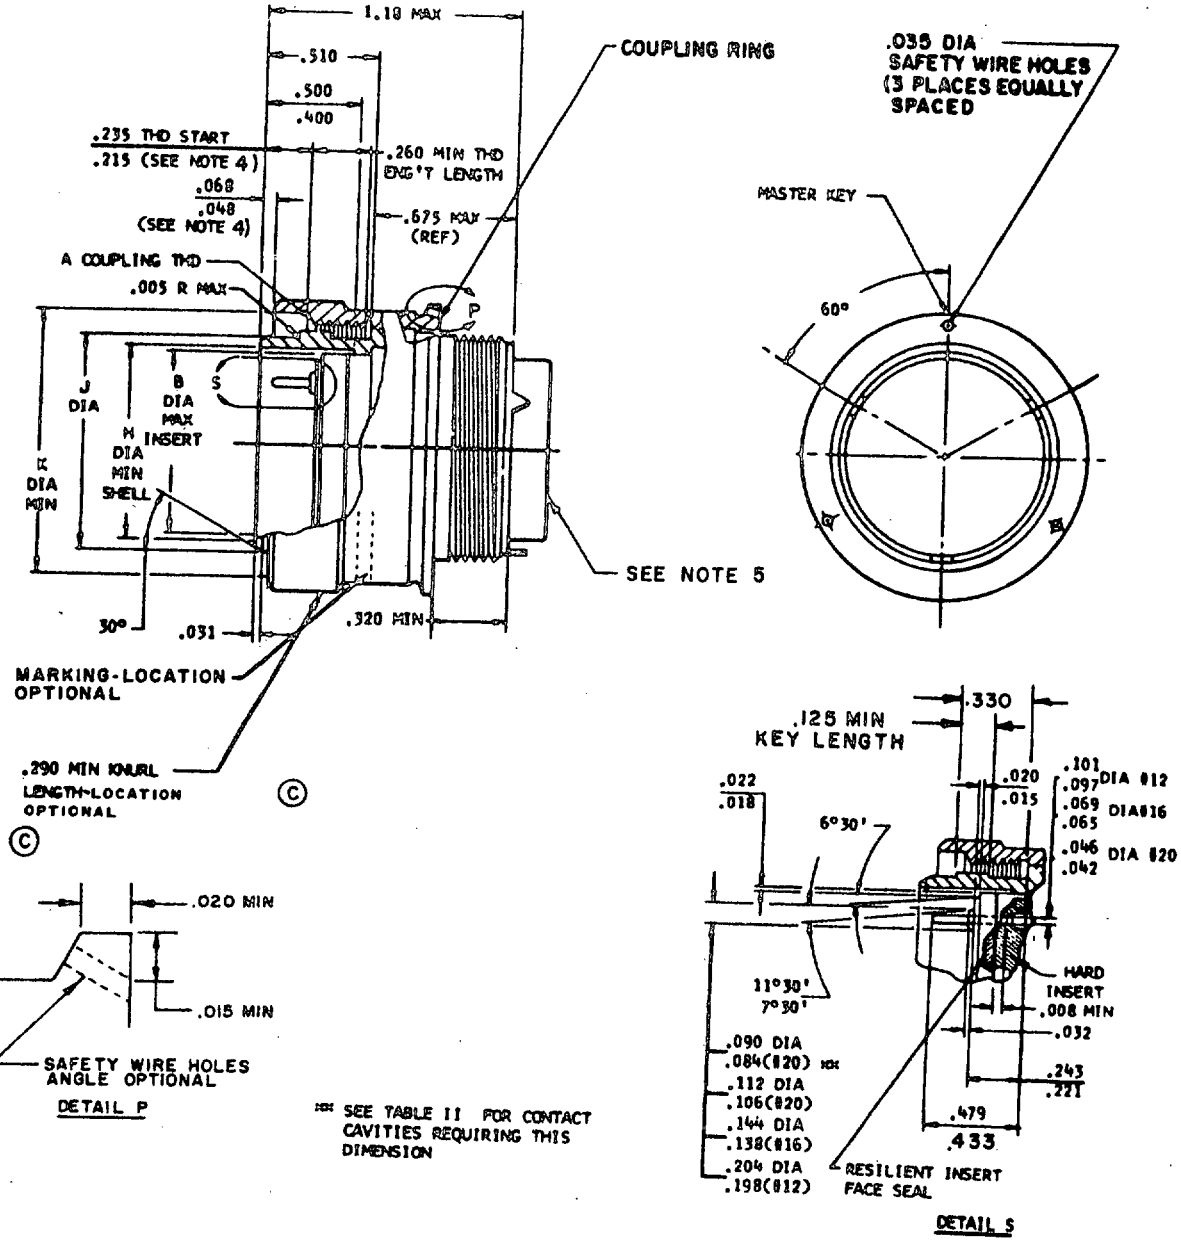

*** SEE TABLE II FOR CONTACT CAVITIES REQUIRING THIS DIMENSION

© denotes changes

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:23Z
Check the source to verify that this is the current version before use.

TABLE I. Connector dimensions.

Shell size	A Thread	B	H	J	K
8	.562-24 UNEF-2B	.290	.294	.400 .405	.575
10	.688-24 UNEF-2B	.388	.428	.526 .521	.707
12	.875-20 UNEF-2B	.558	.598	.696 .691	.895
14	.938-20 UNEF-2B	.627	.667	.765 .760	.957
16	1.062-18 UNEF-2B	.772	.794	.892 .887	1.084
18	1.188-18 UNEF-2B	.860	.900	.998 .993	1.209
20	1.312-18 UNEF-2B	.985	1.025	1.123 1.118	1.334
22	1.438-18 UNEF-2B	1.110	1.150	1.248 1.243	1.459
24	1.562-18 UNEF-2B	1.235	1.275	1.373 1.368	1.584

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:23Z
Check the source to verify that this is the current version before use.

TABLE II. Insert arrangements requiring reduced diameters for raised seal barriers on outer row of contact cavities as indicated.

Shell size	Insert arrangements	Contact cavities
8	-3	1, 2, and 3

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.005	.13	.144	3.66	.558	14.17	.985	25.02
.008	.20	.198	5.03	.562	14.27	.993	25.22
.015	.38	.204	5.18	.575	14.61	.998	25.35
.018	.46	.215	5.46	.598	15.19	1.025	26.04
.020	.51	.221	5.61	.627	15.93	1.062	26.97
.022	.56	.235	5.97	.667	16.94	1.084	27.53
.031	.79	.243	6.17	.675	17.15	1.110	28.19
.032	.81	.260	6.60	.688	17.48	1.118	28.40
.035	.89	.290	7.37	.691	17.55	1.123	28.52
.042	1.07	.294	7.47	.696	17.68	1.150	29.21
.046	1.17	.320	8.13	.707	17.96	1.180	29.97
.048	1.22	.330	8.38	.760	19.30	1.188	30.18
.064	1.63	.388	9.86	.765	19.43	1.209	30.71
.065	1.65	.400	10.16	.772	19.61	1.235	31.37
.068	1.73	.405	10.29	.794	20.17	1.243	31.57
.069	1.75	.410	10.41	.860	21.84	1.248	31.70
.081	2.06	.428	10.87	.875	22.22	1.275	32.38
.090	2.29	.433	11.00	.887	22.53	1.312	33.32
.097	2.46	.479	12.17	.892	22.66	1.334	33.88
.101	2.57	.500	12.70	.895	22.73	1.368	34.75
.106	2.69	.510	12.95	.900	22.86	1.373	34.87
.112	2.84	.521	13.23	.938	23.83	1.438	36.53
.138	3.51	.526	13.36	.957	24.31	1.459	37.06
						1.562	39.67
						1.584	40.23

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are .005 (.13 mm) for three place decimals and .01 (.25 mm) for two place decimals. Angles ±1°.
4. The dimensions showing relationship of coupling ring to shell apply only when coupling ring is in the fully forward position.
5. Rear accessory interchangeability dimensions shall be in accordance with MIL-C-83723.
6. Shell size 8 will not mate with MIL-C-26500 connectors.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:23Z
Check the source to verify that this is the current version before use.


REQUIREMENTS:

Dimensions and configuration: See figure.

This connector mates with MIL-C-83723/82 and 84.

For insert arrangements see MIL-STD-1554.

Part number example:

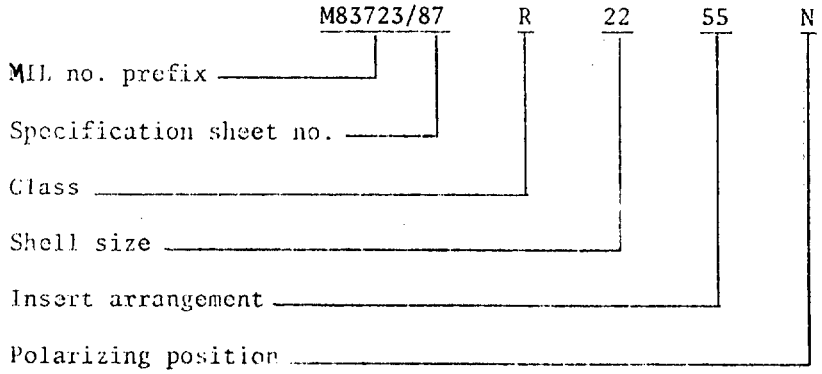

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - MI, AR
Navy - EC
Air Force - 11, 15, 17, 99
DLA - ES

Preparing activity:
Air Force - 85

(Project 5935-3191-2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:23Z
Check the source to verify that this is the current version before use.