
MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, (CIRCULAR, ENVIRONMENT RESISTING), PLUG, (RFI, THREADED COUPLING, CRIMP SOCKET CONTACT), (SERIES III, CLASSES G AND R)

This specification is approved for use by all Departments and Agencies of the Department of Defense.


The complete requirements for procuring the connectors described herein shall consist of this document and the latest issue of Specification MIL-C-83723.

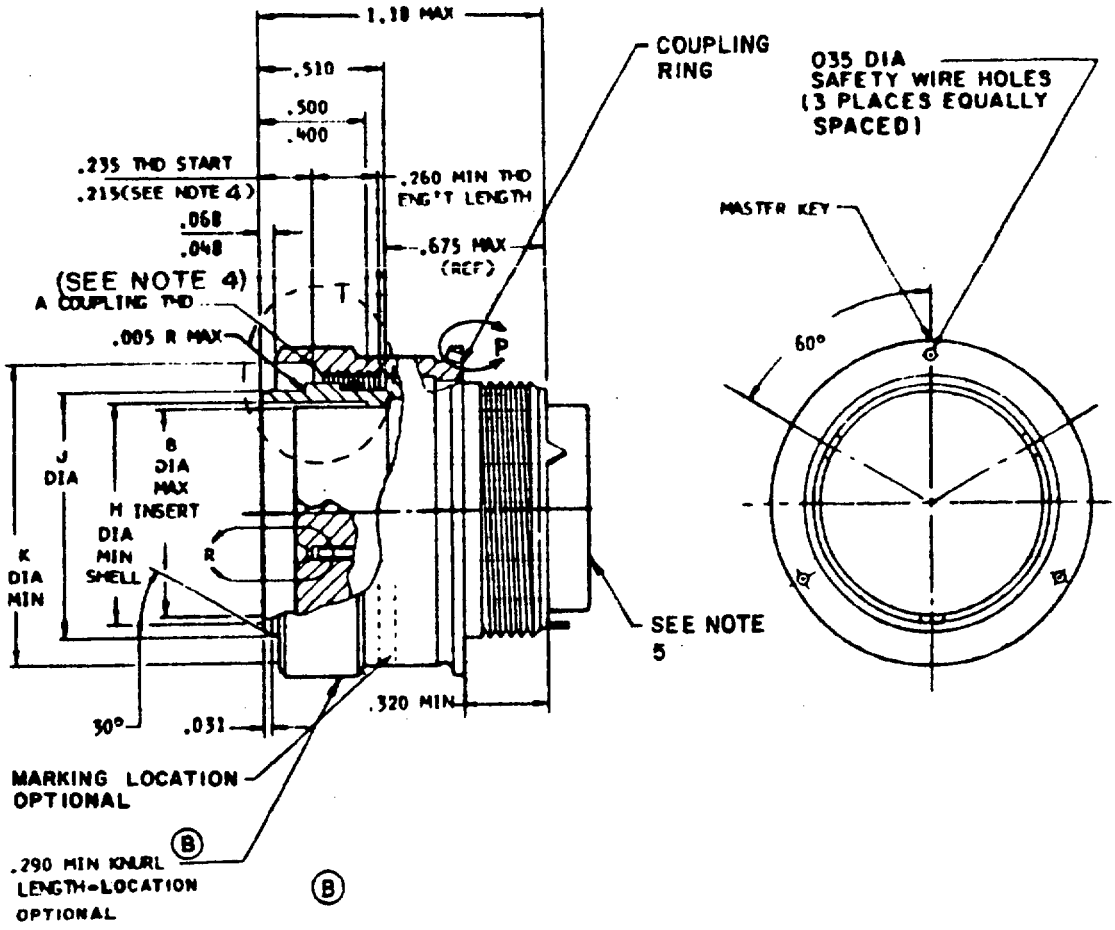


Ⓑ denotes changes

FSC 5935


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:24Z
Check the source to verify that this is the current version before use.

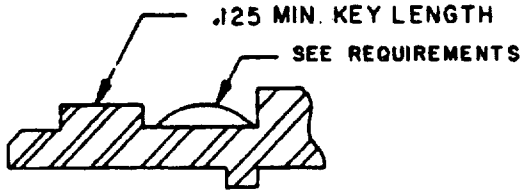

DETAIL T



DETAIL P

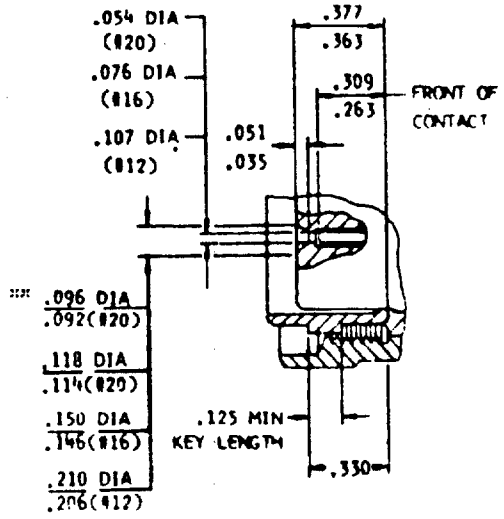

DETAIL R

*** SEE TABLE II FOR CONTACT CAVITIES REQUIRING THIS DIMENSION

TABLE I. Connector dimensions.

Shell size	A Thread	B	H	J	K
8	.562-24 UNEF-2B	.290	.294	.405 .400	.575
10	.688-24 UNEF-2B	.388	.428	.526 .521	.707
12	.875-20 UNEF-2B	.558	.598	.696 .691	.895
14	.938-20 UNEF-2B	.627	.667	.765 .760	.957
16	1.062-18 UNEF-2B	.772	.794	.892 .887	1.084
18	1.188-18 UNEF-2B	.860	.900	.998 .993	1.209
20	1.312-18 UNEF-2B	.985	1.025	1.123 1.118	1.334
22	1.438-18 UNEF-2B	1.110	1.150	1.248 1.243	1.459
24	1.562-18 UNEF-2B	1.235	1.275	1.373 1.368	1.584

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:24Z
Check the source to verify that this is the current version before use.

TABLE II. Insert arrangements requiring reduced diameters for lead-in chamfer on outer row of contact cavities as indicated.

Shell size	Insert arrangements	Contact cavities
8	-3	1, 2, and 3

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.005	.13	.215	5.46	.558	14.17	.993	25.22
.015	.38	.235	5.97	.575	14.61	.998	25.35
.020	.51	.260	6.60	.598	15.19	1.025	26.04
.031	.79	.263	6.68	.627	15.93	1.084	27.53
.035	.89	.290	7.37	.667	16.94	1.110	28.19
.048	1.22	.294	7.47	.675	17.15	1.118	28.40
.051	1.30	.309	7.85	.691	17.55	1.123	28.52
.054	1.37	.320	8.13	.696	17.68	1.150	29.21
.068	1.73	.330	8.38	.707	17.96	1.18	30.0
.076	1.93	.363	9.22	.760	19.30	1.209	30.71
.092	2.34	.377	9.58	.765	19.43	1.235	31.37
.096	2.44	.388	9.86	.772	19.61	1.243	31.57
.107	2.72	.400	10.16	.794	20.17	1.248	31.70
.114	2.90	.405	10.29	.860	21.84	1.260	32.00
.118	3.00	.410	10.41	.887	22.53	1.275	32.38
.125	3.18	.428	10.87	.892	22.66	1.334	33.88
.146	3.71	.500	12.70	.895	22.73	1.368	34.75
.150	3.81	.510	12.95	.900	22.86	1.373	34.87
.206	5.23	.521	13.23	.957	24.31	1.459	37.06
.210	5.33	.526	13.36	.985	25.02	1.584	40.23

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are .005 (.13 mm) for three place decimals and .01 (.3 mm) for two place decimals. Angles ±1°.
4. The dimensions showing relationship of coupling ring to shell apply only when coupling ring is in the fully forward position.
5. Rear accessory interchangeability dimensions shall be in accordance with MIL-C-83723.
6. Shell size 8 will not mate with MIL-C-26500 connectors.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:24Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:


Dimensions and configuration: See figure.

This connector mates with MIL-C-83723/83, 85, 88, 89, and 90.

For insert arrangements see MIL-STD-1554.

RFI spring strip shall have a minimum of six fingers per inch and shall point to rear of connector.

Part number example:

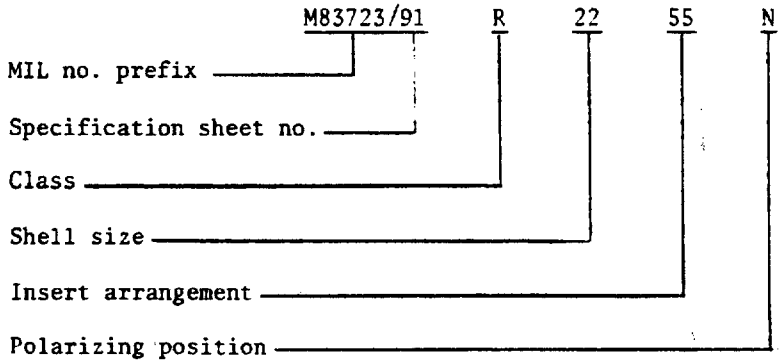

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - MI, AR
Navy - EC
Air Force - 11, 15, 17, 99
DLA - ES

Preparing activity:
Air Force - 85

(Project 5935-3191-3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:24Z
Check the source to verify that this is the current version before use.