
MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, (CIRCULAR, ENVIRONMENT RESISTING), PLUG, (RFI, THREADED COUPLING, CRIMP PIN CONTACT), (SERIES III, CLASSES G AND R)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the connectors described herein shall consist of this document and the latest issue of Specification MIL-C-83723.

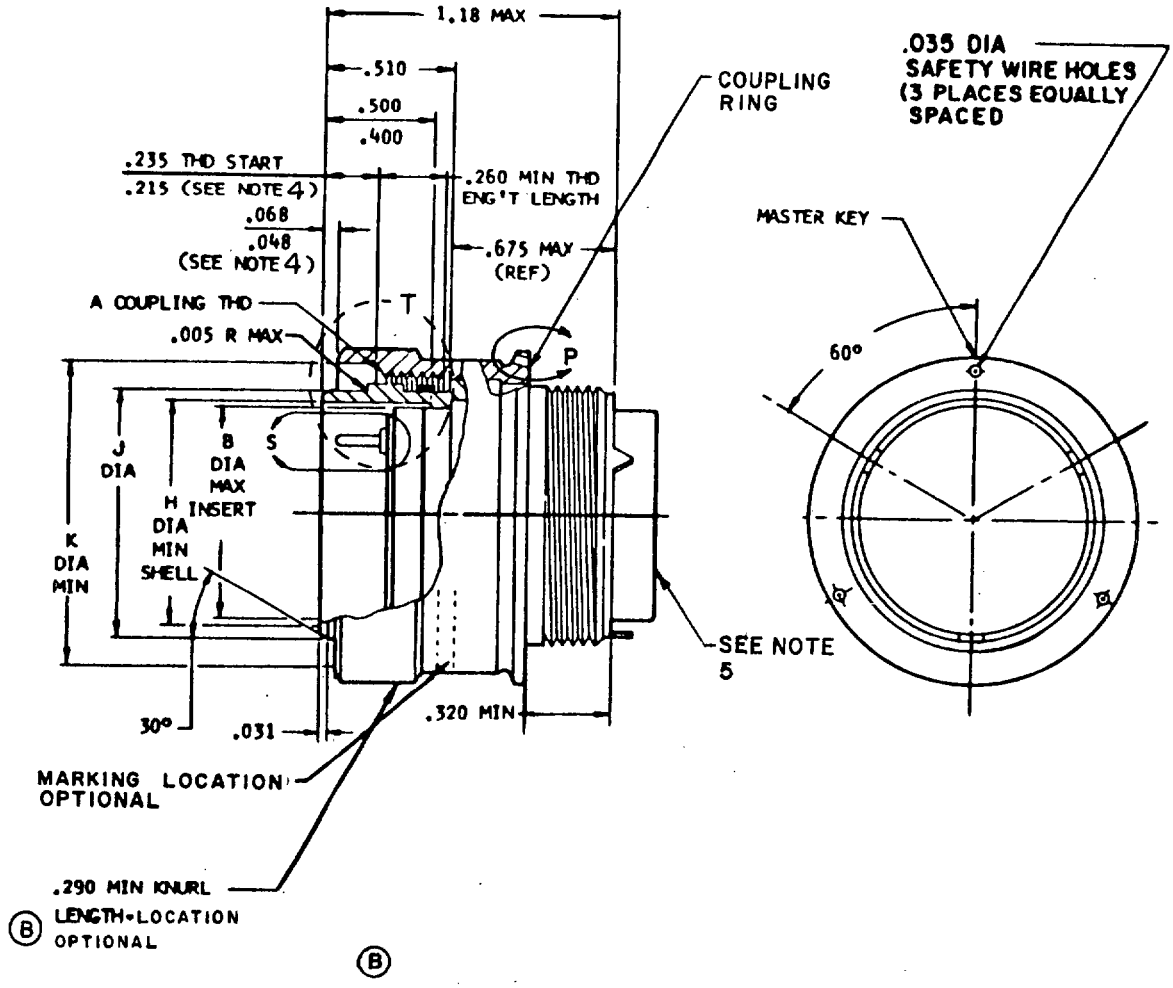

(B)

(B) denotes changes

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:24Z
Check the source to verify that this is the current version before use.

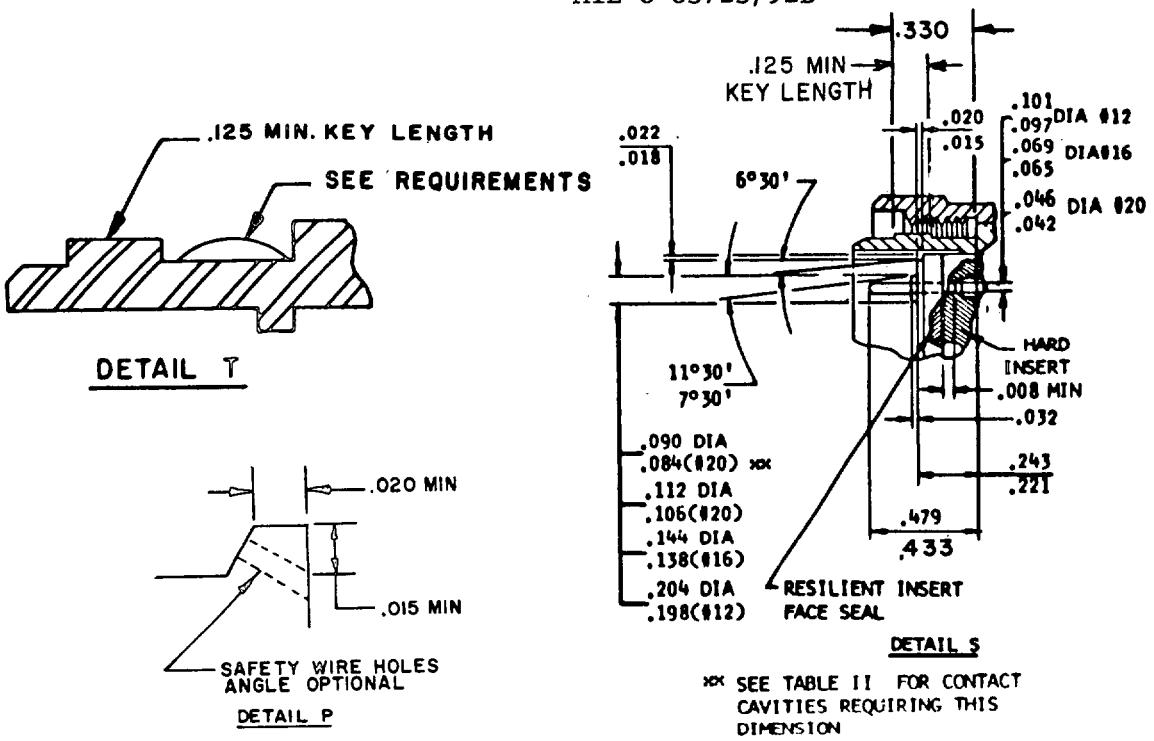


TABLE I. Connector dimensions.

Shell size	A Thread	B	H	J	K
8	.562-24 UNEF-2B	.290	.294	.405 .400	.575
10	.688-24 UNEF-2B	.388	.428	.526 .521	.707
12	.875-20 UNEF-2B	.558	.598	.696 .691	.895
14	.938-20 UNEF-2B	.627	.667	.765 .760	.957
16	1.062-18 UNEF-2B	.772	.794	.892 .887	1.084
18	1.188-18 UNEF-2B	.860	.900	.998 .993	1.209
20	1.312-18 UNEF-2B	.985	1.025	1.123 1.118	1.334
22	1.438-18 UNEF-2B	1.110	1.150	1.248 1.243	1.459
24	1.562-18 UNEF-2B	1.235	1.275	1.373 1.368	1.584

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:24Z
Check the source to verify that this is the current version before use.

TABLE II. Insert arrangements requiring reduced diameters for raised seal barriers on outer row of contact cavities as indicated.

Shell size	Insert arrangements	Contact cavities
8	-3	1, 2, and 3

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.005	.13	.125	3.18	.500	12.70	.900	22.86
.008	.20	.138	3.51	.510	12.95	.957	24.31
.015	.38	.144	3.66	.521	13.23	.985	25.02
.018	.46	.198	5.03	.526	13.36	.993	25.22
.020	.51	.204	5.18	.558	14.17	.998	25.35
.022	.56	.215	5.46	.575	14.61	1.025	26.04
.031	.79	.221	5.61	.598	15.19	1.084	27.53
.032	.81	.235	5.97	.627	15.93	1.110	28.19
.035	.89	.243	6.17	.667	16.94	1.118	28.40
.042	1.07	.260	6.60	.675	17.14	1.123	28.52
.046	1.17	.290	7.37	.691	17.55	1.150	29.21
.048	1.22	.294	7.47	.696	17.68	1.18	30.0
.065	1.65	.320	8.13	.707	17.96	1.209	30.71
.068	1.73	.330	8.38	.760	19.30	1.235	31.37
.069	1.75	.388	9.86	.765	19.43	1.243	31.57
.084	2.13	.400	10.16	.772	19.61	1.248	31.70
.090	2.29	.405	10.29	.794	20.17	1.275	32.38
.097	2.46	.410	10.41	.860	21.84	1.334	33.88
.101	2.57	.428	10.87	.887	22.53	1.368	34.75
.106	2.69	.433	11.00	.892	22.66	1.373	34.87
.112	2.84	.479	12.17	.895	22.73	1.459	37.06
						1.584	40.23

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are .005 (.13 mm) for three place decimals and .01 (.3 mm) for two place decimals. Angles ±1°.
4. The dimensions showing relationship of coupling ring to shell apply only when coupling ring is in the fully forward position.
5. Rear accessory interchangeability dimensions shall be in accordance with MIL-C-83723.
6. Shell size 8 will not mate with MIL-C-26500 connectors.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:24Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:


Dimensions and configuration: See figure.

This connector mates with MIL-C-83723/82 and 84.

For insert arrangements see MIL-STD-1554.

RFI spring strip shall have a minimum of six fingers per inch and shall point to rear of connector.

Part number example:

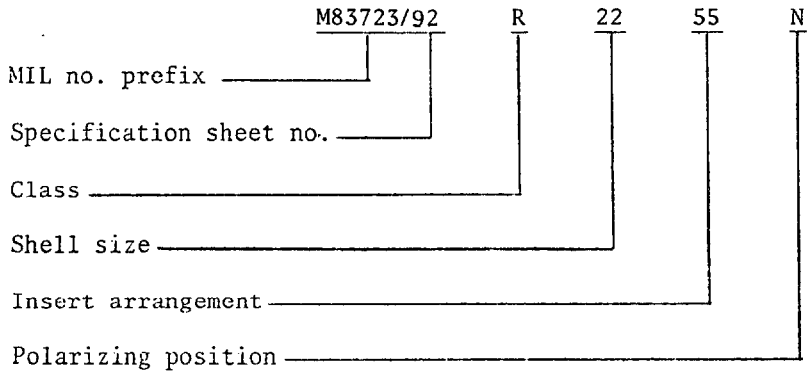

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - MI, AR
Navy - EC
Air Force - 11, 15, 17, 99
DLA - ES

Preparing activity:
Air Force - 85

(Project 5935-3191-4)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:24Z
Check the source to verify that this is the current version before use.