INCH-POUND

MIL-C-83723/92C
24 April 1992

SUPERSEDING
MIL-C-83723/92B
17 April 1981

MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, (CIRCULAR, ENVIRONMENT RESISTING), PLUG, (RFI, THREADED COUPLING, CRIMP PIN CONTACT), (SERIES III, CLASSES G, R, AND W)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

(C) **The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifcations and Standards (DODISS) specified in the solicitation: MIL-C-83723.**

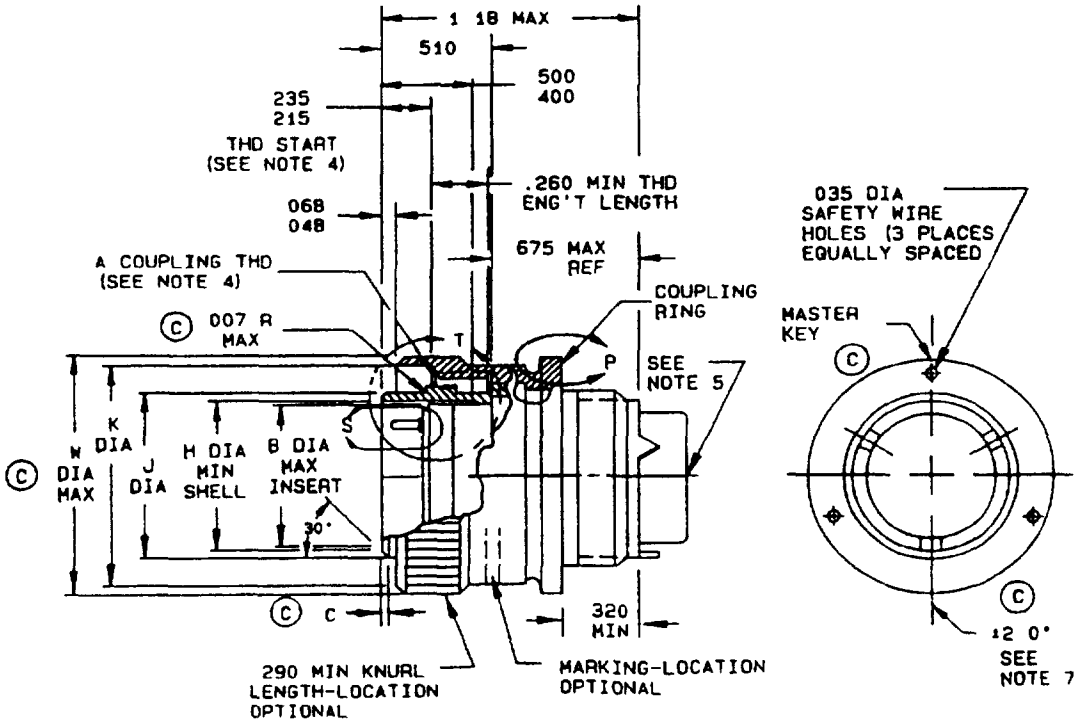


FIGURE 1. Dimensions and configurations.

(C) denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:24Z
Check the source to verify that this is the current version before use.

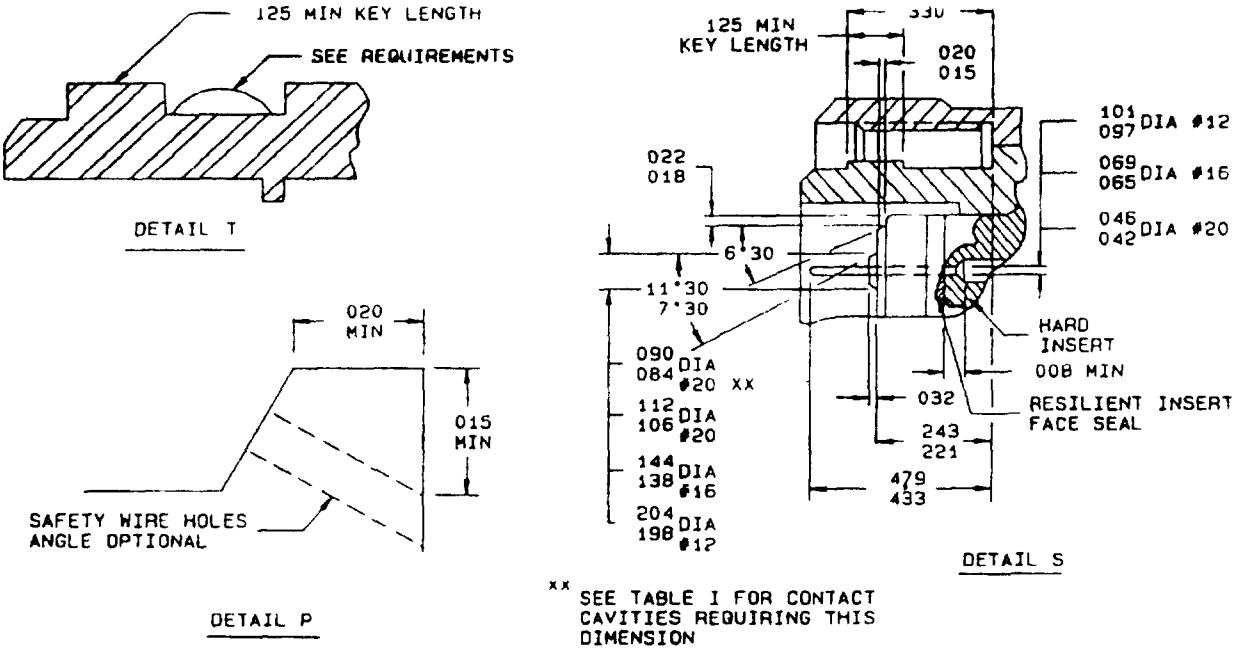


FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:24Z
Check the source to verify that this is the current version before use.

Connectors dimensions.

Shell size	A thread UNEF-2B	B	Ⓒ C	H	J	K	Ⓒ W
8	.562-24	.290	.025	.294	.405 .396	.575	.776
10	.688-24	.388	.031	.428	.526 .517	.707	.906
12	.875-20	.558	.031	.598	.696 .687	.895	1.078
14	.938-20	.627	.031	.667	.765 .756	.957	1.141
16	1.062-18	.772	.031	.794	.892 .883	1.084	1.266
18	1.188-18	.860	.031	.900	.998 .989	1.209	1.375
20	1.312-18	.985	.031	1.025	1.123 1.114	1.334	1.510
22	1.438-18	1.110	.031	1.150	1.248 1.239	1.459	1.625
24	1.562-18	1.235	.031	1.275	1.373 1.364	1.584	1.760

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:24Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.005	0.13	.138	3.51	.575	14.61	1.078	27.38
.007	0.18	.144	3.66	.598	15.91	1.084	27.53
.008	0.20	.198	5.03	.627	15.93	1.110	28.19
.015	0.38	.204	5.18	.667	16.97	1.114	28.30
.018	0.46	.215	5.46	.675	17.14	1.123	28.52
.020	0.51	.215	5.46	.687	17.45	1.141	28.98
.022	0.56	.235	5.97	.691	17.55	1.150	29.21
.025	0.64	.243	6.17	.696	17.68	1.180	30.00
.031	0.79	.260	6.60	.707	17.96	1.209	30.71
.032	0.81	.290	7.37	.756	19.20	1.235	31.37
.035	0.89	.294	7.47	.765	19.43	1.239	31.47
.042	1.07	.330	8.38	.772	19.61	1.248	31.70
.046	1.17	.388	9.86	.776	19.01	1.266	32.15
.048	1.22	.396	10.06	.794	20.17	1.275	32.38
.065	1.65	.400	10.16	.860	21.84	1.334	33.88
.068	1.73	.405	10.29	.883	22.43	1.364	34.65
.069	1.75	.428	10.87	.892	22.66	1.373	34.87
.084	2.13	.433	11.00	.895	22.73	1.375	34.93
.090	2.29	.479	12.17	.900	22.86	1.459	37.06
.097	2.46	.500	12.70	.906	23.01	1.510	38.35
.101	2.57	.510	12.95	.957	24.31	1.584	40.23
.106	2.90	.517	13.13	.985	25.02	1.625	41.28
.112	2.84	.526	13.36	.998	25.35	1.760	44.70
.125	3.18	.558	14.17	1.025	26.04		

NOTES:
1. Dimensions are inches.
2. Metric equivlaents are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are .005 (0.13 mm) for three place decimals and .01 (0.25 mm) for two place decimals. Angles ±1º.
4. The dimensions shoving relationship of coupling to shell apply only when coupling ring is in the fully forward position.
5. Rear accessory interchangeability dimensions shall be in accordance with MIL-C-83723.
6. Shell size 8 will not mate with MIL-C-26500 connectors.
7. The centerline of indicated projection must be located on vertical centerline within 2º.

(C)

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:24Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

This connector mates with MIL-C-83723/82 and 84.

C Insert arrangements and polarizing positions: See MIL-STD-1554 and table I.


TABLE I. Insert arrangements requiring reduced diameters for rasied seal barriers on outer row of contact cavities as indicated.

Shell size	Insert arrangements	Contact cavities
8	C 03	1, 2, and 3
C 10	06	1, 2, 3, 4, 5, 6

C Connector accessories: See MIL-C-85049.

RFI spring strip shall have a minimum of six fingers per inch and shall point to rear of connector.

C Part or Identifying Number (PIN) example:

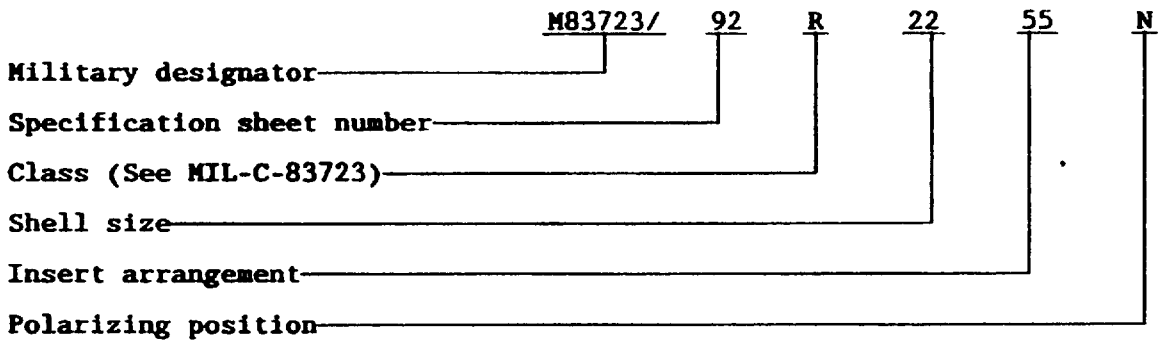

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - AR, MI
Navy - EC
Air Force - 11, 15, 17, 99
DLA - ES

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 5935-3728-25)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:24Z
Check the source to verify that this is the current version before use.